




**Louth County Council
Draft County Development Plan
2009 – 2015
Volume 2
Record of Protected Structures**



**Louth County Council
Draft Development Plan 2009-2015
Record of Protected Structures
Index Grid Map**

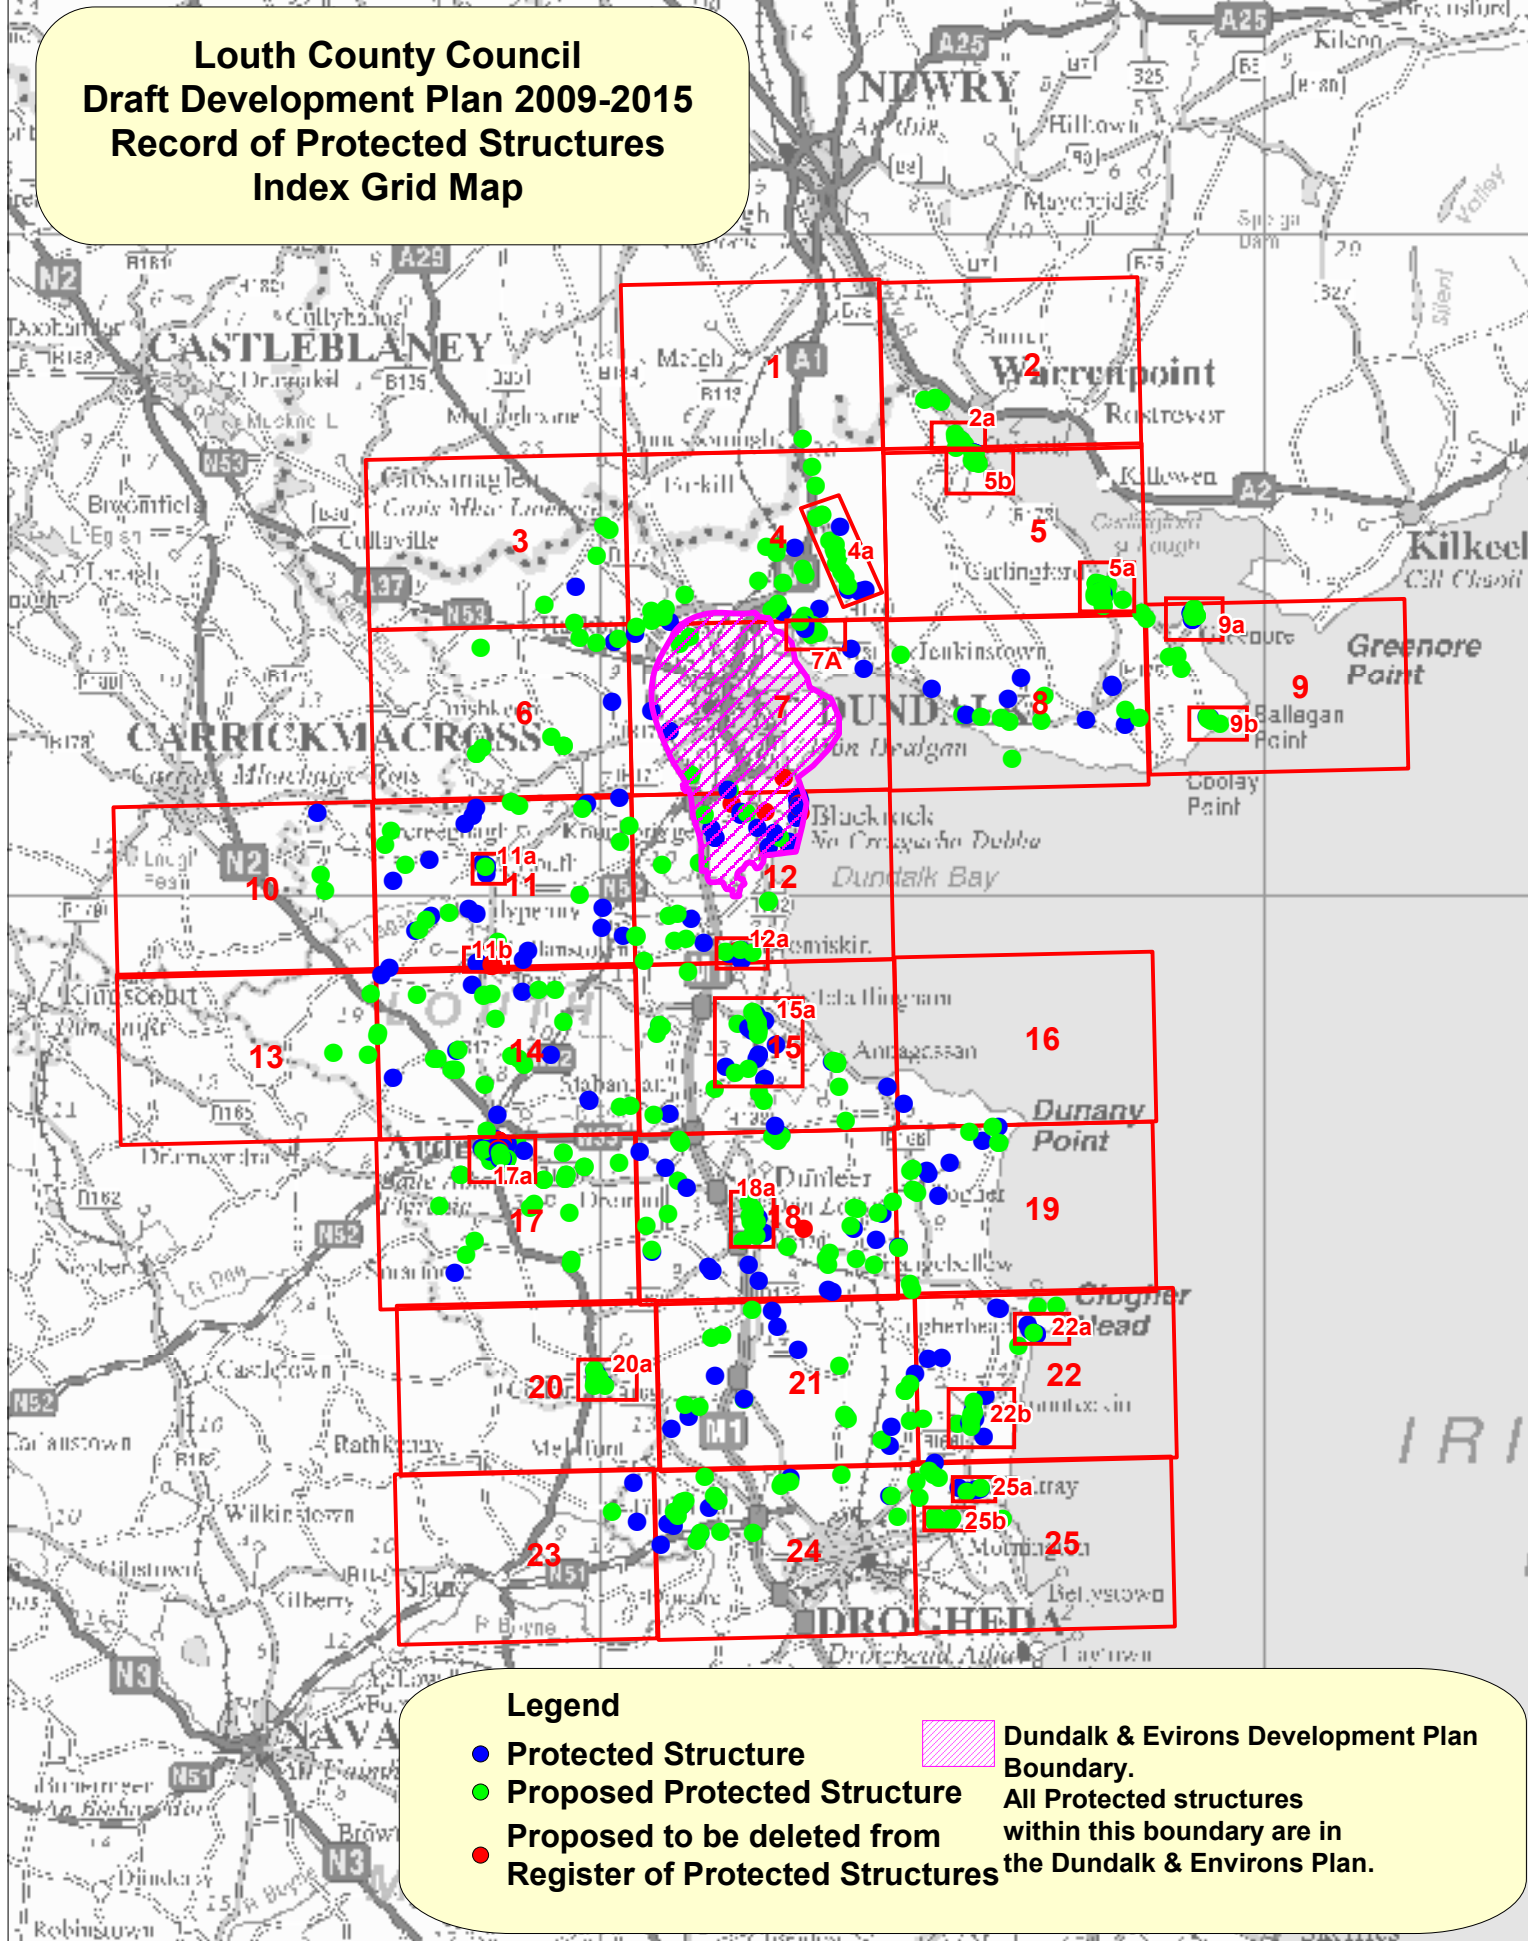

Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie

Note: Details shown on this map are for information purposes only.
Further details on any item should be clarified with Louth County Council.
The map has been produced by Louth County Council with available Local Authority and Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number 2003/07CCMA/
Louth Local Authorities.
Unauthorised reproduction of this map infringes state copyright.





Draft Louth County Development Plan 2009 - 2015.
Proposed Record of Protected Structures.

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Proposed Protected Structure	LHS001-001	1	Ravensdale Park		School	Detached former school, built c. 1830, now in private domestic use.	




Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie

Note: Details shown on this map are for information purposes only.
Further details on any item should be clarified with Louth County Council.
The map has been produced by Louth County Council with available Local Authority and Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number 2009/30/CCMA/LouthLocalAuthorities.

Not to scale when printed A3 Landscape

Louth County Council Record of Protected Structures Sheet No 2

- Protected Structure
- Proposed Protected Structure
- Proposed to be deleted from Register of Protected Structures
- All Protected Structures within this boundary are in the Dundalk & Environs Plan

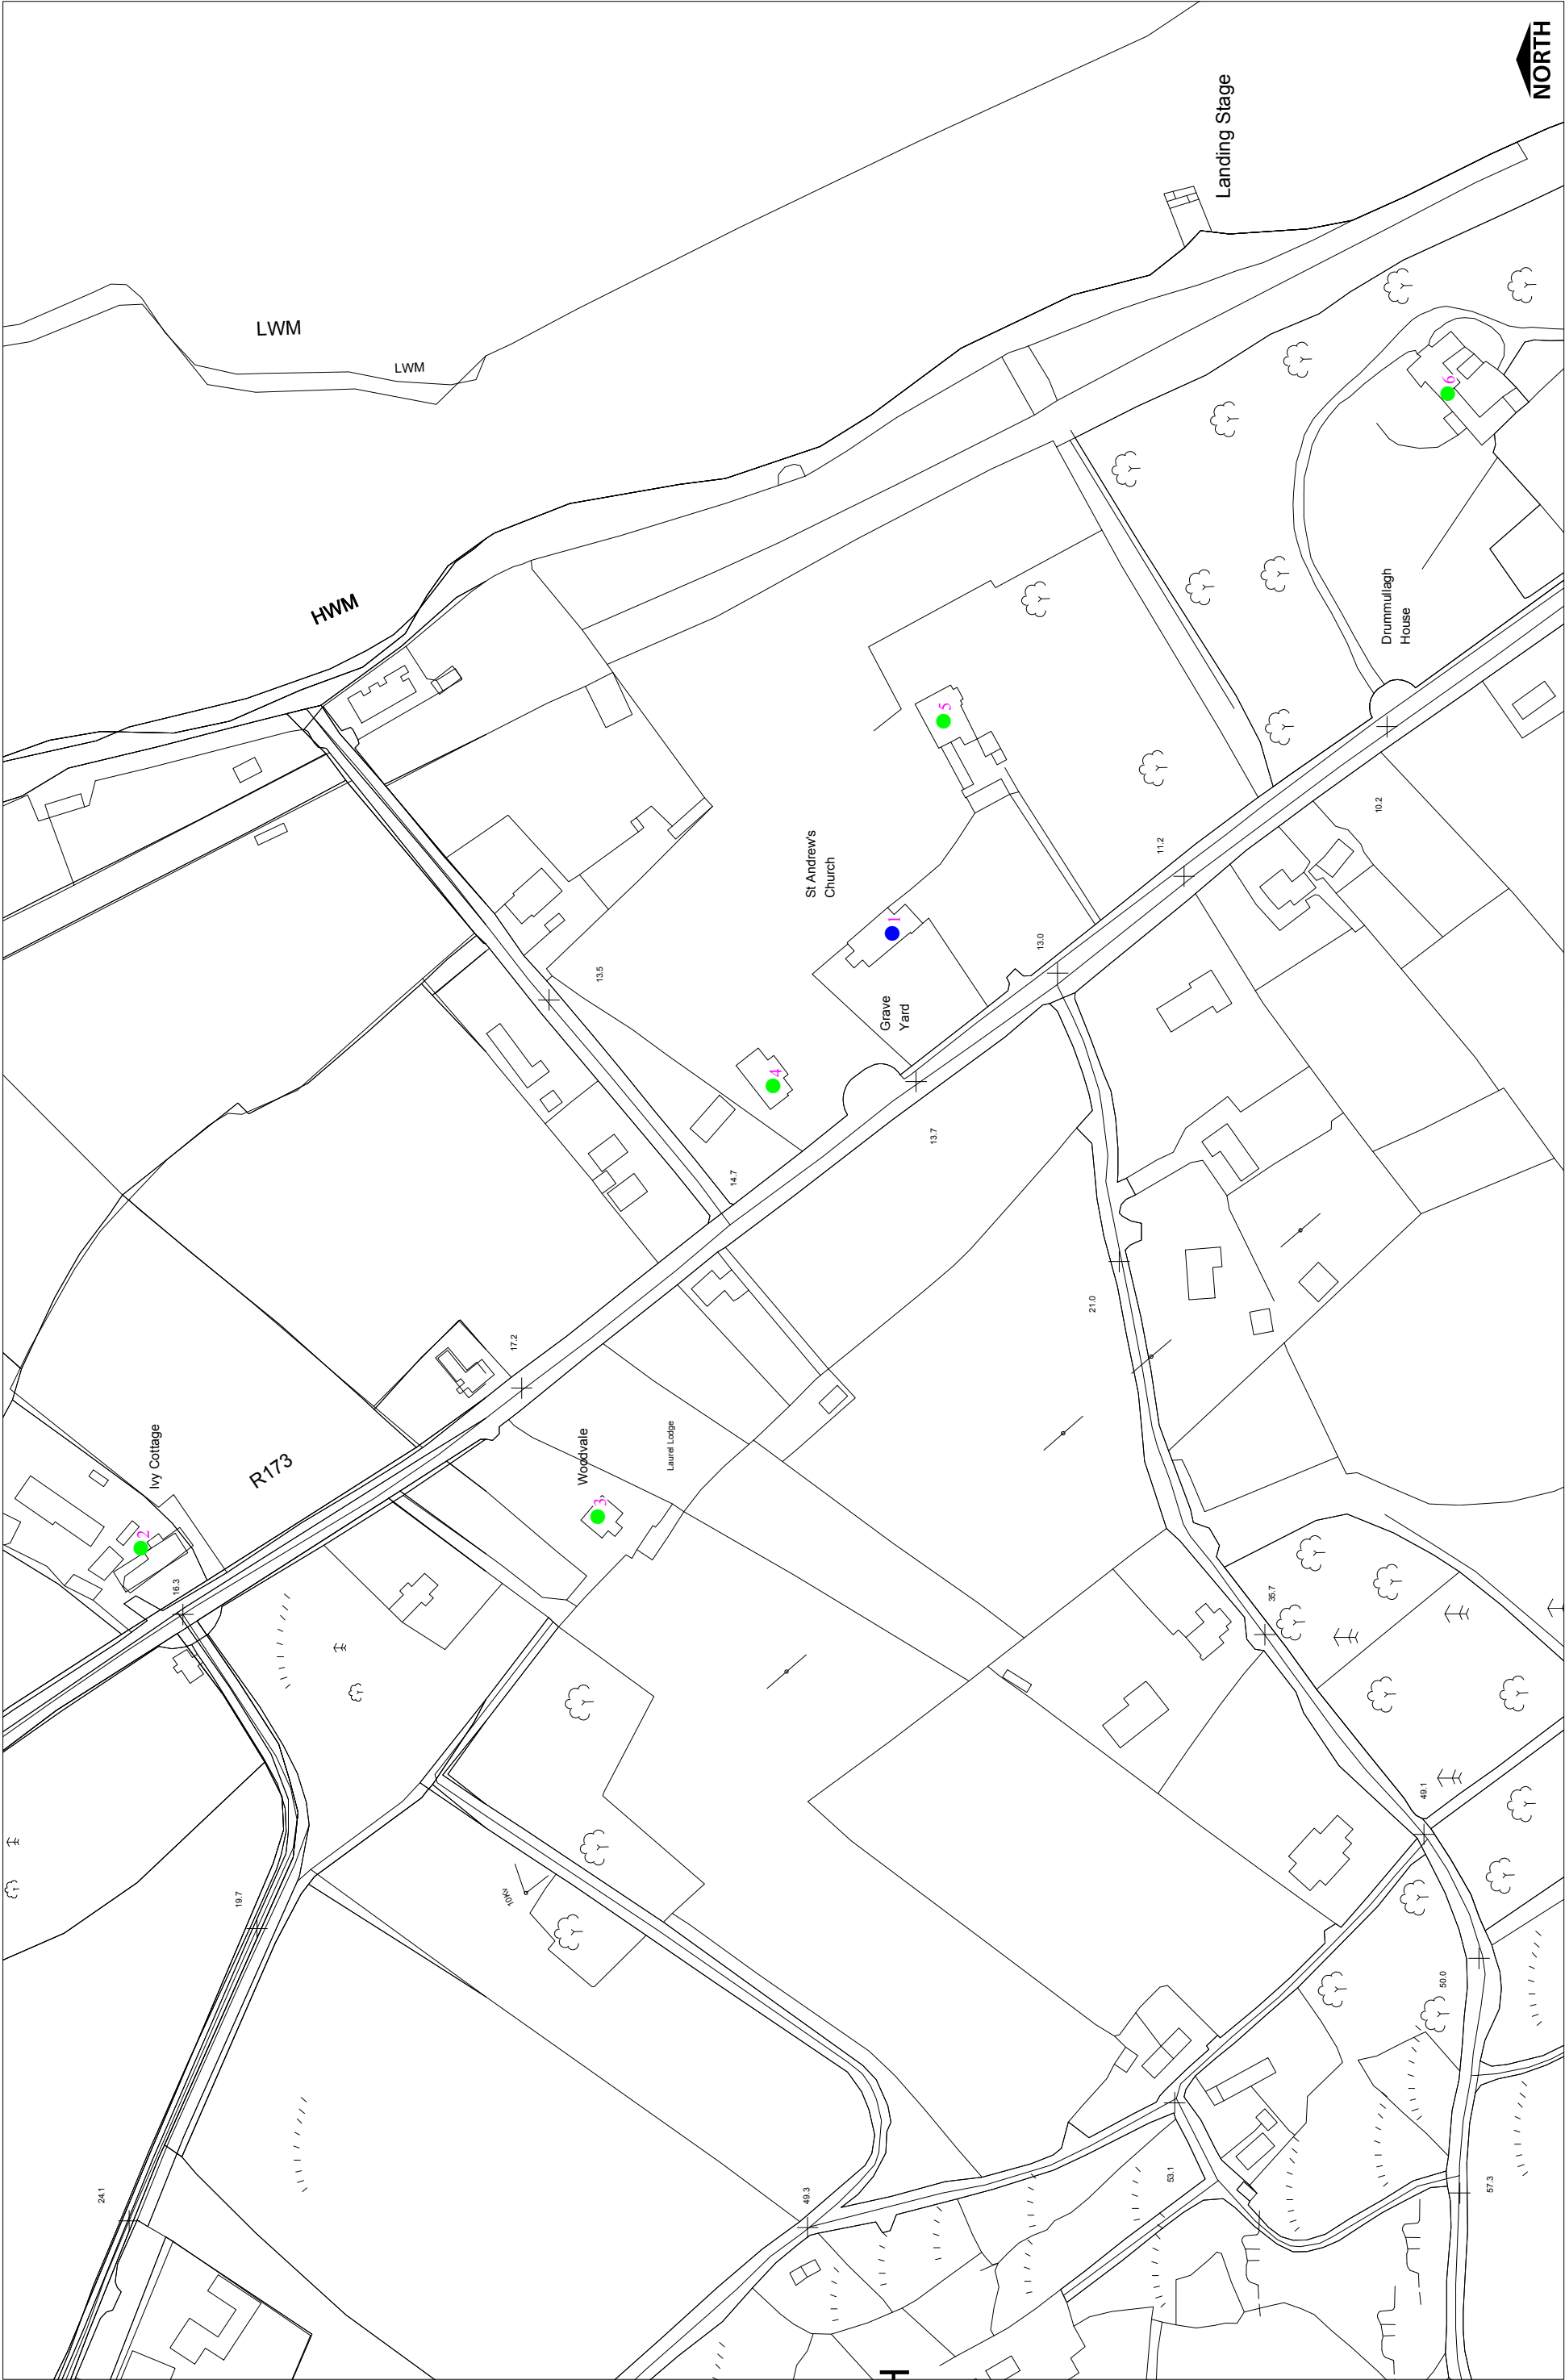

Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie

Note: Details shown on this map are for information purposes only.
Further details on any item should be clarified with Louth County Council.
The map has been produced by Louth County Council with available Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number 2009/00/CCLMA/LouthLocalAuthorities.

Louth County Council Record of Protected Structures Sheet No 2(a) Drum Mullagh



Protected Structure

Proposed Protected Structure

Proposed to be deleted from

Register of Protected Structures

All Protected Structures within
this boundary are in the
Dundalk & Environs Plan


Not to scale when printed A3 Landscape

Draft Louth County Development Plan 2009 - 2015.
Proposed Record of Protected Structures.

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Existing Protected Structure	Lhs002-001	2	Drummullagh	St Andrew's Church	Church	Freestanding former Church of Ireland church, dated 1838, Three-bay nave, three-stage pinnaced square tower centrally located at west end, single-bay chancel to east end with lean-to vestry projecting from south side.	13833004
Proposed Protected Structure	LHS002-002	2	Ivy Cottage, Drummullagh	Ivy Cottage	House	Detached four-bay single-storey with attic house, built c. 1830. Return with lean-to corrugated asbestos roof to rear (north), range of single-storey outbuildings to west with single-pitch profiled metal roof.	13833001
Proposed Protected Structure	LHS002-003	2	Woodvale, Drummullagh	Woodvale	House	Detached three-bay two-storey house, built c. 1870. Open porch with lean-to roof projecting from north (front) elevation, lower two-storey return to south (rear).	13833002
Proposed Protected Structure	LHS002-004	2	Saint Andrew's National School, Drummullagh	Saint Andrew's National School	School	Detached single-storey with attic school, built c. 1840, no longer in use. T-plan main block, lower wings set in south-east and south-west internal angles.	13833003
Proposed Protected Structure	LHS002-005	2	Omra Park, Drummullagh	Omra Park	House	Detached two-storey former rectory, built c. 1800, altered and extended c. 1860, now in use as private house. Hipped slate roofs with rendered chimneystacks. Rendered walls. Timber sliding sash windows.	13833005
Proposed Protected Structure	LHS002-006	2	Drummullagh House, Drummullagh	Drummullagh House	House	Detached three-bay single-storey over basement with attic house, built c. 1760. Main block rectangular-plan facing east, gabled glazed porch c. 1930 projecting from front east elevation, two-storey over basement return wing to north-west.	13833006
Proposed Protected Structure	LHS002-007	2	Beacon, Cornamucklagh	Beacon	Lighthouse	Freestanding light beacon, built c. 1880, one of a pair. Circular-plan, tapering shaft, conical roof. Ashlar granite roof, projecting eaves corbel string. Uncoursed rubble granite walling.	13900201
Proposed Protected Structure	LHS002-008	2	Lighthouse, Cornamucklagh	Lighthouse	Lighthouse	Freestanding light beacon, built c. 1880, one of a pair. Circular-plan, tapering shaft, conical roof. Ashlar granite roof, projecting eaves corbel string. Uncoursed rubble granite walling.	13900202
Proposed Protected Structure	LHS002-009	2	Cornamucklagh		House	Detached three-bay two-storey house, built c. 1920. Slightly projecting flat-roofed single-storey entrance porch flanked by full-height canted bay windows, single-storey pitched roof wing to east.	13900203

Draft Louth County Development Plan 2009 - 2015.
Proposed Record of Protected Structures.

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Existing Protected Structure	Lhs003-001	3	Roche	Roche Castle	Ruin	Pale frontier castle from 1230, triangular plan, walled enclosure with bastions, great hall, and gatehouse.	
Proposed Protected Structure	LHS003-002	3	Drumbilla		Kiln	Detached lime kiln, built c. 1860, now a ruin. Rectangular-plan, extended to north with additional kiln c. 1870, ramp to east.	13900301
Proposed Protected Structure	LHS003-003	3	Dungooly	Dungooly Bridge	Road Bridge	Double-span road-over-river stone bridge built c. 1830.	13900302
Proposed Protected Structure	LHS003-004	3	Dungooly	Dungooly Mill	Water Mill	Detached multiple-bay two-storey mill, built c. 1830, now disused.	13900303
Proposed Protected Structure	LHS003-005	3	Shortstone West		House	Detached three-bay two-storey house, built c. 1800. Rectangular-plan with return to west, single-storey flat-roofed addition to south-west angle c. 1950.	13900305
Proposed Protected Structure	LHS003-006	3	Slieve		House	Detached three-bay single-storey house, built c. 1800. Rectangular-plan, single-storey link to two-bay two-storey house c. 1950 to west with attached outbuildings and east and west farmyard.	13900306

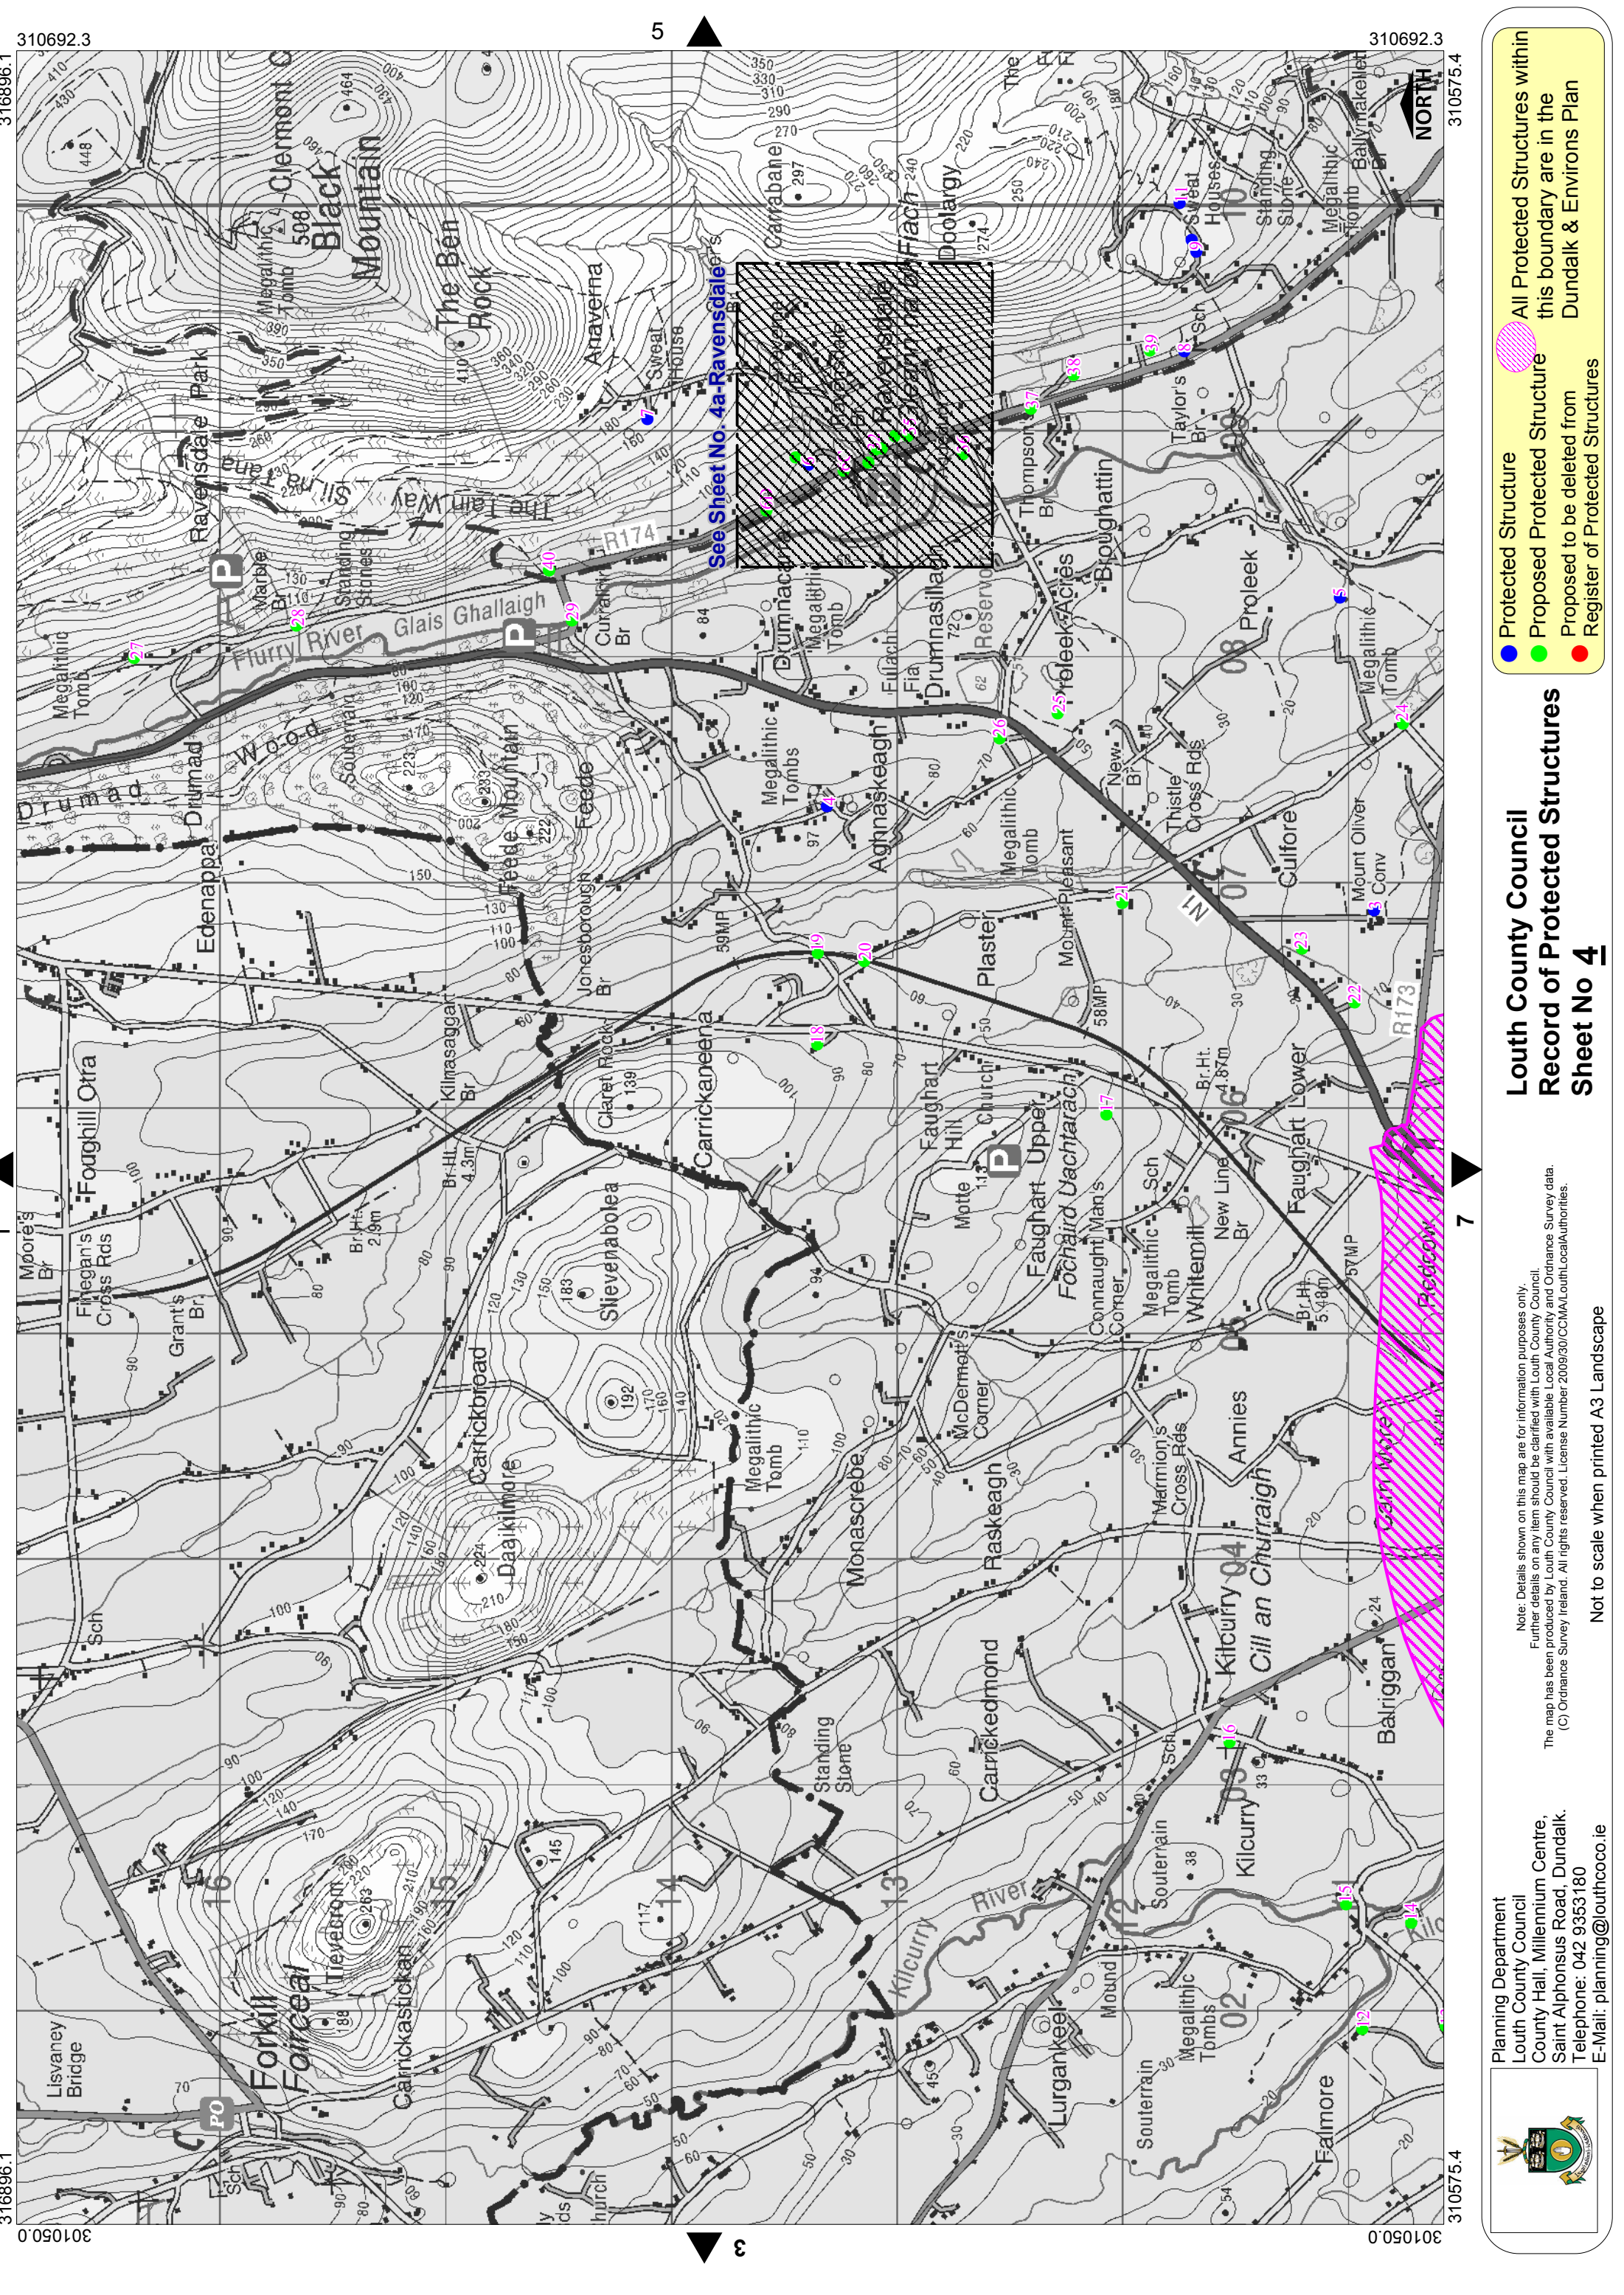


Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie

Note: Details shown on this map are for information purposes only.
Further details on any item should be clarified with Louth County Council.
The map has been produced by Louth County Council with available Local Authority and Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number 2009/30/CCMA/LouthLocalAuthorities.
Not to scale when printed A3 Landscape

Louth County Council Record of Protected Structures Sheet No 4

- Protected Structure
- Proposed Protected Structure
- Proposed to be deleted from Register of Protected Structures
- All Protected Structures within this boundary are in the Dundalk & Environs Plan

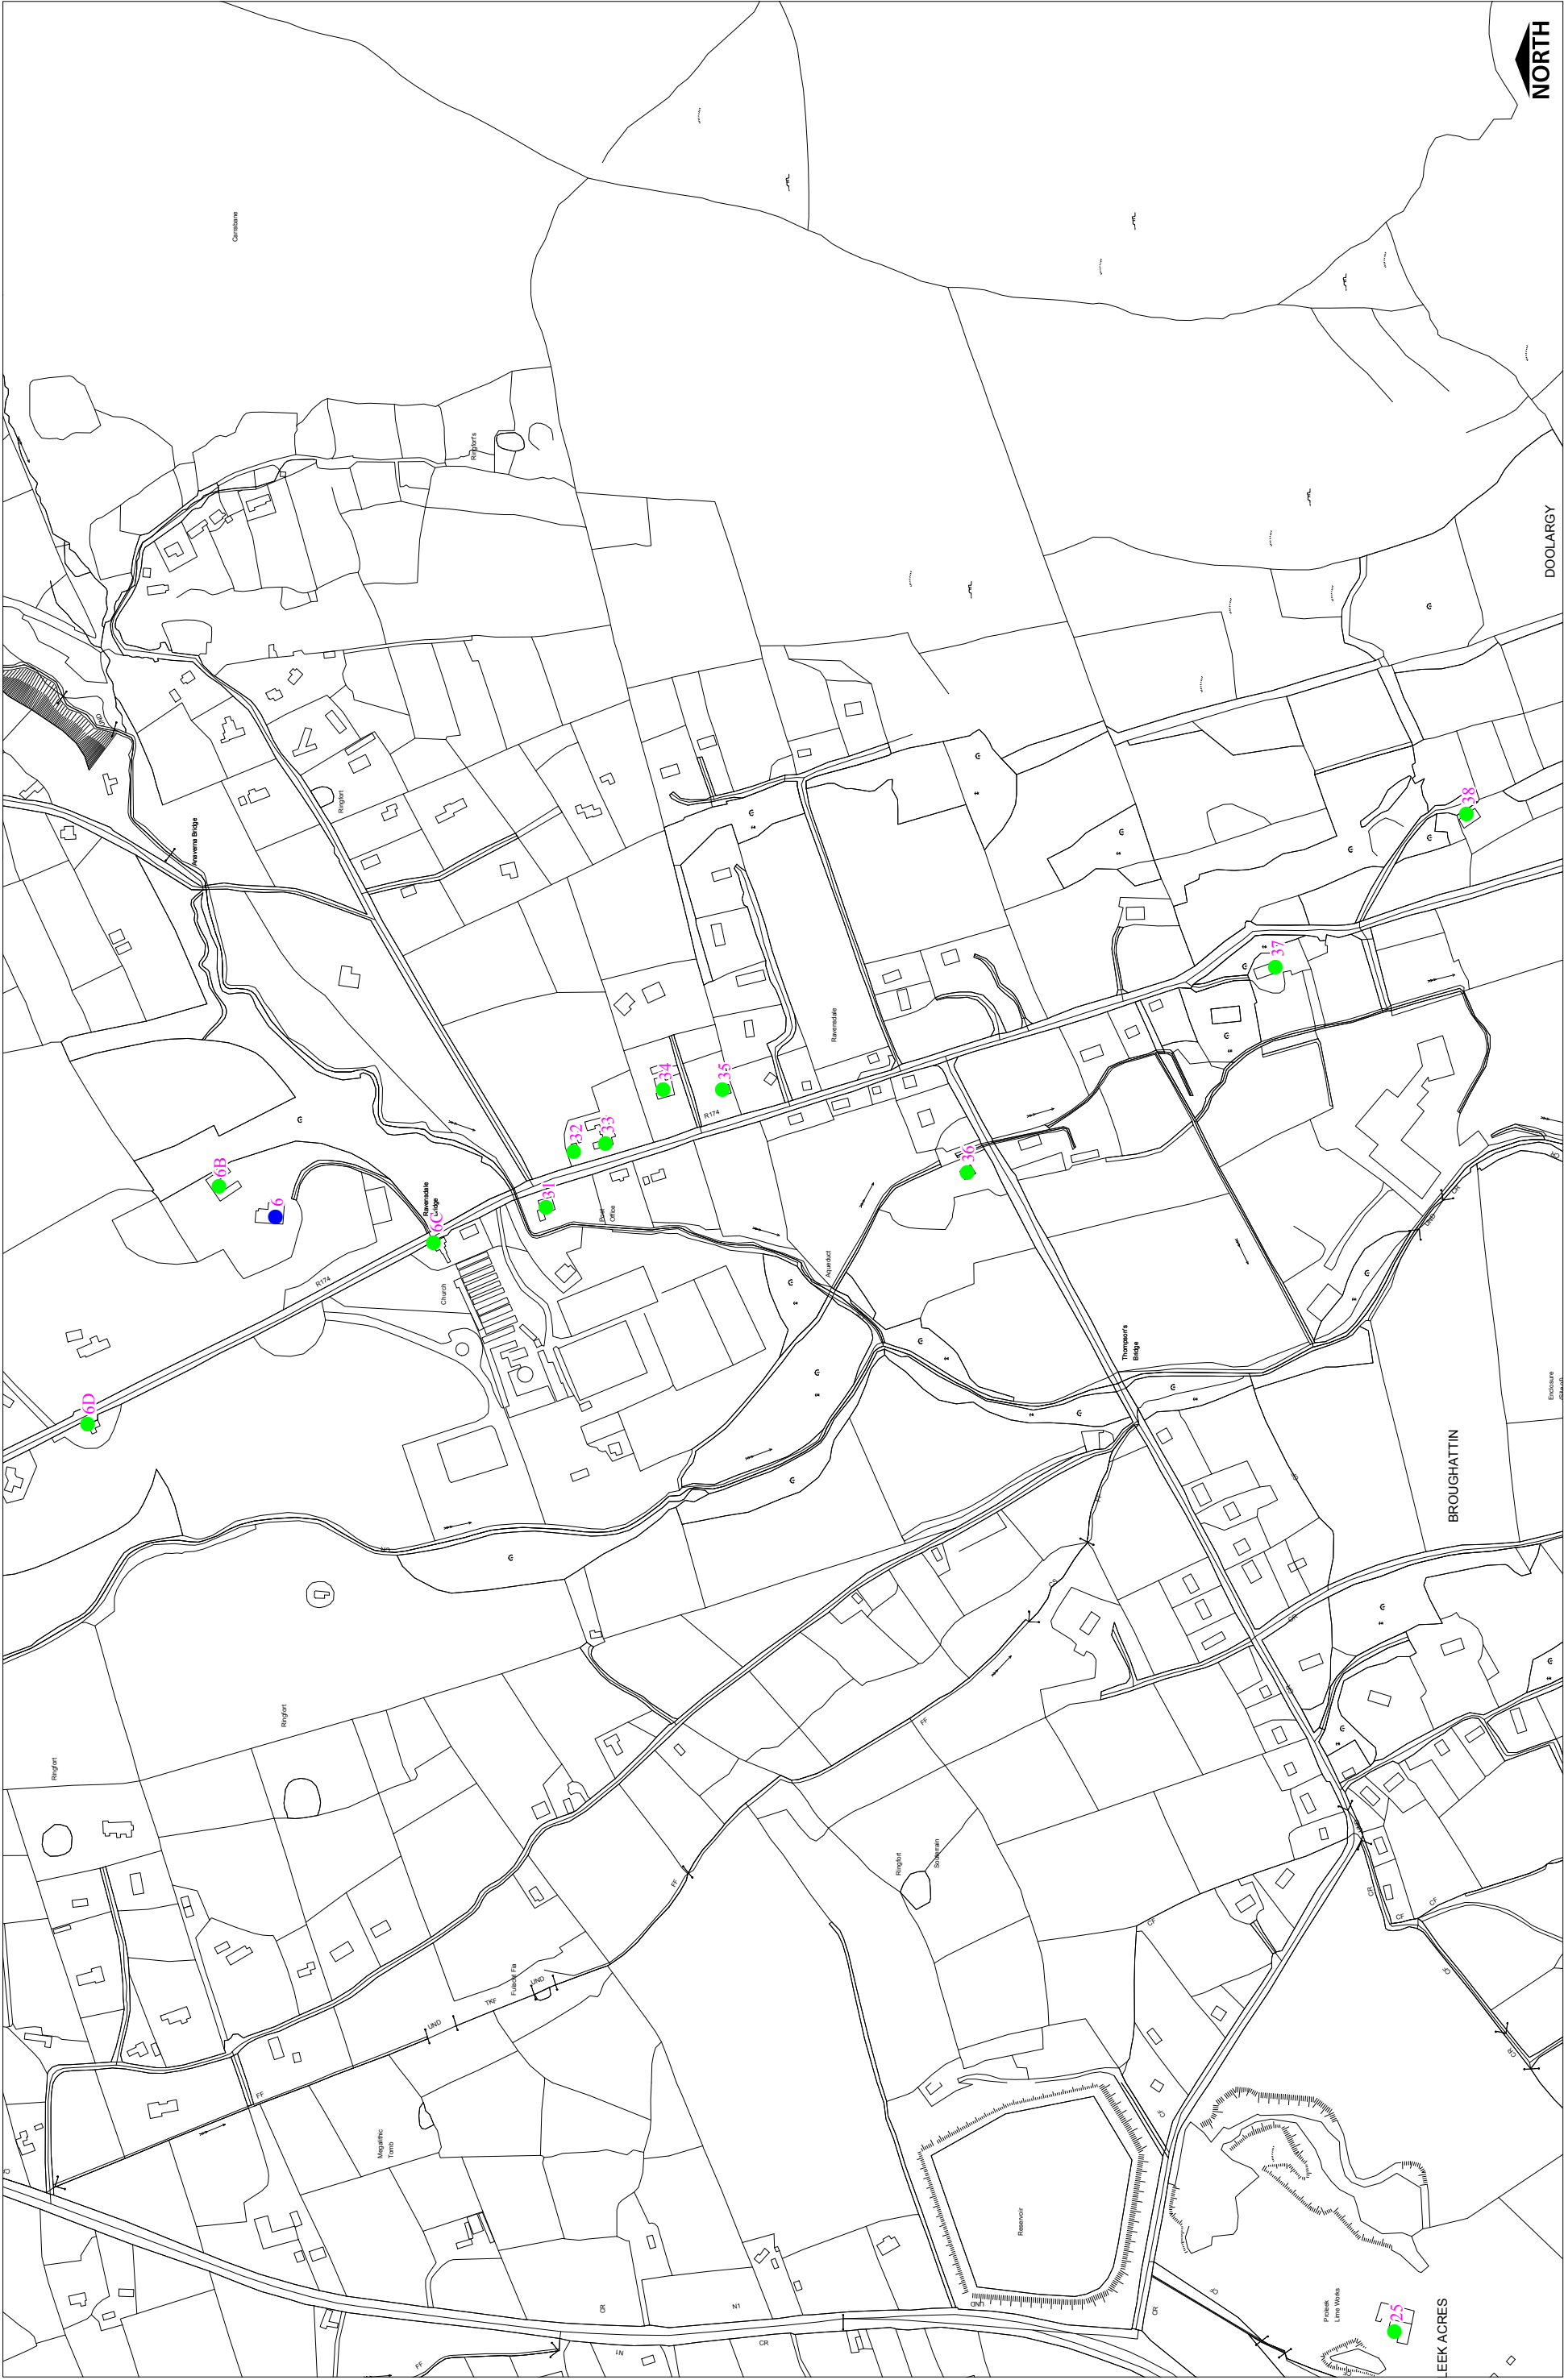

Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie



Note: Details shown on this map are for information purposes only.
Further details on any item should be clarified with Louth County Council.
The map has been produced by Louth County Council with available Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number 2009/00/CCLMA/LouthLocalAuthorities.

Louth County Council Record of Protected Structures Sheet No 4(a) Ravensdale

- Protected Structure
- Proposed Protected Structure
- Proposed to be deleted from Register of Protected Structures

All Protected Structures within this boundary are in the Dundalk & Environs Plan

Not to scale when printed A3 Landscape


Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Existing Protected Structure	Lhs004-002	4	Balregan	The Water Lodge	House	Detached three-bay two-storey over basement red brick house, built c. 1840. Square-plan. Originally the miller's house. Includes stable yards and remains of mill.	13900405
Existing Protected Structure	Lhs004-003	4	Aghaboy's	Mount Oliver	Convent/nunnery	Detached thirteen-bay single- and two-storey former country house by Sir John McNeill, built c. 1800, now in use as convent. Irregular plan, enlarged and remodelled c. 1850, two-storey central bay, pedimented entrance, flanked by single-storey balustraded bays, giant Corinthian portico & multiple ranges of extensions.	13900414
Existing Protected Structure	Lhs004-004	4	Aghnaskeagh	Aghnaskeagh Cairns	Cairn/portal tomb		
Existing Protected Structure	Lhs004-005	4	Proleek	Dolmen And Portal Tomb	Dolmen		
Existing Protected Structure	Lhs004-006	4	Anaverna	Anaverna House & Stables	House	c. 1790, by Thaddeus Gallagher, five-bay two-storey Georgian House, incl. Cast iron gates with Greek key pattern. Three ranges of multiple-bay two-storey stone former stable complex, now in private domestic and commercial use. U-plan surrounding cobbled yard.	13900423
Proposed Protected Structure	LHS004-006B	4	Anaverna	Anaverna Stables In The Curtilage Of Anavaerna Ho.	Stables	Three ranges of multiple-bay two-storey stone former stable complex, built c. 1790, now in private domestic and commercial use. U-plan surrounding cobbled yard, single-storey lean-to c. 1850 and glass conservatory to west, stone steps to first floor south within yard, bellcote to south.	13900423
Proposed Protected Structure	LHS004-006C	4	Anaverna Doolargy	Anaverna Gate Lodge	Gate Lodge	Detached three-bay single-storey former gate lodge, built c. 1840, now in private domestic use. Rectangular-plan, lean-to return and extension to west.	13900425
Proposed Protected Structure	LHS004-006D	4	Anaverna Ravensdale	Anavernagat Lodge	Gate Lodge	Detached two-bay single-storey former gate lodge, built c. 1850, now in private domestic use. Central gable-fronted porch to east elevation.	13900422
Existing Protected Structure	Lhs004-007	4	Anavernagh	Sweat House & Stone Corbelled Structures	Sweathouse		
Existing Protected Structure	Lhs004-008	4	Doolargy	St Mary's Catholic Church	Church	Freestanding Roman Catholic church, built c. 1840. T-plan, sacristy to east, cast-iron bellcote to north-east. Barn Church with pointed windows and pinnacles, incl boundary walls.	13900435
Existing Protected Structure	Lhs004-009	4	Doolargy	Sweat House & Stone Corbelled Structures	Sweathouse		
Existing Protected Structure	Lhs004-010	4	Doolargy	Sweat House & Stone Corbelled Structures	Sweathouse		
Existing Protected Structure	Lhs004-011	4	Doolargy	Sweat House & Stone Corbelled Structures	Sweathouse		
Proposed Protected Structure	LHS004-012	4	Falmore	Falmore Hall	Country House	Detached five-bay two-storey over basement house, built c. 1810. U-plan, full-height bow to south-west elevation, two-storey late eighteenth century former house, now wing, to north-west.	13900401

Draft Louth County Development Plan 2009 - 2015.
Record of Protected Structures.

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Proposed Protected Structure	LHS004-013	4	Calwood House, Balregan	Calwood House	House	Detached three-bay two-storey former parochial house, built c. 1880, now in private domestic use. Rectangular-plan, canted bay to west, pitched and hipped roofed returns to east and north-east, recent extension to north and conservatory to south-east.	13900402
Proposed Protected Structure	LHS004-014	4	Balregan House, Balregan	Balregan House	House	Detached three-bay single-storey over basement with attic former miller's house, built c. 1760, now in use as private house. T-plan, half-dormer to east elevation.	13900403
Proposed Protected Structure	LHS004-015	4	Millbrook House, Balregan	Millbrook House	House	Detached three-bay two-storey house, built c. 1840. Rectangular-plan, lean-to return and extension to north c. 1960, porch to south	13900404
Proposed Protected Structure	LHS004-016	4	Saint Brigid's Roman Catholic Church, Kilcurry	Saint Brigid's Roman Catholic Church	Church	Freestanding Roman Catholic church, dated 1896. Cruciform-plan, shallow transepts to east and west, apse to south, three-stage tower between east transept and nave, sacristy to south-east.	13900406
Proposed Protected Structure	LHS004-017	4	Woodlawn, Faughart Upper	Woodlawn	House	Detached three-bay two-storey house, built c. 1870, now ruinous.	13900407
Proposed Protected Structure	LHS004-018	4	Claret Rock House, Carrickaneena	Claret Rock House	House	Detached three-bay two-storey house, built c. 1850, incorporating. Square-plan, pedimented breakfront and open porch to east elevation, two two-storey returns to west, bow window to south.	13900408
Proposed Protected Structure	LHS004-019	4	Plaster		Railway Bridge	Single-arched stone road-over-rail bridge, built c. 1880.	13900409
Proposed Protected Structure	LHS004-020	4	Plaster		Railway Bridge	Single-arch stone road-over-railway bridge, built c. 1880.	13900410
Proposed Protected Structure	LHS004-021	4	Thistle House, Plaster	Thistle House	House	Detached seven-bay two-storey house, built c. 1760, formerly five-bay, extended by two-bays to west. Formerly T-plan, returns and extension to north and east elevations, gable-fronted porch to south elevation.	13900411
Proposed Protected Structure	LHS004-022	4	Mount St.Frances, Aghaboys	Mount St. Frances	House	Detached three-bay two-storey house, built c. 1870. Square-plan, porch to west, single-storey extension to north.	13900412
Proposed Protected Structure	LHS004-023	4	Mount Pleasant Lime Works, Aghaboys	Mount Pleasant Lime Works	Kiln	Detached former lime kiln, built c. 1830, no longer in use. Irregular plan. Random rubble uncoursed stone walling. Triple arches, red brick surrounds, to west elevation for lime production; square-headed window and door openings to north elevation with red brick surrounds.	13900413
Proposed Protected Structure	LHS004-024	4	Ballymascanlon		Gate Lodge	Detached three-bay single-storey with attic former gate lodge, built c. 1820, now in private domestic use. Rectangular-plan, two-bay two-storey flat-roofed extension to east.	13900416
Proposed Protected Structure	LHS004-025	4	Proleek Acres	Proleek Lime Works	Kiln	Detached stone former lime kiln, dated 1848. Irregular plan. Squared-and-snecked stone walling, crenellated parapet, bellcote to west, red brick dressings. Segmental-headed door openings to east, red brick arch; round-headed kiln opening to west elevation, date plaque reading "1848", inscriptions illegible. Lime works situated in open field.	13900417

Draft Louth County Development Plan 2009 - 2015.
Record of Protected Structures.

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Proposed Protected Structure	LHS004-026	4	Aghnaskeagh House, Aghnaskeagh	Aghnaskeagh House	House	Detached two-storey house, built c. 1840.	13900418
Proposed Protected Structure	LHS004-027	4	Ravensdale House, Ravensdale Park	Ravensdale House	Stables	Detached former stables, built c. 1830, now in private domestic use.	13900419
Proposed Protected Structure	LHS004-028	4	Marble Bridge, Ravensdale Park	Marble Bridge	Road Bridge	Single-arch road-over-river bridge, built c. 1790.	13900420
Proposed Protected Structure	LHS004-029	4	Curralhir Bridge, Ravensdale Park	Curralhir Bridge	Road Bridge	Double-arch road-over-river bridge, built c. 1780.	13900421
Proposed Protected Structure	LHS004-031	4	Sruhan house, Doolargy	Sruhan House	House	Detached three-bay two-storey over basement house, built c. 1870. Cantled bay to east elevation, half-dormers to south elevation, projecting timber sheeted bay to attic storey c. 1970 and integral carriage arch to west elevation.	13900426
Proposed Protected Structure	LHS004-032	4	Doolargy	Court House	Court House	Detached gable-fronted single-bay two-storey court house, built c. 1850, no longer in use. Rectangular-plan.	13900427
Proposed Protected Structure	LHS004-033	4	Doolargy	Leanamore House	House	Detached three-bay two-storey house, built c. 1860. L-plan, returns to east, single-storey extension to north.	13900428
Proposed Protected Structure	LHS004-034	4	Caraban House, Doolargy	Caraban House	House	Detached three-bay two-storey with attic house, built c. 1845. Half-dormer to west, crenellated entrance porch to west, cantled bay windows to north and south, extension to east, c. 2005.	13900429
Proposed Protected Structure	LHS004-035	4	Ravensdale National School, Doolargy	Ravensdale National School	School	Detached three-bay two-storey with attic former school, built c. 1850, now in domestic use. Double-pile, porch to west, extension to east.	13900430
Proposed Protected Structure	LHS004-036	4	Ravensdale House, Doolargy	Ravensdale House	Country House	Detached three-bay two-storey with attic house, built c. 1770. Return and lean-to addition to east.	13900431
Proposed Protected Structure	LHS004-037	4	Doolargy Cottage, Doolargy	Doolargy Cottage	House	Detached six-bay two-storey over basement house, built c. 1780. L-plan, lean-to extension to east c. 1950, porch to south c. 1950.	13900432
Proposed Protected Structure	LHS004-038	4	Doolargy House, Doolargy	Doolargy House	House	Detached double-pile three-bay two-storey over basement house, built c. 1780. Rectangular-plan, two-storey cantled bay to north elevation, single-storey extension to east c. 1900.	13900433
Proposed Protected Structure	LHS004-039	4	Ravensdale Parochial house, Doolargy	Ravensdale Parochial House	Parochial House	Detached three-bay two-storey parochial house, built c. 1880. Rectangular-plan, single-bay breakfronts to south and west elevations, porch to west elevation, extension c. 1900 to east.	13900434
Proposed Protected Structure	LHS004-040	4	Gate Lodge - Ravensdale Park	Gate Lodge Ravensdale Park	Gate Lodge	Three bay single storey Gate Lodge associated with Ravensdale Park House.	

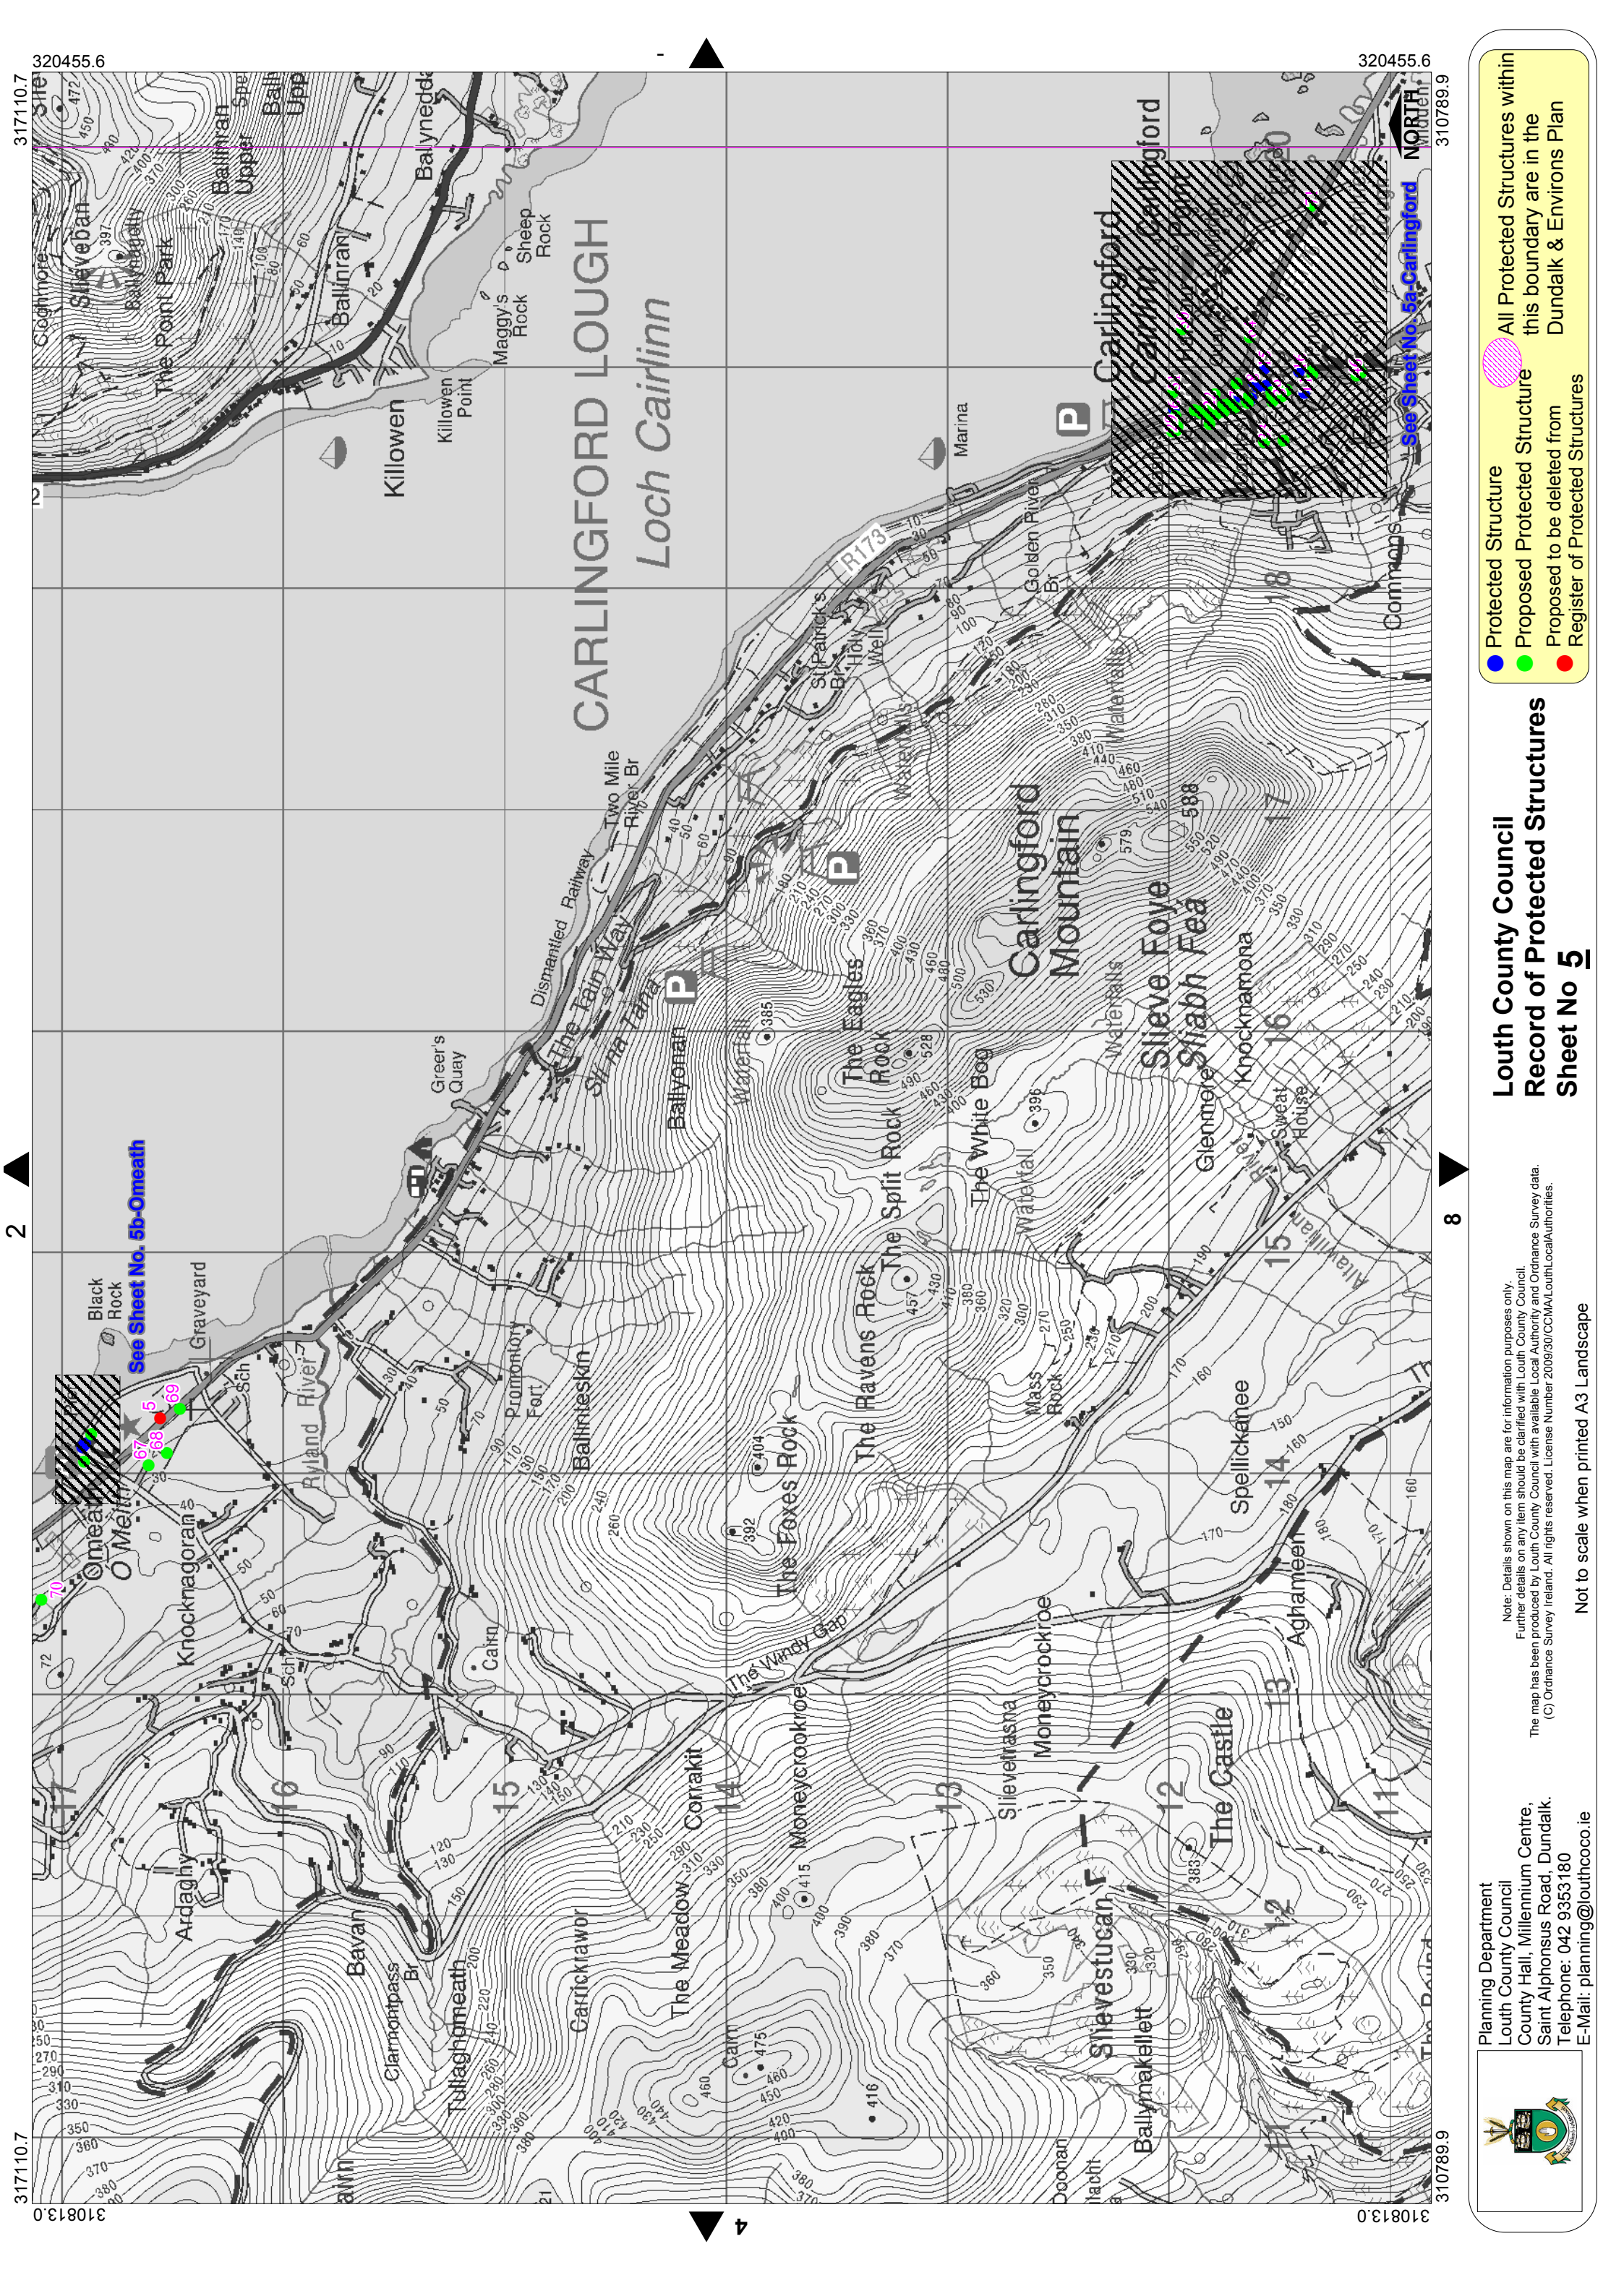


Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie

Note: Details shown on this map are for information purposes only.
Further details on any item should be clarified with Louth County Council.
The map has been produced by Louth County Council with available Local Authority and Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number 2009/30/CCMA/LouthLocalAuthorities.
Not to scale when printed A3 Landscape

Louth County Council Record of Protected Structures Sheet No 5

- Protected Structure
- Proposed Protected Structure
- Proposed to be deleted from Register of Protected Structures
- All Protected Structures within this boundary are in the Dundalk & Environs Plan

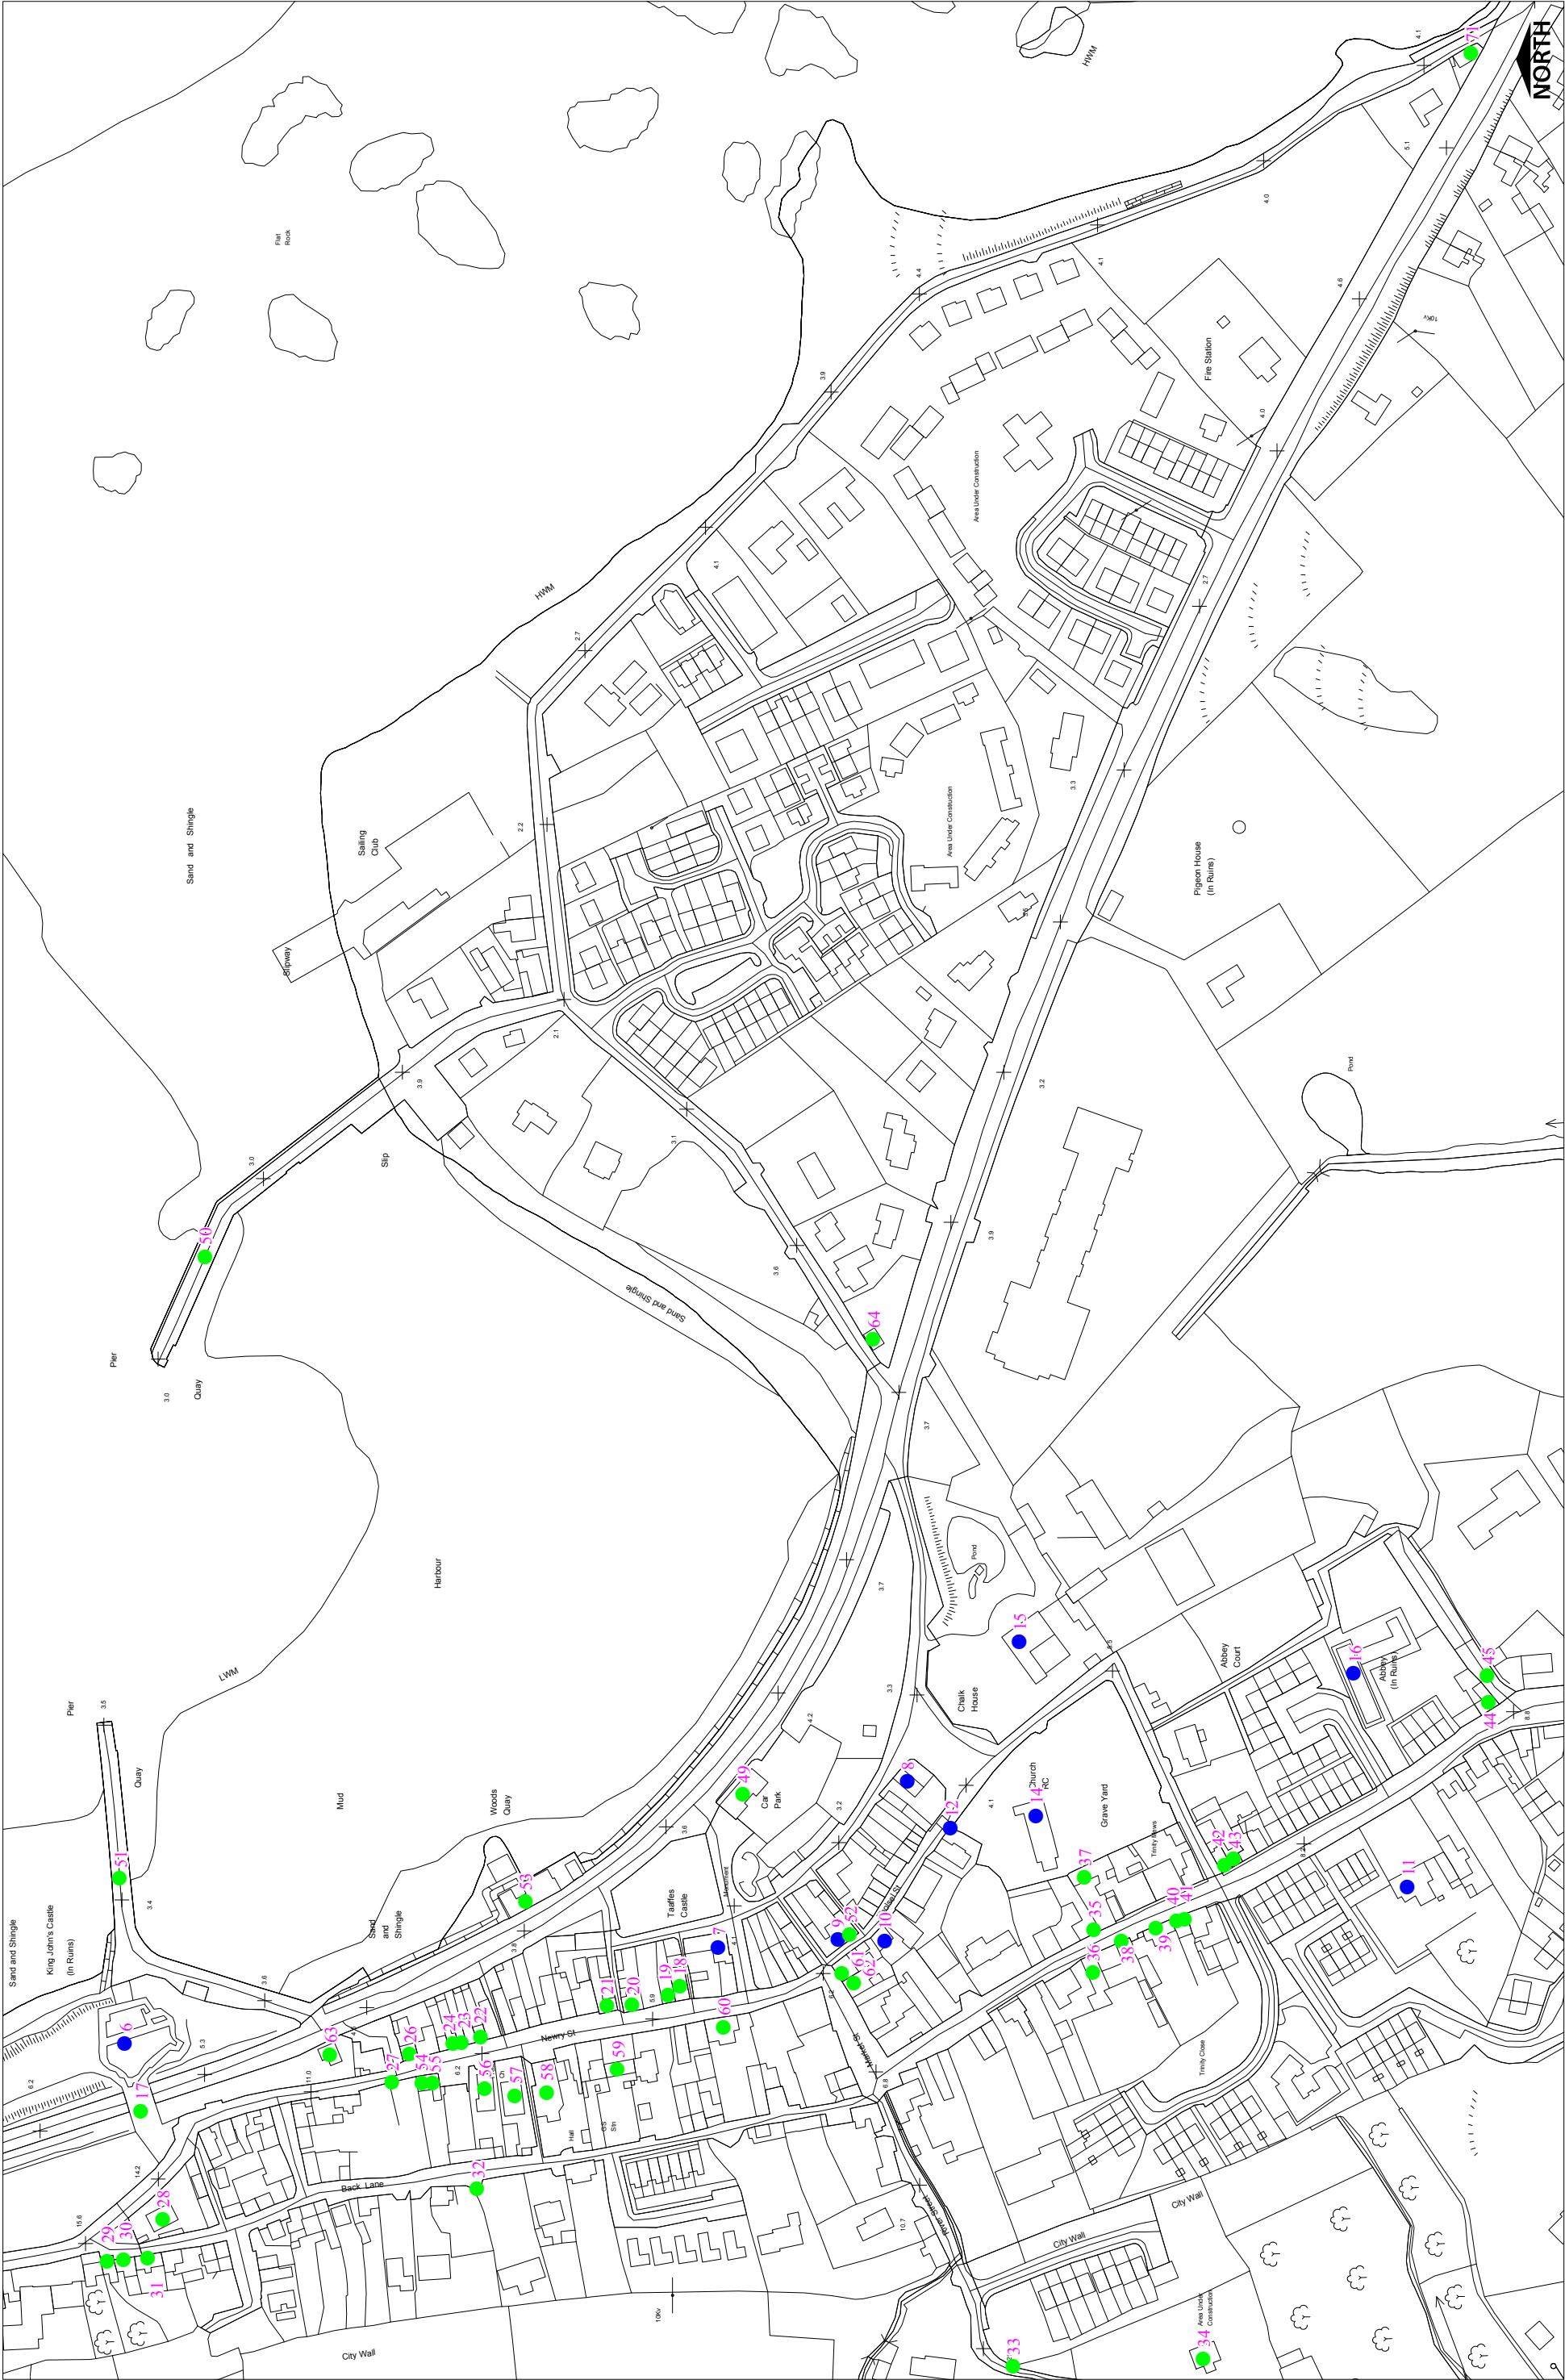

Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie

Note: Details shown on this map are for information purposes only.
Further details on any item should be identified with Louth County Council.
The map has been produced by Louth County Council with available Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number 2009/00/CCLMA/LouthLocalAuthorities.

Not to scale when printed A3 Landscape

Louth County Council Record of Protected Structures Sheet No 5(a) Carlingford

Protected Structure



Proposed Protected Structure




Proposed to be deleted from



Register of Protected Structures



All Protected Structures within
this boundary are in the
Dundalk & Environs Plan

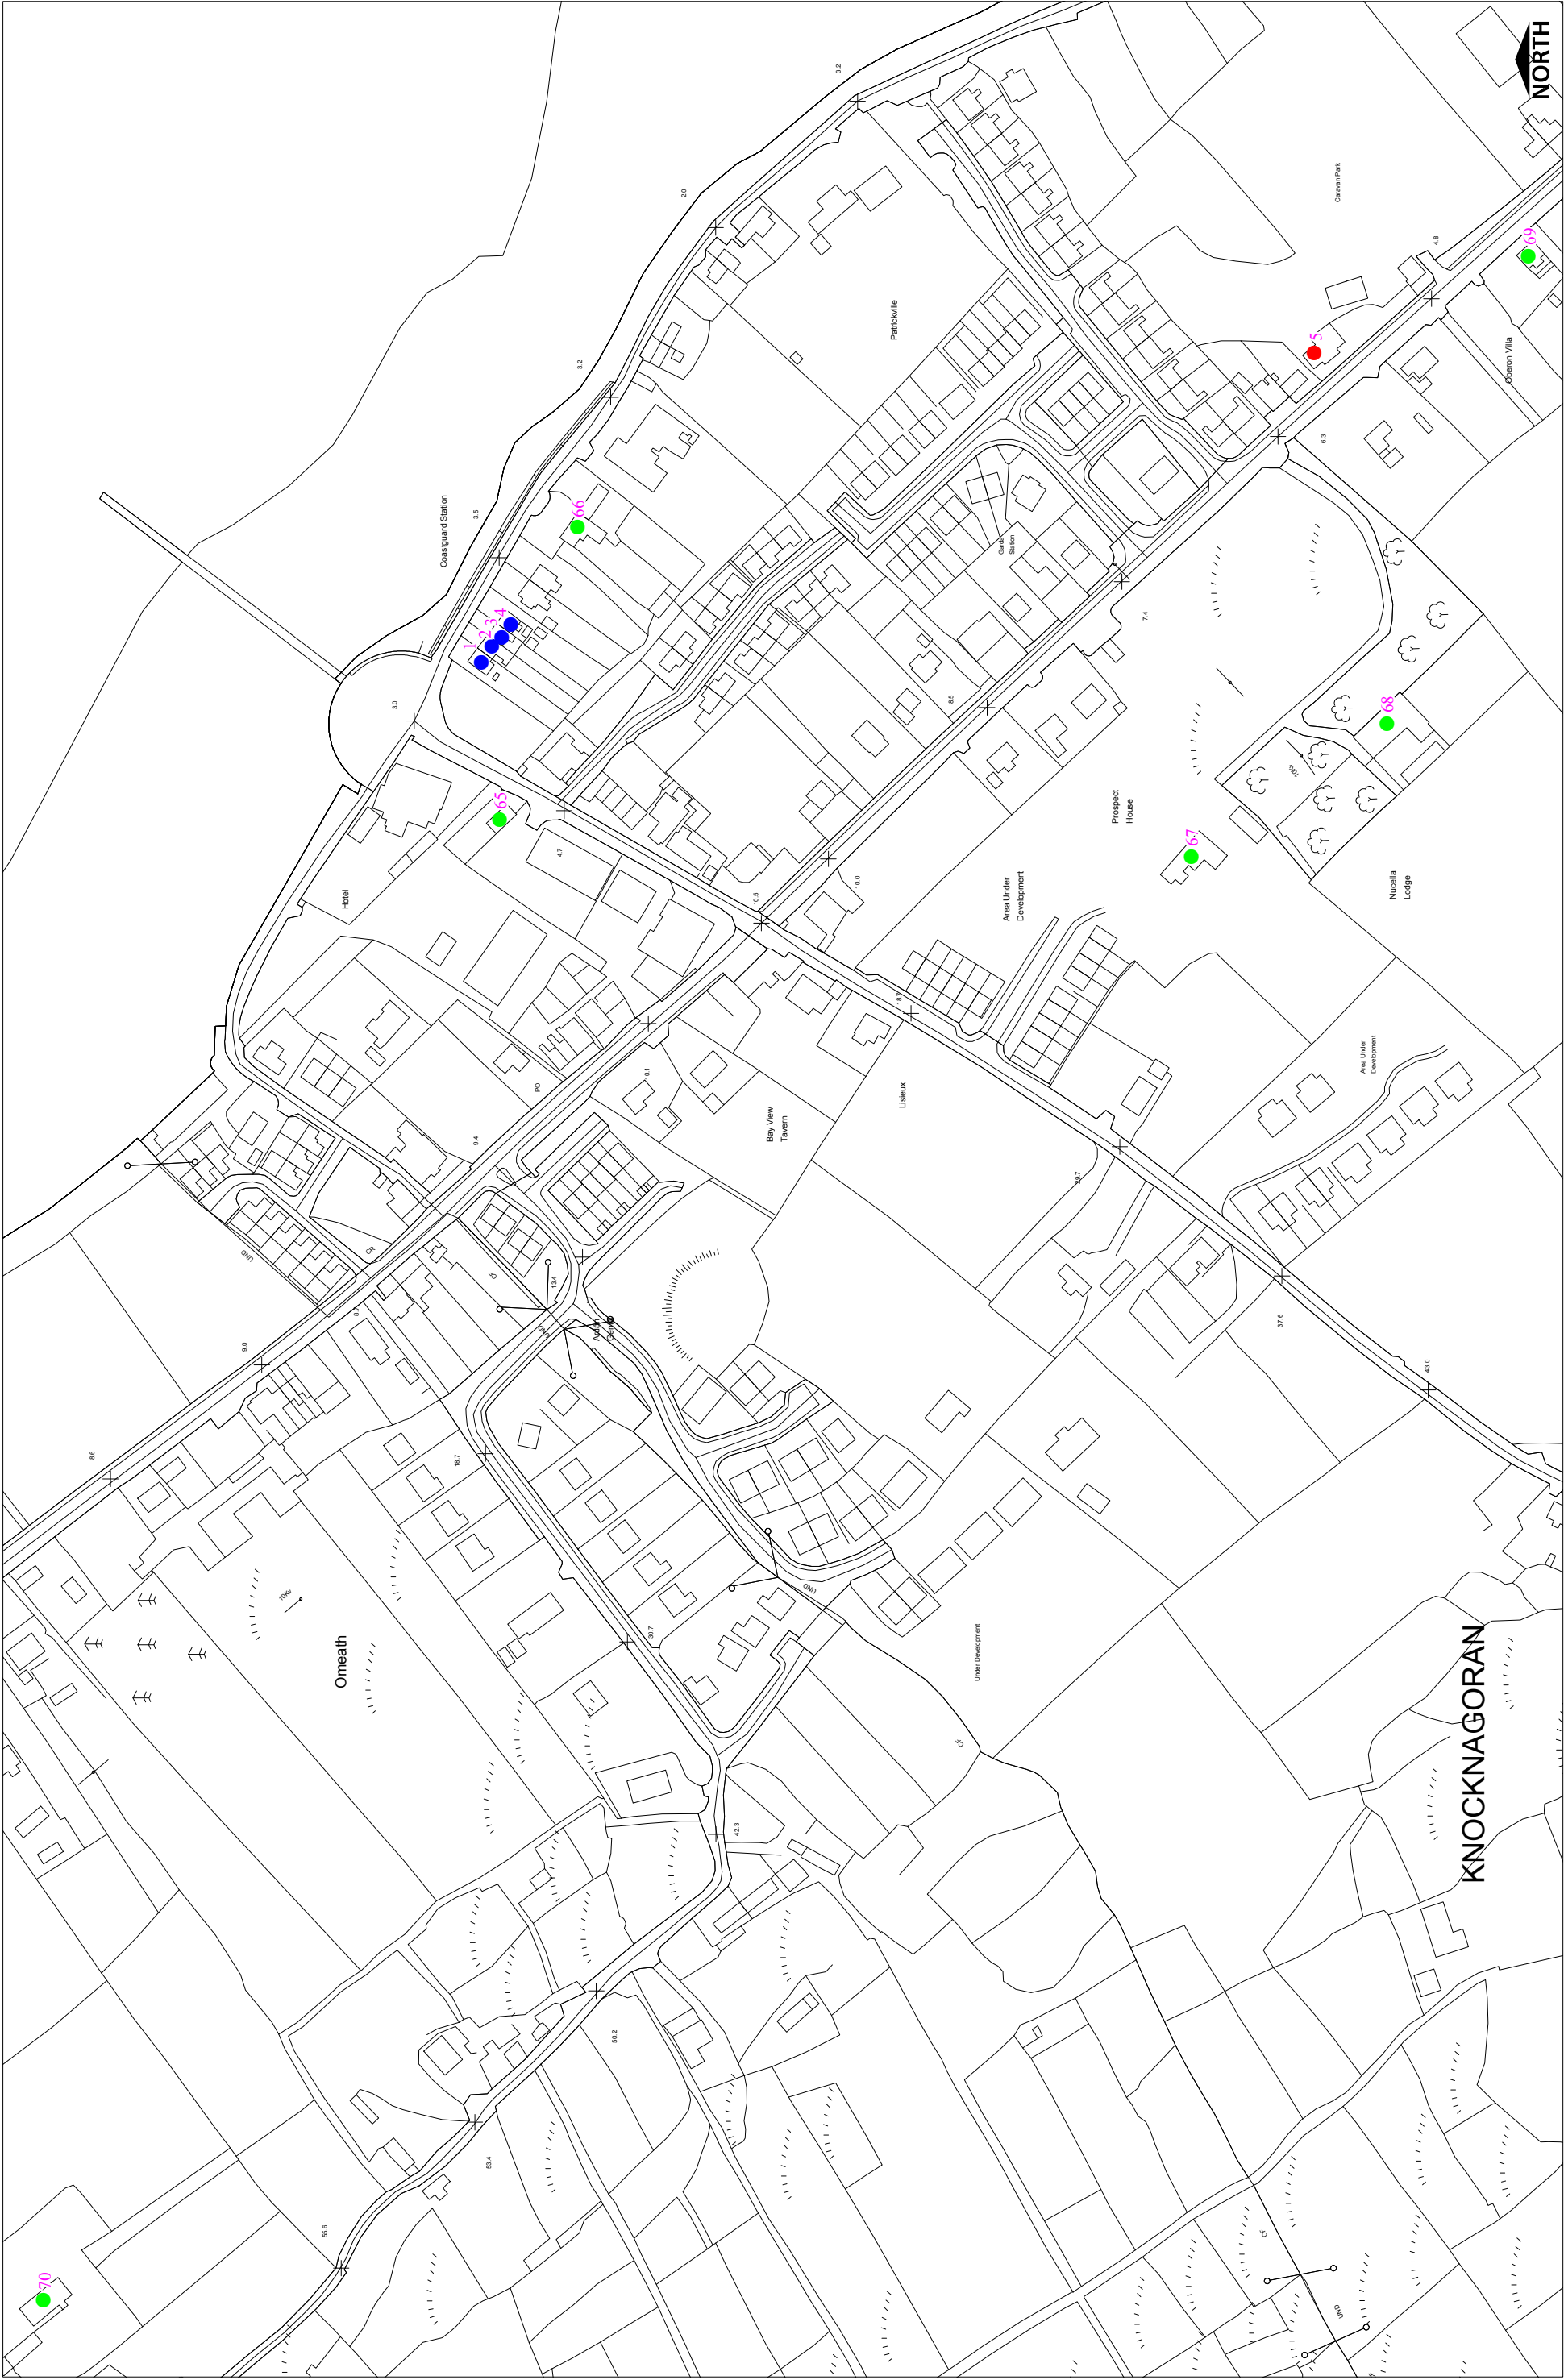

Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie



Note: Details shown on this map are for information purposes only.
Further details on any item should be clarified with Louth County Council.
The map has been produced by Louth County Council with available Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number 2009/00/CCLMA/LouthLocalAuthorities.
Not to scale when printed A3 Landscape

Louth County Council Record of Protected Structures Sheet No 5(b) Omeath

- Protected Structure
- Proposed Protected Structure
- Proposed to be deleted from Register of Protected Structures

All Protected Structures within this boundary are in the Dundalk & Environs Plan

Draft Louth County Development Plan 2009 - 2015.
Record of Protected Structures.

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Existing Protected Structure	Lhs005-001	5	Shore Road , Knocknagoran	Shore Road, 1	House	Terrace of four two-bay two-storey former coastguard houses, built c. 1800, with senior coastguard's house at east end, now in private domestic use.	13833008
Existing Protected Structure	Lhs005-002	5	Shore Road , Knocknagoran	Shore Road, 2	House	Terrace of four two-bay two-storey former coastguard houses, built c. 1800, with senior coastguard's house at east end, now in private domestic use.	13833008
Existing Protected Structure	Lhs005-003	5	Shore Road , Knocknagoran	Shore Road, 3	House	Terrace of four two-bay two-storey former coastguard houses, built c. 1800, with senior coastguard's house at east end, now in private domestic use.	13833008
Existing Protected Structure	Lhs005-004	5	Shore Road , Knocknagoran	Shore Road, 4	House	Terrace of four two-bay two-storey former coastguard houses, built c. 1800, with senior coastguard's house at east end, now in private domestic use.	13833008
Proposed To Be Deleted	Lhs005-005	5	Knocknagoran	St Laurence's Hall	Community Centre	Single storey, multiple bay hall.	
Existing Protected Structure	Lhs005-006	5	Liberties of Carlingford	King John's Castle	Castle	c.1210, D-shaped plan, with open courtyard and tall square tower.	
Existing Protected Structure	Lhs005-007	5	Liberties of Carlingford	Taafe's Castle	Towerhouse	late C16, rectangular tower house, with overhanging battlemented parapet and sw stair turret.	
Existing Protected Structure	Lhs005-008	5	Liberties of Carlingford	Former Thatched House	House	Detached five-bay two-storey house, built c. 1770. Rectangular-plan, open gabled porch projecting from south elevation. OPW site 02.	13825041
Existing Protected Structure	Lhs005-009	5	Liberties of Carlingford	H O'hare / Anchor Bar	Public House	Corner-sited attached two-bay two-storey house, built c. 1830, formerly also in use as shop, now in use as licenced premises with shopfront. Rectangular-plan, two-storey return to east, attached to house to south.	13825047
Existing Protected Structure	Lhs005-010	5	Tholsel Street, Liberties of Carlingford	The Mint	Towerhouse	C16 fortified tower house, three-storey with ogee-headed lancet windows and medieval head above the entrance.	
Existing Protected Structure	Lhs005-011	5	Liberties of Carlingford	Carlingford House, Abbeyview	House	Detached three-bay two-storey house, built c. 1800, later used as dispensary, now in use as house. Rectangular-plan, extended by three-bays to north c. 1900, returns to west.	13825033
Existing Protected Structure	Lhs005-012	5	Tholsel Street, Liberties of Carlingford	The Tholsel	Gates (Town/city)	Detached single-bay two-storey former gate house and tholsel with integral carriage arch and small chamber adjacent, built c. 1450, extensively repaired in the nineteenth century. Only surviving town gate in Carlingford.	13825045
Existing Protected Structure	Lhs005-014	5	Liberties of Carlingford	Holy Trinity Heritage Centre	Heritage Centre	Former Church of Ireland, Freestanding former Church of Ireland church, Medieval tower with later nave (1821) incorporating fabric of earlier building and now used as heritage centre.	13825040
Existing Protected Structure	Lhs005-015	5	Liberties of Carlingford	Ghan House	House	Early 19thC rebuilding of 1727 detached seven-bay two-storey house, gabled. now in use as guest house and restaurant. L-plan comprising double-pile east block with returning single-pile six-bay single-storey over basement north block.	13825002
Existing Protected Structure	Lhs005-016	5	Liberties of Carlingford	Dominican Friary	Ruin	remains of Friars Church with rectangular belfry.	
Proposed Protected Structure	LHS005-017	5	Liberties of Carlingford		Railway Bridge	Single-arch former railway bridge over former railway line, built 1872, now in use as pedestrian bridge over road. Bridge spans road and carries approach to King John's Castle.	13825001

Draft Louth County Development Plan 2009 - 2015.
Record of Protected Structures.

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Proposed Protected Structure	LHS005-018	5	Newry Street, Liberties of Carlingford		House	Semi-detached two-bay two-storey house, built c. 1870. Square-plan, attached house to north.	13825003
Proposed Protected Structure	LHS005-019	5	Newry Street, Liberties of Carlingford	Allure Hair Studio	House	Semi-detached two-bay two-storey house, built c. 1870, now also in use as hairdresser's to ground floor. Square-plan with return to east, attached house to south.	13825004
Proposed Protected Structure	LHS005-020	5	Newry Street, Liberties of Carlingford	Marian House	House	Detached three-bay two-storey house, built c. 1920. Rectangular-plan, return to east.	13825005
Proposed Protected Structure	LHS005-021	5	Newry Street, Liberties of Carlingford		House	Attached three-bay three-storey house, built c. 1880. Rectangular-plan, lean-to return to east.	13825006
Proposed Protected Structure	LHS005-022	5	Newry Street, Liberties of Carlingford		House	Terraced two-bay two-storey house, built c. 1870, as a terrace with the adjoining houses to the north. Rectangular-plan, single-storey return to east.	13825008
Proposed Protected Structure	LHS005-023	5	Newry Street, Liberties of Carlingford		House	Terraced two-bay two-storey house, built c. 1870, as a terrace with the adjoining houses to the north and south. Rectangular-plan, two-storey extension to east.	13825009
Proposed Protected Structure	LHS005-024	5	Newry Street, Liberties of Carlingford		House	Terraced two-bay two-storey house, built c. 1870, as a terrace with the adjoining houses to the north and south. Rectangular-plan, flat-roofed return to east.	13825010
Proposed Protected Structure	LHS005-026	5	Newry Street, Liberties of Carlingford	Ceol-na-mara	House	Corner-sited attached three-bay two-storey house, built c. 1920. Rectangular-plan, single-storey lean-to return to east	13825012
Proposed Protected Structure	LHS005-027	5	Newry Street, Liberties of Carlingford		Well	Well, built c. 1860, now disused. Segmental-headed opening, cut limestone trough, painted lead spout. Set in lime-washed random coursed wall to side of street.	13825013
Proposed Protected Structure	LHS005-028	5	Liberties of Carlingford	The Anchorage	House	Detached three-bay two-storey house, built c. 1860. Rectangular-plan.	13825014
Proposed Protected Structure	LHS005-029	5	Back Lane, Liberties of Carlingford	Kendal Cottage	House	Attached two-bay two-storey house, built c. 1820. Rectangular-plan, attached to houses to north and south	13825016
Proposed Protected Structure	LHS005-030	5	Back Lane, Liberties of Carlingford	Castle View	House	Attached three-bay two-storey house, built c. 1820. Rectangular-plan, attached to houses to north and south	13825017
Proposed Protected Structure	LHS005-031	5	Back Lane, Liberties of Carlingford		House	Attached four-bay two-storey house, built c. 1860. Rectangular-plan, attached to houses to north and south.	13825018
Proposed Protected Structure	LHS005-032	5	Back Lane, Liberties of Carlingford	The Spout	Well	Well, built c. 1830. Segmental-headed opening, random coursed limestone walling, iron and concrete reinforcements to arch, circular cast-iron pipe, cast triangular concrete funnel, moss-covered pillar supporting funnel, cast-iron grate to base. Set in painted stone wall to west side of road. Heritage trail plaque in wall.	13825021
Proposed Protected Structure	LHS005-033	5	River Street, Liberties of Carlingford		Walls	Rendered rubble masonry retaining walls, built c. 1800, flanking north and south sides of River Street at sharp corner. Partially damaged to south-east. Mid twentieth century replacement concrete section to north-west.	13825022
Proposed Protected Structure	LHS005-034	5	The Manse, Liberties of Carlingford	The Manse	House	Detached T-plan three-bay two-storey former manse, built c. 1790, now in use as private house. Recent recessed two-bay two-storey extension to south gable.	13825023

Draft Louth County Development Plan 2009 - 2015.
Record of Protected Structures.

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Proposed Protected Structure	LHS005-035	5	Dundalk Street, Liberties of Carlingford	Mountain View	House	Detached multiple-bay three-storey house, built c. 1860. Rectangular-plan, two-storey return to east.	13825024
Proposed Protected Structure	LHS005-036	5	Serene Silver, Dundalk Street,	Serene Silver	Warehouse	Detached multiple-bay two-storey former warehouse, built c. 1820, now in use as shop.	13825025
Proposed Protected Structure	LHS005-037	5	Kingfisher Bistro, Dundalk Street,	Kingfisher Bistro	Warehouse	Detached four-bay three-storey former warehouse, built c. 1820, now in use as restaurant. Rectangular-plan, late twentieth century glass and rendered extension to east	13825026
Proposed Protected Structure	LHS005-038	5	Stone Gateway, Dundalk Street,	Stone Gateway	Walls	Stone gateway, built c. 1820. Random rubble stone walling, saddle-coping, squared limestone quoins to north-east corner. Camber-headed carriage arch, limestone voussoirs, corrugated-iron gate; square-headed pedestrian gate to north, limestone relieving arch. Set to west of road, wrought-iron railings to north.	13825027
Proposed Protected Structure	LHS005-039	5	Dundalk Street, Liberties of Carlingford		House	Attached three-bay two-storey house, built c. 1800. Rectangular-plan with three-bay single-storey block to south. Pitched slate roof, clay ridge tiles, unpainted smooth rendered corbelled chimneystack, verge coping, cast-iron gutters on brackets on corbelled eaves course, circular cast iron down pipes.	13825028
Proposed Protected Structure	LHS005-040	5	Dundalk Street, Liberties of Carlingford		House	Attached two-bay two-storey house, built c. 1880, as a pair with the adjoining house to the south. Rectangular-plan.	13825029
Proposed Protected Structure	LHS005-041	5	Dundalk Street, Liberties of Carlingford		House	Attached two-bay two-storey house, built c. 1880, as a pair with the adjoining house to the north. Rectangular-plan.	13825030
Proposed Protected Structure	LHS005-042	5	Dundalk Street, Liberties of Carlingford		House	Corner-sited attached two-bay two-storey house, built c. 1910, built as a pair with the adjoining house to the south. Rectangular-plan, chamfer to north-west corner, single-storey return and two-storey red brick extension to east.	13825031
Proposed Protected Structure	LHS005-043	5	Dundalk Street, Liberties of Carlingford		House	Attached two-bay two-storey house, built c. 1910, built as a pair with the adjoining house to the north. Rectangular-plan, single-storey return to east.	13825032
Proposed Protected Structure	LHS005-044	5	Dundalk Street, Liberties of Carlingford	The Abbey Bar	House	End-of-terrace two-bay two-storey house, built c. 1890, formerly also in use as public house, now in use as house. Rectangular-plan, return to east.	13825034
Proposed Protected Structure	LHS005-045	5	Dundalk Street, Liberties of Carlingford		Mill Race	Former millrace, built c. 1650, running north-east to south-west, becoming culvert to south-west, now disused. Rubble stone walling, soldier coping to south wall, whitewashed walling to south-west, drain to mid-section of south wall, stone lined culvert going beneath street to sw. Set to side of lane running eastwards off Dundalk St, remains of Dominican abbey to north.	13825035
Proposed Protected Structure	LHS005-046	5	St. Michael's Roman Catholic Church, Commons	St. Michael's Roman Catholic Church	Church	Freestanding Gothic Revival Roman Catholic church, built c. 1870. Five-bay side elevation to nave, breakfront to east, projecting gable-fronted chancel to west, sacristy to south-west, gable-fronted entrance porch to north, recent gable-fronted glazed entrance porch to east.	13825036
Proposed Protected Structure	LHS005-047	5	Commons	Post Box	Post Box	Cast-iron post box, c. 1880, with VR insignia and crown motif. Replacement cast-iron door, c. 1925, with embossed SAORSTAIT EIREANN emblem. Mounted in rubble masonry wall, forming east boundary to church and Parochial House, fronting onto street.	13825037


Draft Louth County Development Plan 2009 - 2015.
Record of Protected Structures.

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Proposed Protected Structure	LHS005-048	5	Parochial House, Dundalk Street, Commons	Carlingford Parochial House	Parochial House	Detached three-bay two-storey parochial house, built c. 1920. Rectangular-plan, flat-roofed porch flanked by cantled bay windows to east, two-storey extension to west.	13825038
Proposed Protected Structure	LHS005-049	5	Carlingford Tourist Office,	Carlingford Tourist Office	Railway Station	Detached H-plan seven-bay single-storey former railway station, dated 1876, now in use as tourist office.	13825042
Proposed Protected Structure	LHS005-050	5	Liberties of Carlingford	Pier	Pier/jetty	Angled stone-built pier, built c. 1850. Unpainted smooth- and roughcast-rendered walling, tooled limestone ashlar coping; smooth rendered storm wall to east. Limestone paving and concrete surface to pier. Tooled limestone steps to water, limestone paved slipway to south-west with wrought-iron horizontal bars. Limestone bollards to quay side. Running northwards into Carlingford Lough, forms harbour with corresponding pier to west.	13825043
Proposed Protected Structure	LHS005-051	5	Liberties of Carlingford	Pier	Pier/jetty	Stone-built pier, built c. 1840. Rock-faced squared-and-snecked stone walling, limestone coping. Storm wall to north. Concrete surface to pier. Tooled limestone steps to water. Granite bollards; cast-iron bollard embossed with "CH GIL" and hallmark of James Shekleton Ironworks, Dundalk; cast-iron lamp standards with scrolled detailing. Running eastwards into Carlingford Lough, forms harbour with corresponding pier to east.	13825044
Proposed Protected Structure	LHS005-052	5	Tholsel Street, Liberties of Carlingford		House	Corner-sited attached three-bay three-storey house, built c. 1760. Rectangular-plan, return and extensions to east, attached to house (PJs Anchor Bar) to north.	13825046
Proposed Protected Structure	LHS005-053	5	Liberties of Carlingford		Boathouse	Detached L-plan multiple-bay single-storey former boathouse, built c. 1870, now in use as house. Pitched and hipped slate roofs with rendered chimneystacks. Roughly dressed limestone walls. Replacement fittings to openings.	13825048
Proposed Protected Structure	LHS005-054	5	Newry Street, Liberties of Carlingford		House	Attached two-bay two-storey house, built c. 1750, as a pair with the adjoining house to south. Now also in use as shop.	13825049
Proposed Protected Structure	LHS005-055	5	Newry Street, Liberties of Carlingford		House	Attached two-bay two-storey house, built c. 1750, as a pair with the adjoining house to north. Lean-to extension to west.	13825050
Proposed Protected Structure	LHS005-056	5	Carlingford Courthouse, Newry Street,	Carlingford Courthouse / Library	Court House	Detached three-bay single-storey court house, built c. 1935, with projecting entrance porch. Hipped artificial slate roof with stepped parapet and former air raid siren. Plaque with raised lettering over porch. Moulded cornice to porch, square steel windows.	13825051
Proposed Protected Structure	LHS005-057	5	Carlingford Presbyterian Church, Newry Street,	Carlingford Presbyterian Church	Church	Freestanding single-cell gable-fronted Presbyterian church, built 1869, with four-bay nave elevations.	13825052
Proposed Protected Structure	LHS005-058	5	St. Michael's Hall, Newry Street,	St. Michael's Hall	Church/parish hall	Detached three-bay two-storey over basement church hall, dated 1925. Single-storey over basement cantled west wing, three-bay single-storey flat-roofed concrete-built extension to north elevation.	13825053
Proposed Protected Structure	LHS005-059	5	Carlingford Garda Station, Newry Street,	Carlingford Garda Station	Police Station	Detached seven-bay two-storey former coastguard station, dated 1848, later used as courthouse and now in use as Garda Station. Rectangular main block, advanced gabled end bays to north and south, cantled bay window to south-east, hipped return to south-west, porch to south, two storey flat roofed extension to north, lean-to extensions to sw.	13825054

Draft Louth County Development Plan 2009 - 2015.
Record of Protected Structures.

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Proposed Protected Structure	LHS005-060	5	Newry Street, Liberties of Carlingford	Eblana House	House	Attached three-bay two-storey house, built c. 1830, with return to west.	13825055
Proposed Protected Structure	LHS005-061	5	Tholsel Street, Liberties of Carlingford	Market Street	House	Corner-sited attached three-bay three-storey house, built c. 1780, with shopfront inserted to ground floor.	13825056
Proposed Protected Structure	LHS005-062	5	Market Street, Liberties of Carlingford	Mcardles Boutique	House	Attached two-bay three-storey house, built c. 1780, with shopfront inserted to ground floor.	13825057
Proposed Protected Structure	LHS005-063	5	Liberties of Carlingford	Worker's House	House	Detached two-bay single-storey former railway worker's house, built c. 1870, now in use as private dwelling. Single-storey flat-roofed extension to west.	13825058
Proposed Protected Structure	LHS005-064	5	Liberties of Carlingford	Railway Worker's House	Railway Workers House	Detached two-bay single-storey former railway worker's house, built c. 1870, currently unoccupied	13825059
Proposed Protected Structure	LHS005-065	5	Knocknagoran		House	Detached three-bay single-storey house, built c. 1860. Rectangular-plan, gabled porch to south, flat-roofed extension to north.	13833007
Proposed Protected Structure	LHS005-066	5	Bayview House, Knocknagoran	Bayview House	House	Detached three-bay two-storey house, built c. 1800. L-plan, two-storey return to west elevation set in internal angle, single-storey block to south.	13833010
Proposed Protected Structure	LHS005-067	5	Prospect House, Knocknagoran	Prospect House	House	Detached four-bay two-storey house, built c. 1740, no longer in use. Formerly T-plan, gabled bays to east, gabled east bay to south elevation, return and flat-roofed extension to west.	13833011
Proposed Protected Structure	LHS005-068	5	Nucella Lodge, Knocknagoran	Nucella Lodge	House	Detached five-bay single-storey house, built c. 1840. Rectangular-plan, paired hipped breakfronts containing box bay windows to east.	13833012
Proposed Protected Structure	LHS005-069	5	Oberon Villa, Knocknagoran	Oberon Villa	House	Detached four-bay two-storey house, built c. 1880. Rectangular-plan, flat-roofed two-storey extension to west elevation.	13833013
Proposed Protected Structure	LHS005-070	5	Altmore House, Drummullagh	Altmore House	House	Detached three-bay two-storey house, built 1846. Symmetrical gabled breakfronts, central square porch projecting from east elevation, two-bay two-storey in line extension to north, single-storey pitched roof porch to west (rear).	13833014
Proposed Protected Structure	LHS005-071	5	Ghan Road	Railway Cottage	Railway Worker's House	single-storey former railway worker's house, built c. 1870.	

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Existing Protected Structure	Lhs006-001	6	Plaster	Kilcurley Church	Church	Freestanding Roman Catholic church, built c. 1820. Cruciform-plan, flat-roofed sacristy and extensions to north, three-stage stone tower, ashlar crenellations and pinnacles to west c. 1880, battlemented belltower with lancets 1876, extension to east transept, gable-fronted porch to east.	13900607
Existing Protected Structure	Lhs006-002	6	Deerpark	Taffy Jennys Court / Deerpark House	Ruin	Three basement walls of an early 17thC house showing early brickwork and vaults	
Proposed Protected Structure	LHS006-003	6	Clonaleenaghan House,	Clonaleenaghan House	House	Detached five-bay two-storey house, built c. 1720, attached to three-bay two-storey house to north c. 1840. Rectangular-plan, lean-to returns to west.	13900601
Proposed Protected Structure	LHS006-004	6	Philipstown House, Philipstown	Philipstown House	House	Detached five-bay two-storey house, built 1826. Projecting gable-fronted full-height entrance bay to north elevation, Victorian addition to south c. 1860, double-height canted bay window to south-east, canted bay windows to east and west elevations.	13900603
Proposed Protected Structure	LHS006-005	6	Barronstown Rectory, Philipstown	Barronstown Rectory	Curate's House	Detached three-bay two-storey over basement rendered former rectory, built c. 1780, now in use as private house. Rectangular-plan, bowed porch to south, single-pitched return to north, block to north-west terminating in bow, extension to east.	13900604
Proposed Protected Structure	LHS006-006	6	Ford's Bridge, Deerpark	Ford's Bridge	Road Bridge	Six-arch road bridge, built c. 1730, over river. Random rubble walls, rubble stone triangular cutwater to east and west, stone coping to parapet. Segmental-headed arched openings with roughly dressed stone voussoirs. Bridge spanning Castletown River.	13900606
Proposed Protected Structure	LHS006-007	6	Tullagee House, Tullagee	Tullagee House	House	Detached three-bay two-storey house, built c. 1820. Flat-roofed extension to west.	13900612
Proposed Protected Structure	LHS006-008	6	Killycronee Bridge, Killycronee	Killycronee Bridge	Road Bridge	Single-arch road bridge, built c. 1880, carrying road from Knockbridge to Forkhill over former Great Northern Railway.	13900608
Proposed Protected Structure	LHS006-009	6	Killycronee House, Killycronee	Killycronee House	House	Detached three-bay two-storey house, built c. 1820. L-plan, return and flat roof extension to north-east.	13900609
Proposed Protected Structure	LHS006-010	6	Killycronee House Outbuildings, Killycronee	Killycronee House Outbuildings	Outbuilding (Domestic)	Ranges of stone outbuildings, dated 1800, to Killycronee House. Seven-bay two-storey north range , six-bay single-storey L-plan west range. Pitched slate roofs, clay ridge tiles, uPVC gutters. Random coursed stone walling to north range, painted stone wali to west.	13900610
Proposed Protected Structure	LHS006-011	6	Tullagee Bridge, Tullagee	Tullagee Bridge	Road Bridge	Single-arched stone road bridge, built c. 1880, carrying road over former Great Northern Railway.	13900611

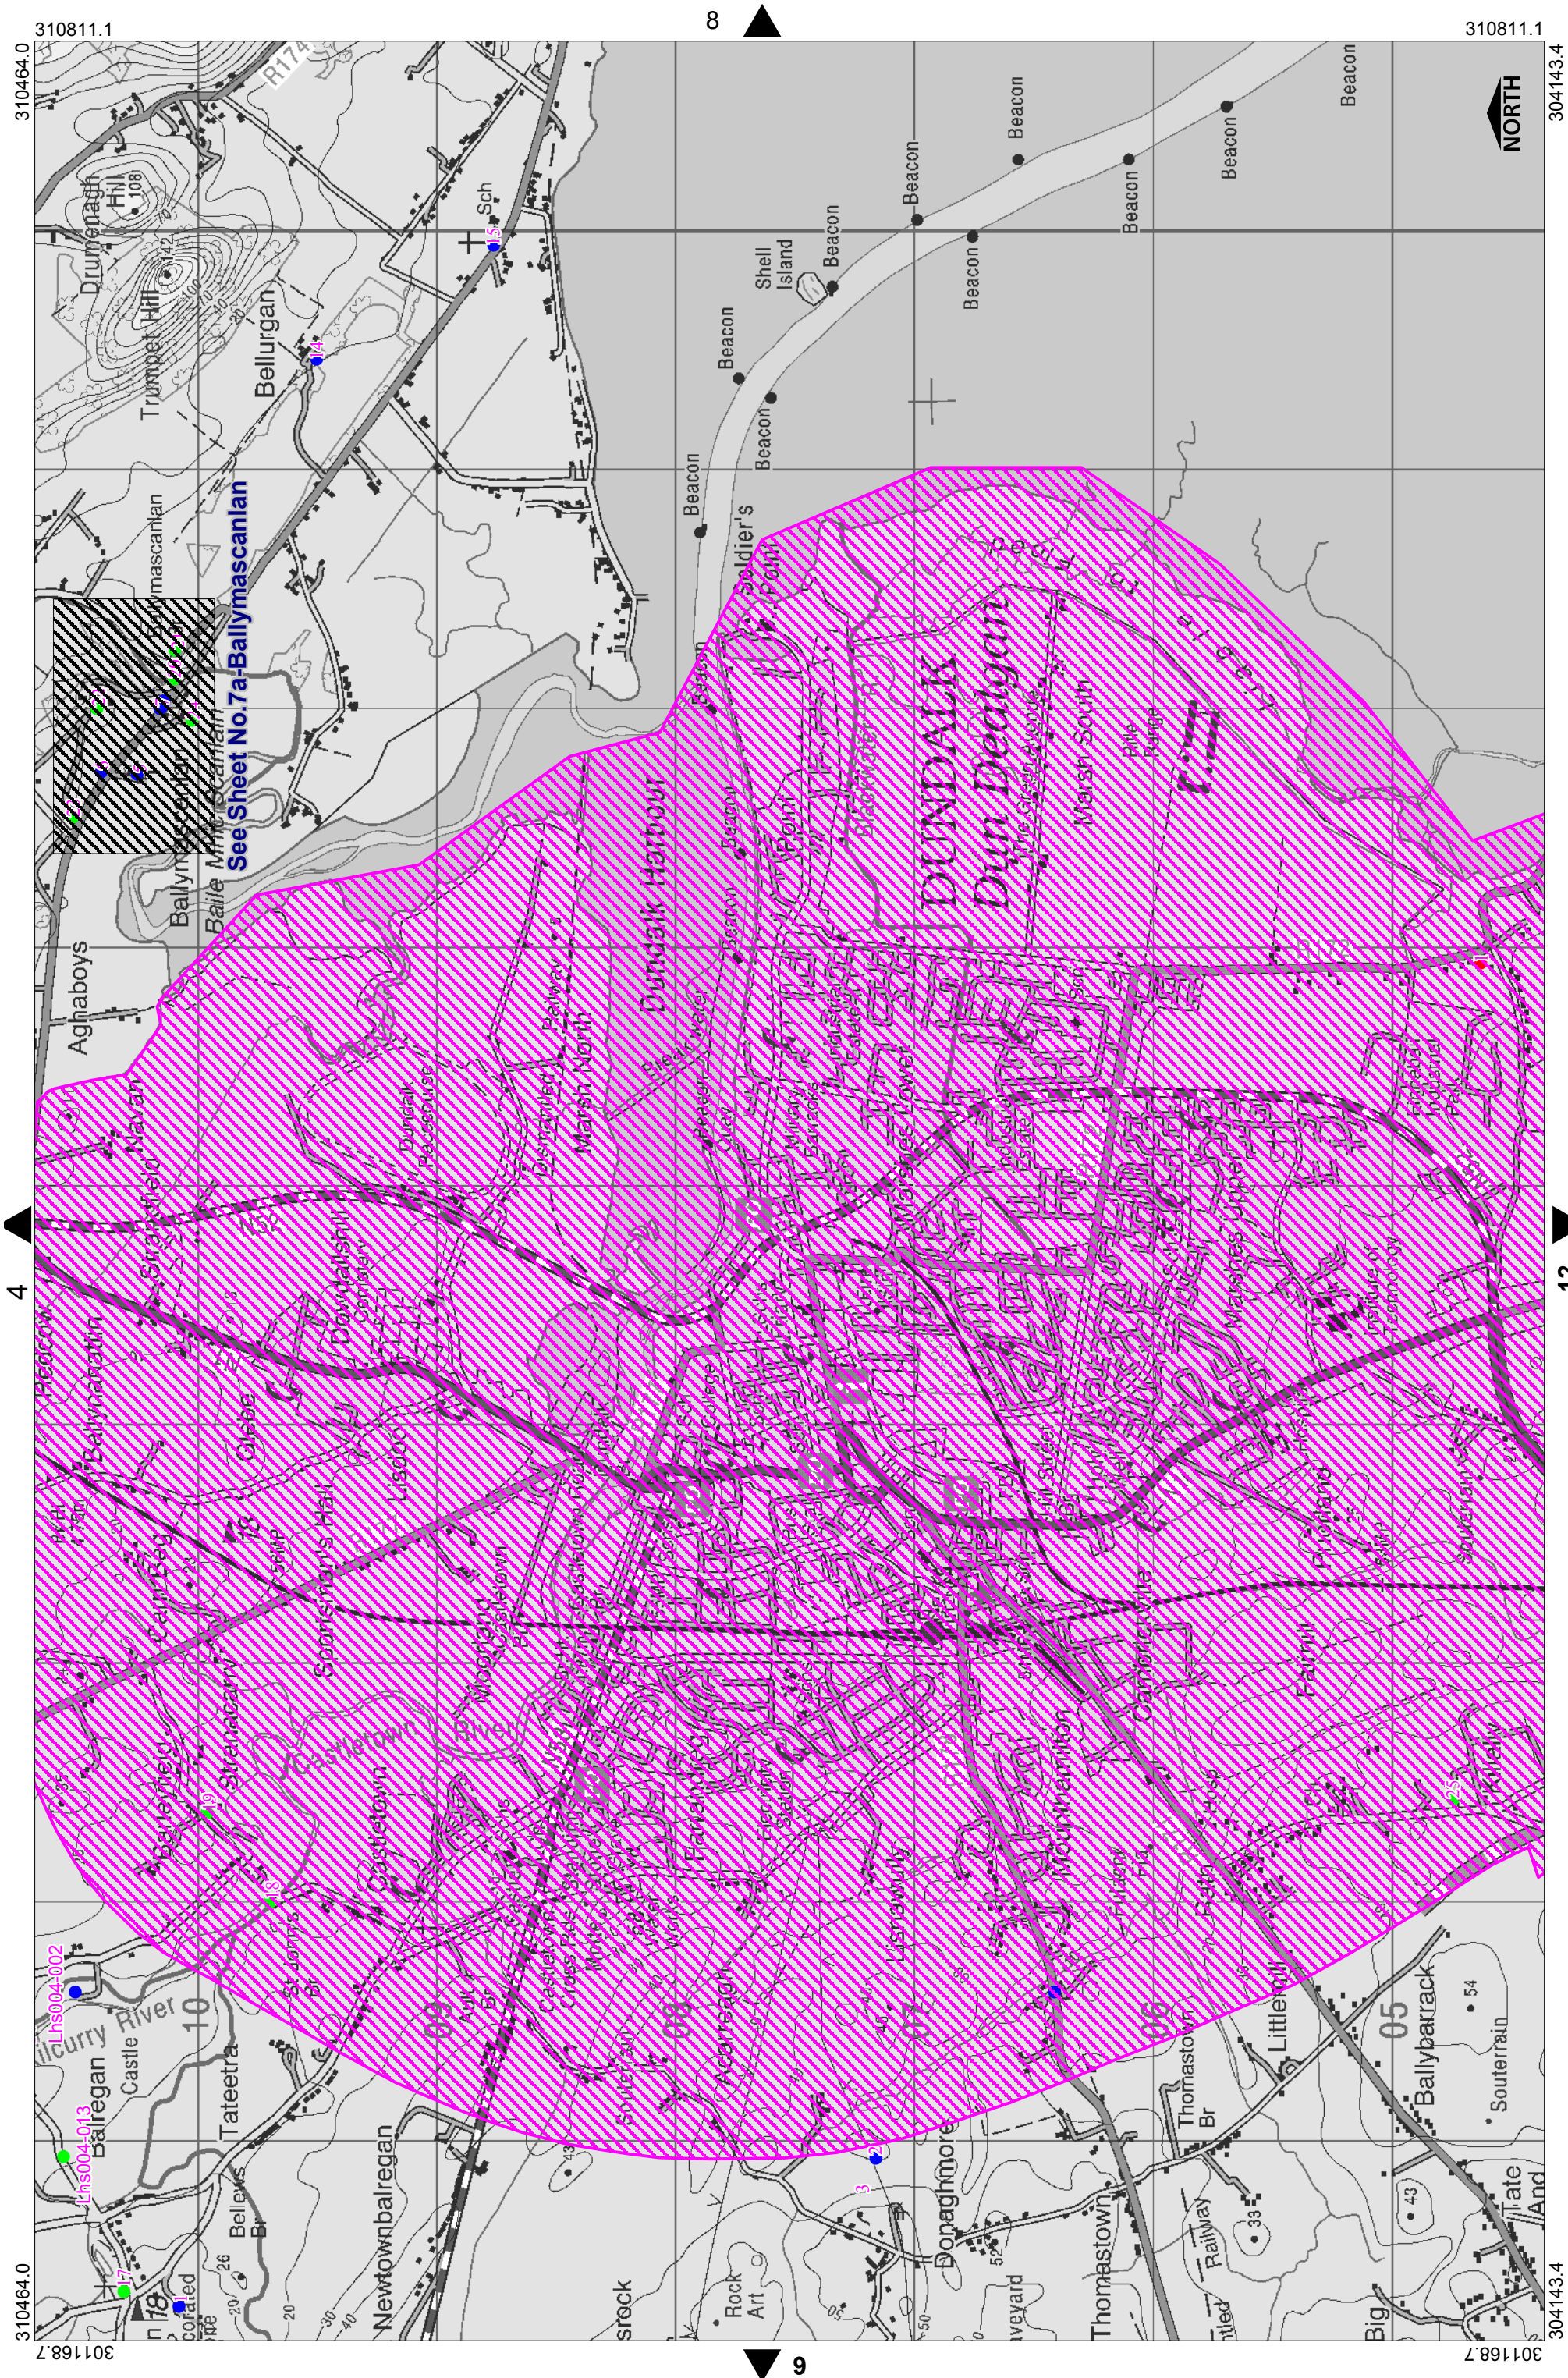


Planning Department
Louth County Council
 County Hall, Millennium Centre,
 Saint Alphonsus Road, Dundalk.
 Telephone : 042 9353180
 E-Mail: planning@louthcoco.ie

Note: Details shown on this map are for information purposes only.
Further details on any item should be clarified with Louth County Council.
The map has been produced by Louth County Council with available Local Authority and Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number 2009/30/CCMA/LouthLocalAuthorities.

Not to scale when printed A3 Landscape

Louth County Council
Record of Protected Structures
Sheet No 7


- | | |
|---|--|
| <ul style="list-style-type: none"> Protected Structure Proposed Protected Structure Proposed to be deleted from Register of Protected Structures | <p>All Protected structures within this boundary are in the Dundalk & Environs Plan.</p> |
|---|--|

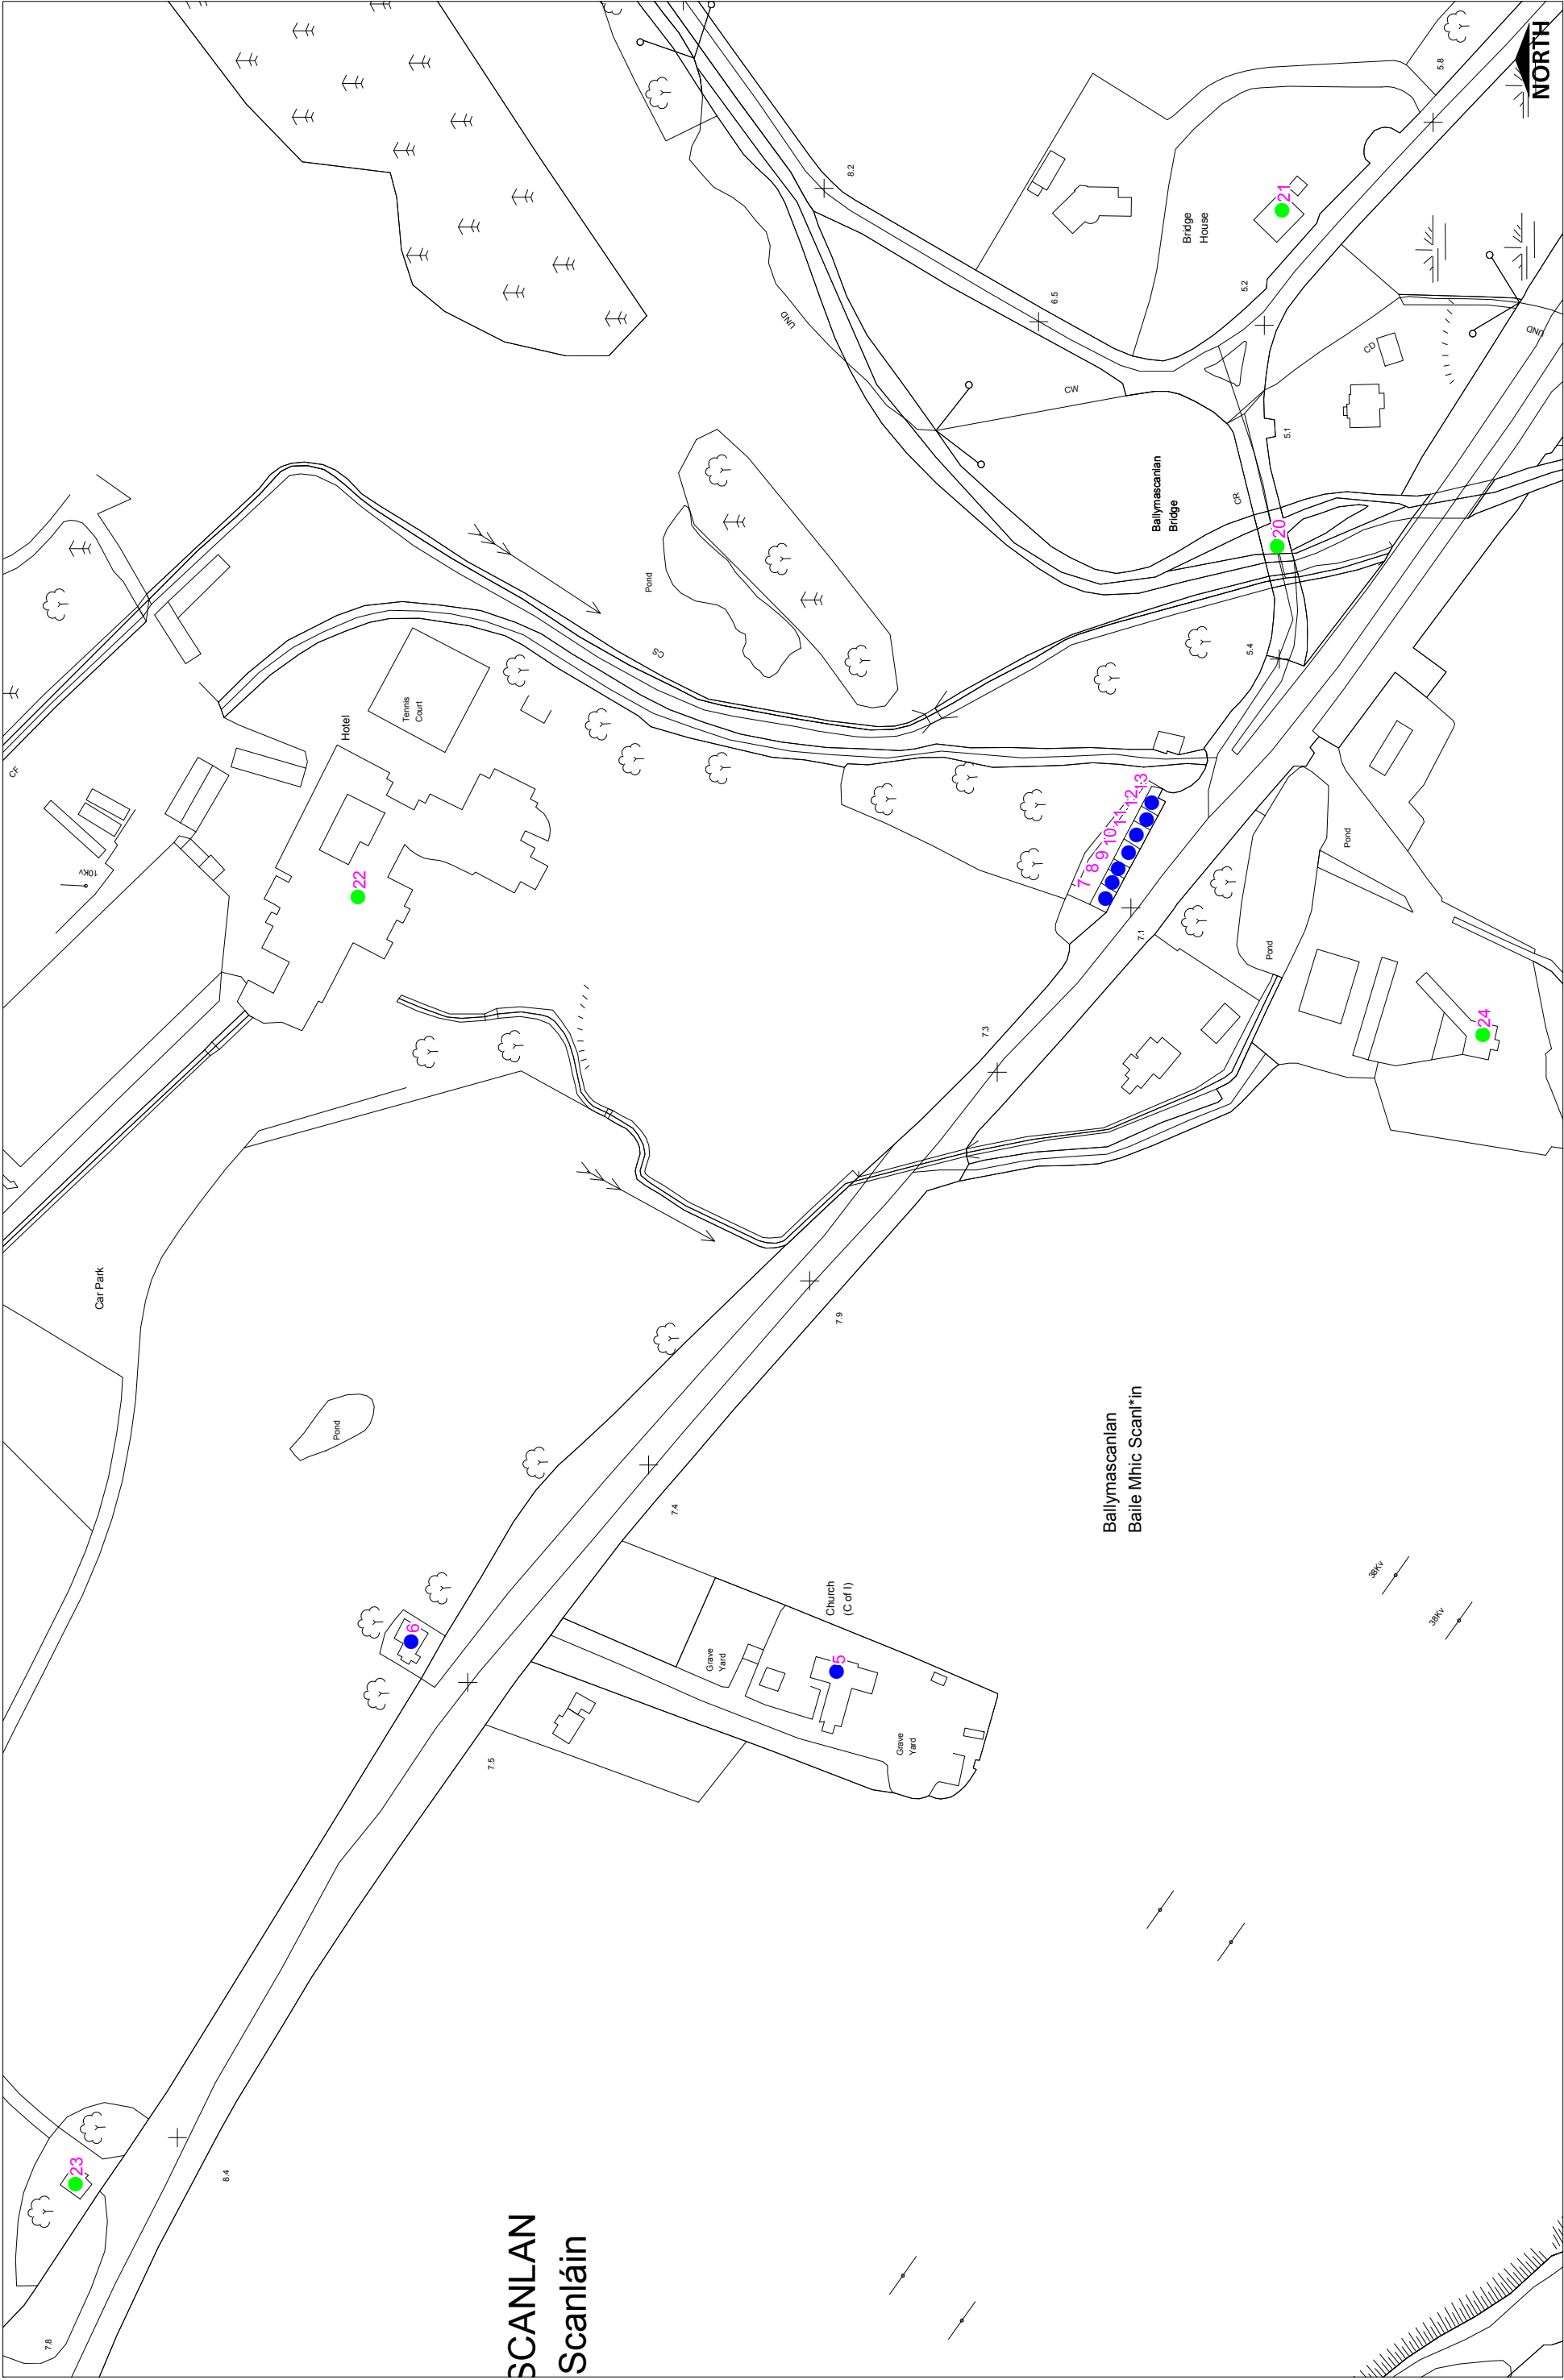

Draft Louth County Development Plan 2009 - 2015.
Record of Protected Structures.

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Existing Protected Structure	Lhs007-001	7	Killin	Killin Park	House	Detached Victorian three-bay two-storey house with shallow hipped roof and breakfront. built c. 1910.	13900739
Existing Protected Structure	Lhs007-002	7	Donaghmore	Donaghmore Souterrain	Souterraine		
Existing Protected Structure	Lhs007-005	7	Ballymascanlon	St Mary's Church Of Ireland	Church	Freestanding Board of First Fruits style Church of Ireland church, built c. 1820. Cruciform-plan, engaged square-plan two-stage tower to west, stepped castellated parapet, stone corner finials. believed to incorporate part of an earlier church.	13900759
Existing Protected Structure	Lhs007-006	7	Ballymascanlon	Ballymascanlon Parochial Hall	Parish Hall	Edwardian red brick detached three-bay single-storey parochial hall, built c. 1880. Rectangular-plan with projecting gable-fronted porch to south-west, lean-to extension to north-east.	13900758
Existing Protected Structure	Lhs007-007	7	Ballymascanlon	Estate Cottage 1	Cottage	End-of-terrace two-bay single-storey with attic house, built c. 1820, as part of a terrace of seven, now disused. high pitched roof, gothic glazing and decorative bargeboards. Rectangular-plan with single-pitched corrugated-iron extension to south-east gable.	13900753
Existing Protected Structure	Lhs007-008	7	Ballymascanlon	Estate Cottage 2	Cottage	Terraced two-bay single-storey with attic house, built c. 1820, as part of a terrace of seven, now disused. high pitched roof, gothic glazing and decorative bargeboards.	13900752
Existing Protected Structure	Lhs007-009	7	Ballymascanlon	Estate Cottage 3	Cottage	Terraced three-bay single-storey with attic house, built c. 1820, as part of a terrace of seven, now disused. high pitched roof, gothic glazing and decorative bargeboards.	13900751
Existing Protected Structure	Lhs007-010	7	Ballymascanlon	Estate Cottage 4	Cottage	Terraced three-bay two-storey with attic house, built c. 1820, as part of a terrace of seven. Rectangular-plan with gable-fronted two-bay, high pitched roof, gothic glazing and decorative bargeboards.	13900750
Existing Protected Structure	Lhs007-011	7	Ballymascanlon	Estate Cottage 5	Cottage	Terraced two-bay single-storey with attic house, built c. 1820, as part of a terrace of seven, high pitched roof, gothic glazing and decorative bargeboards.	13900749
Existing Protected Structure	Lhs007-012	7	Ballymascanlon	Estate Cottage 6	Cottage	Terraced two-bay single-storey with attic house, built c. 1820, as part of a terrace of seven, high pitched roof, gothic glazing and decorative bargeboards.	13900748
Existing Protected Structure	Lhs007-013	7	Ballymascanlon	Estate Cottage 7	Cottage	End-of-terrace three-bay single-storey with attic house, built c. 1820, as part of a terrace of seven, high pitched roof, gothic glazing and decorative bargeboards	13900747
Existing Protected Structure	Lhs007-014	7	Belurgan	Belurgan Park	House	Late 18thC two-storey house with three-bay two-storey gabled wing c.1740, farm buildings, folly, and all demesne features	13900746
Existing Protected Structure	Lhs007-015	7	Belurgan	St Mary's Catholic Church	Church	Small T-plan, Freestanding Roman Catholic church, built c. 1830, tower and belfry added c. 1870. Rectangular-plan nave, central crenellated three-stage tower with pinnacle and cross finial to south, side porches, chancel and sacristy to north, Gothic choir gallery. Incl monuments.	13901112
Proposed Protected Structure	LHS007-017	7	Church of the Most Holy Rosary, Killeen	Church Of The Most Holy Rosary	Church	Freestanding Roman Catholic church, built 1850. Projecting gable-fronted sanctuary to east, single-storey flat-roofed porch to south and west, lean-to vestry to north-east.	13900740
Proposed Protected Structure	LHS007-020	7	Ballymascanlon	Ballymascanlon Bridge	Road Bridge	Four-span road-over-river stone bridge, built c. 1860. Squared-and-snecked rubble stone spandrels and parapet, squared rubble stone coping. Round-headed arches, squared rubble voussoirs. Double bitumen carriage, grass verges.	13900754

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Proposed Protected Structure	LHS007-021	7	Bridge House, Ballymascanlon	Bridge House	House	Detached three-bay two-storey house, built c. 1820. Porch extension to south, conservatory to west.	13900755
Proposed Protected Structure	LHS007-022	7	Ballymascanlon House, Ballymascanlon	Ballymascanlon House & 3 Gate Lodges	House	Detached multiple-bay two-storey over basement with attic house, built 1863, incorporating fabric of earlier building, now in use as hotel.	13900756
Proposed Protected Structure	LHS007-023	7	Ballymascanlon	Ballymascanlon House Gate Lodge	Gate Lodge	Detached three-bay single-storey with attic former gate lodge, built c. 1840. Gable-fronted porch to central bay of south-east elevation, lean-to extension to north-west.	13900757
Proposed Protected Structure	LHS007-024	7	Millgrove, Ballymascanlon	Millgrove	House	Detached three-bay two-storey house, built c. 1800. Projecting gable-fronted central bay, single-storey canted bay windows to south-west and north-east, single-storey with attic addition to north-west c. 1840, single-storey house attached to north-west.	13900760

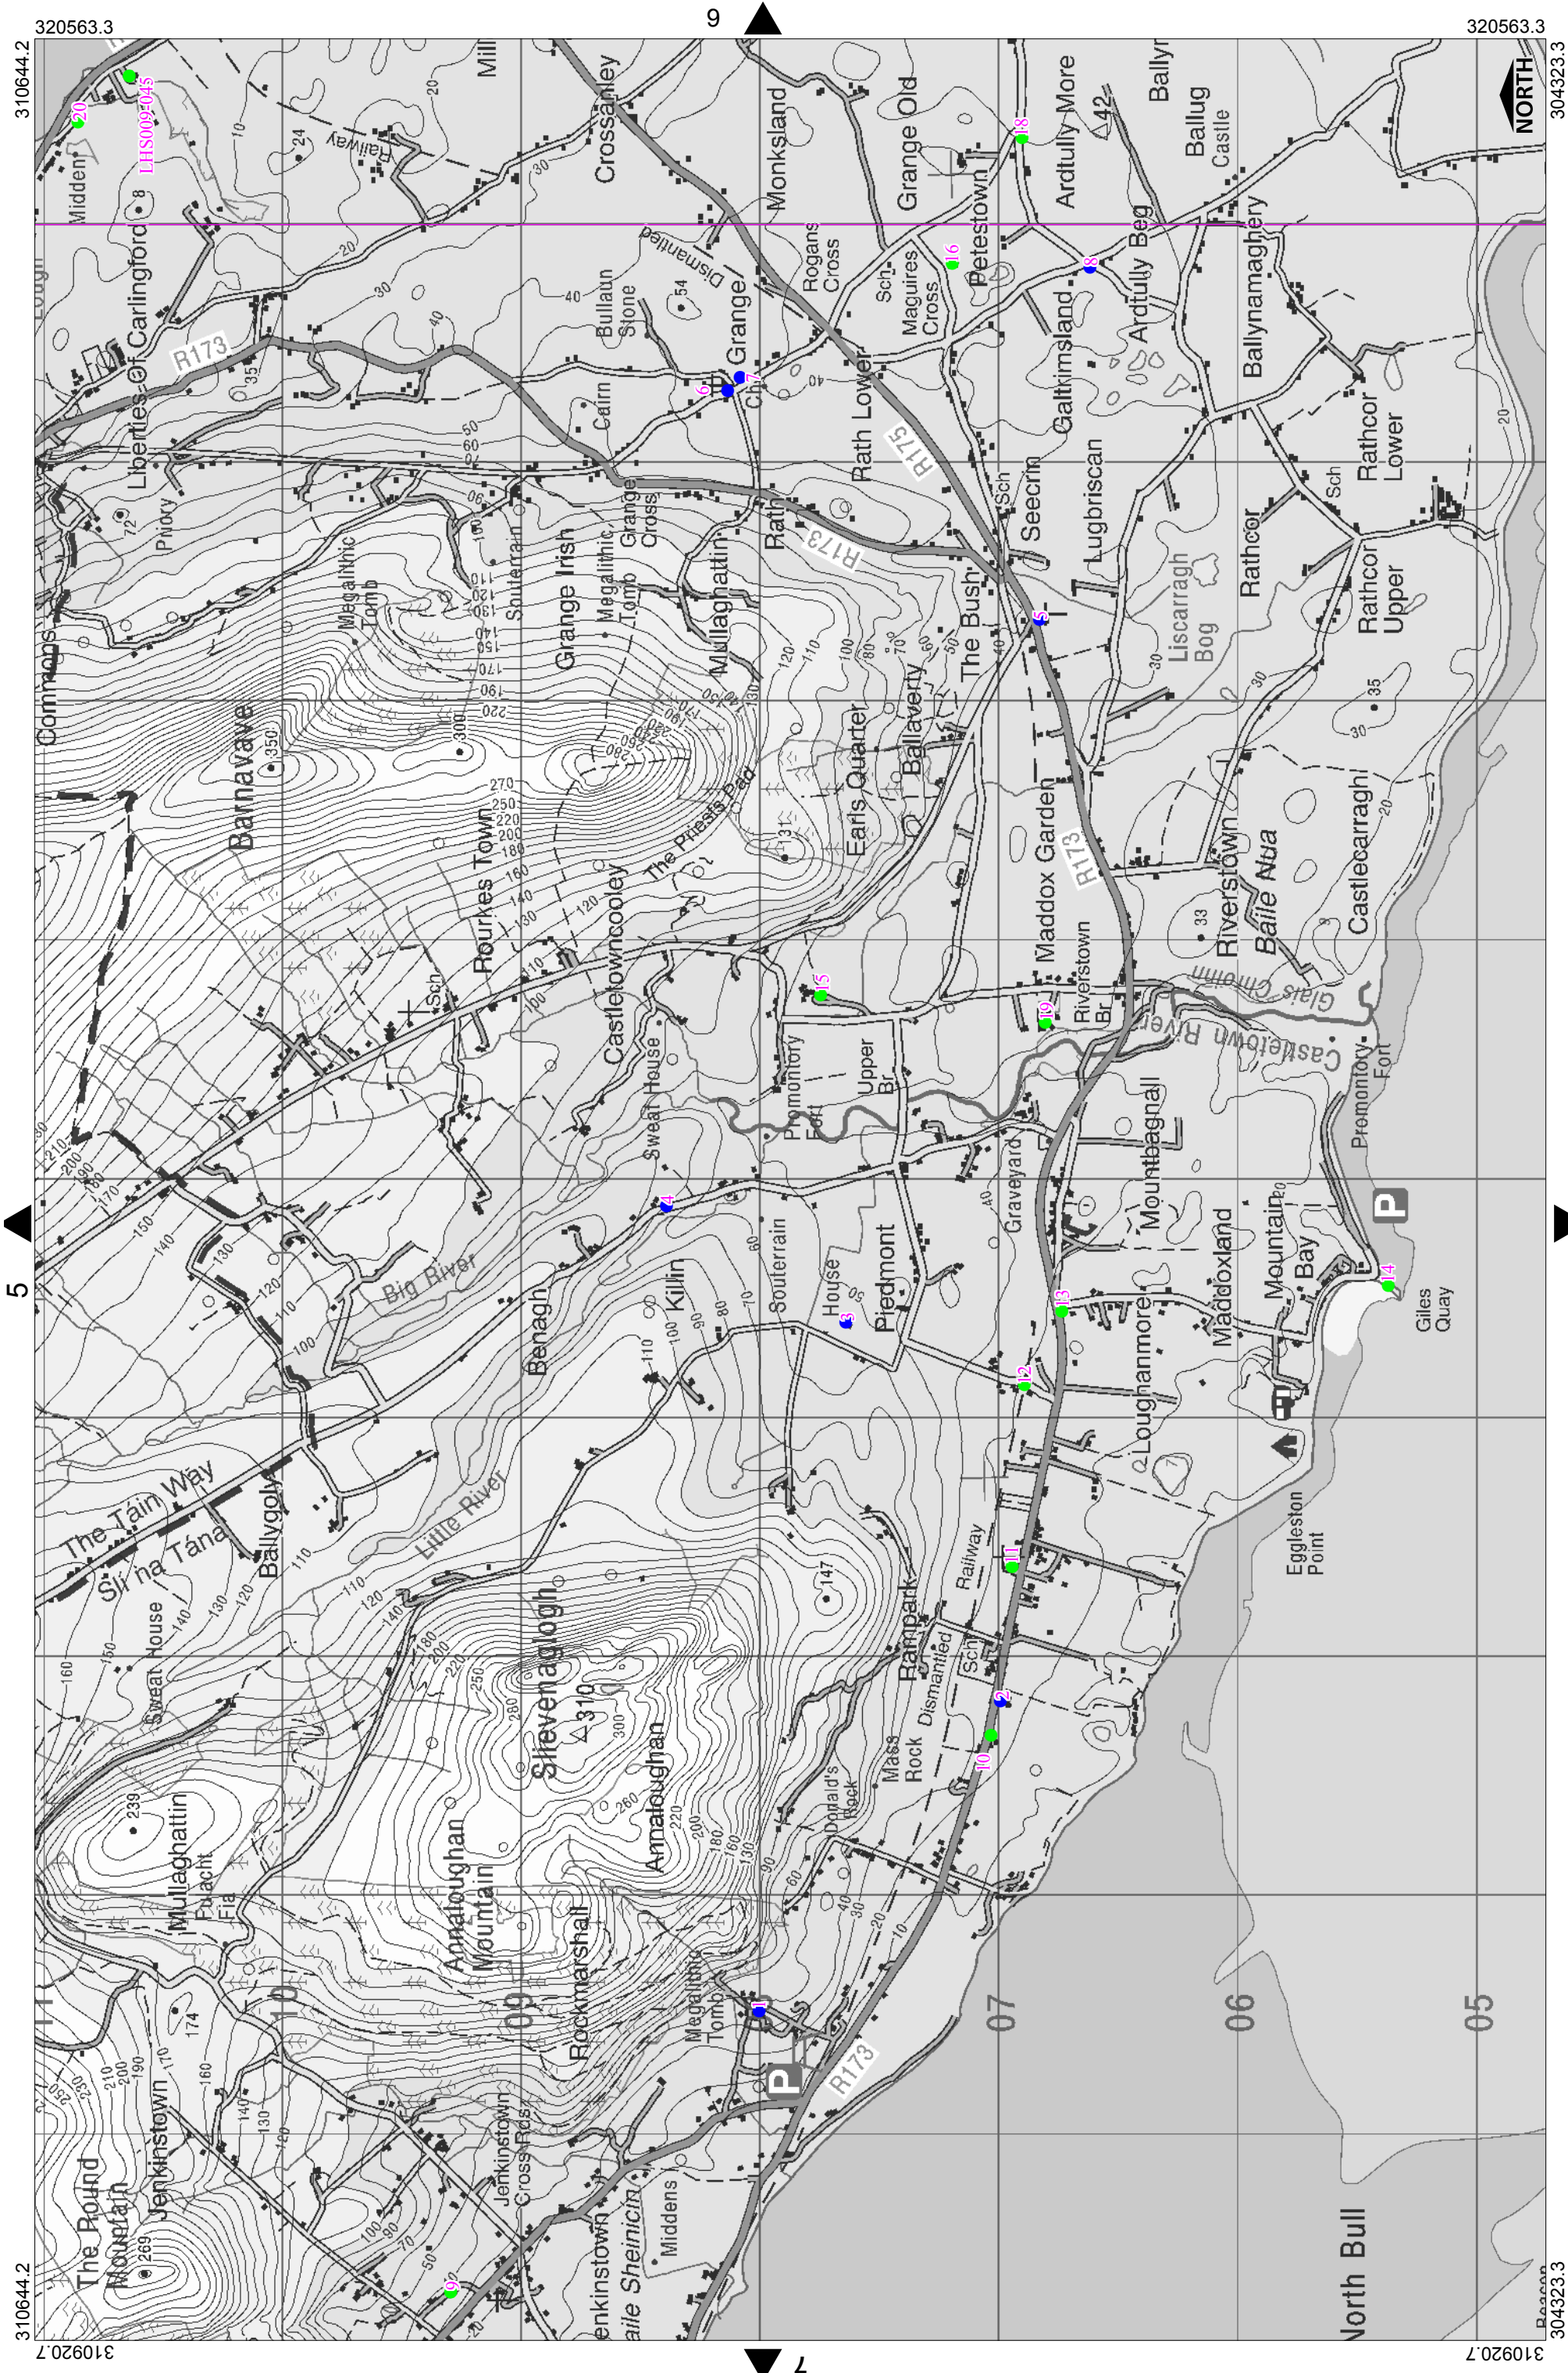

Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie



**Louth County Council
Record of Protected Structures
Sheet No 8**

The map has been produced by Louth County Council with available Local Authority and Ordnance Survey data. (C) Ordnance Survey Ireland. All rights reserved. License Number 2009/30/COWA/Louth.localauthorities.


Not to scale when printed A3 Landscape

- Protected Structure
Proposed Protected Structure
Proposed to be deleted from
Register of Protected Structures

Draft Louth County Development Plan 2009 - 2015.
Record of Protected Structures.

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Existing Protected Structure	Lhs008-001	8	Rockmarshall	Court Cairn	Cairn/portal tomb	Court tomb with gallery 14m long and court at its NE end.	
Existing Protected Structure	Lhs008-002	8	Greenore Road, Rampark	Rampark Thatched House	Thatched Cottage	Detached five-bay two-storey stone walled thatched house, built c. 1750. Rectangular-plan, single-storey extension to east and return to rear (south), gable-fronted porch to centre of main (north) elevation. incl outbuildings - OPW site 09.	13900803
Existing Protected Structure	Lhs008-003	8	Piedmont	Piedmont	Ruin	Rare early 18thC house in ruins, five-bay two-storey, gabled, of rubble stone.	
Existing Protected Structure	Lhs008-004	8	Benagh	Benagh Thatch	Thatched Cottage	Detached direct-entry house, built c. 1800. five-bay whitewashed stone/clay walled whitewashed thatched cottage with galvanised roofed outbuilding attached - OPW site 10	13900818
Existing Protected Structure	Lhs008-005	8	Rathcore	Bush Church And Schoolhouse	Church	Freestanding Church of Ireland church, built c. 1845. Rectangular-plan with four-bay nave, dressed stone pitched stepped bellcote to west gable, gable-fronted chancel projecting to east, gable-fronted porch to west; gable-fronted porch to southsmall stepp	13900811
Existing Protected Structure	Lhs008-006	8	Grange	St James Catholic Church	Church	Freestanding multiple-bay single-storey church, dated 1762, extended 1818 and 1852, renovated and extended 1994. Rectangular-plan with projecting sacristy and square-plan belfry tower, 1818, to south with flanking gable-fronted porches, 1852, projecting gable-fronted extension to west, 1818, with single-storey additions, 1994.	13900812
Existing Protected Structure	Lhs008-007	8	Monksland	Grange Farm Store	Grain Store	Detached five-bay four-storey former granary with belfries. built c. 1810. Rectangular-plan, gable-fronted extension to east, ramp to north gable third-storey with squared coursed rubble plinth walling, rendered segmental coping.	13900813
Existing Protected Structure	Lhs008-008	8	Ardtully Beg	Ardtully Thatch	Thatched Cottage	Detached three-bay single-storey thatched house, built c. 1800. Rectangular-plan, gable-fronted porch to centre west elevation, two-bay single-storey extension to north.	13900815
Proposed Protected Structure	LHS008-009	8	Glebe House, Jenkinstown	Glebe House	House	Detached five-bay two-storey over basement former glebe house, built c. 1780. L-plan, extended to west c. 1850, glass conservatory to west and additions to north.	13900801
Proposed Protected Structure	LHS008-010	8	Rampark		House	Detached four-bay two-storey house, built c. 1840. Rectangular-plan. extended to west c. 1900, gable-fronted single-storey porch to north, lean-to extension to north.	13900802
Proposed Protected Structure	LHS008-011	8	Saint Mary's Roman Catholic Church, Piedmont	Saint Mary's Roman Catholic Church	Church	Freestanding gable-fronted church, built 1858-74. Cruciform-plan with bellcote and pinnacles to south gable, single-storey gable-fronted porches to transepts.	13900804
Proposed Protected Structure	LHS008-012	8	Piedmont		Railway Bridge	Single-span stone railway bridge over road, built c. 1880, now disused.	13900806
Proposed Protected Structure	LHS008-013	8	Loughanmore		House	Detached three-bay two-storey house, built c. 1870. Rectangular-plan, flat-roofed extension to south, single-storey flat-roofed porch with moulded crenellated parapet and dentilled cornice to north.	13900807

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Proposed Protected Structure	LHS008-014	8	Giles Quay Mountbagnall	Giles Quay	Pier/jetty	Random rubble and coursed stone pier, built c. 1870. Stone paving, granite bollards, concrete breakwater to east. Stone steps to west elevation, wrought-iron railing, wrought-iron ladder. Concrete beacon tower to south end of pier.	13900808
Proposed Protected Structure	LHS008-015	8	Castletown House, Castletown	Castletown House	House	Detached four-bay two-storey house, built c. 1870, incorporating fabric of earlier building.	13900809
Proposed Protected Structure	LHS008-016	8	Petestown		Farm House	Detached four-bay two-storey lime-washed farmhouse, built c. 1780. Rectangular-plan, three-bay two-storey main block, single-bay single-storey with attic block to west, lean-to porch to south, corrugated-iron roofed extension to south.	13900814
Proposed Protected Structure	LHS008-018	8	Ardtully More		House	Detached three-bay two-storey house, built c. 1910. Rectangular-plan, single-storey flat-roofed extension to west c. 1960.	13900816
Proposed Protected Structure	LHS008-019	8	Cooley Distillery, Castletowncooley	Cooley Distillery	Factory	Detached multiple-bay multiple-storey alcohol factory, built c. 1935, comprising two-storey entrance block to east of complex, rising to five storey tower-like block to centre of complex and double-height blocks to the western (rear) side of the complex.	13900817
Proposed Protected Structure	LHS008-020	8	Mullatee	Rocklands	House	Detached three-bay two-storey house, built c. 1920. Canted bay windows and projecting hipped porch to east elevation, three-bay two-storey kitchen wing to west.	13900901

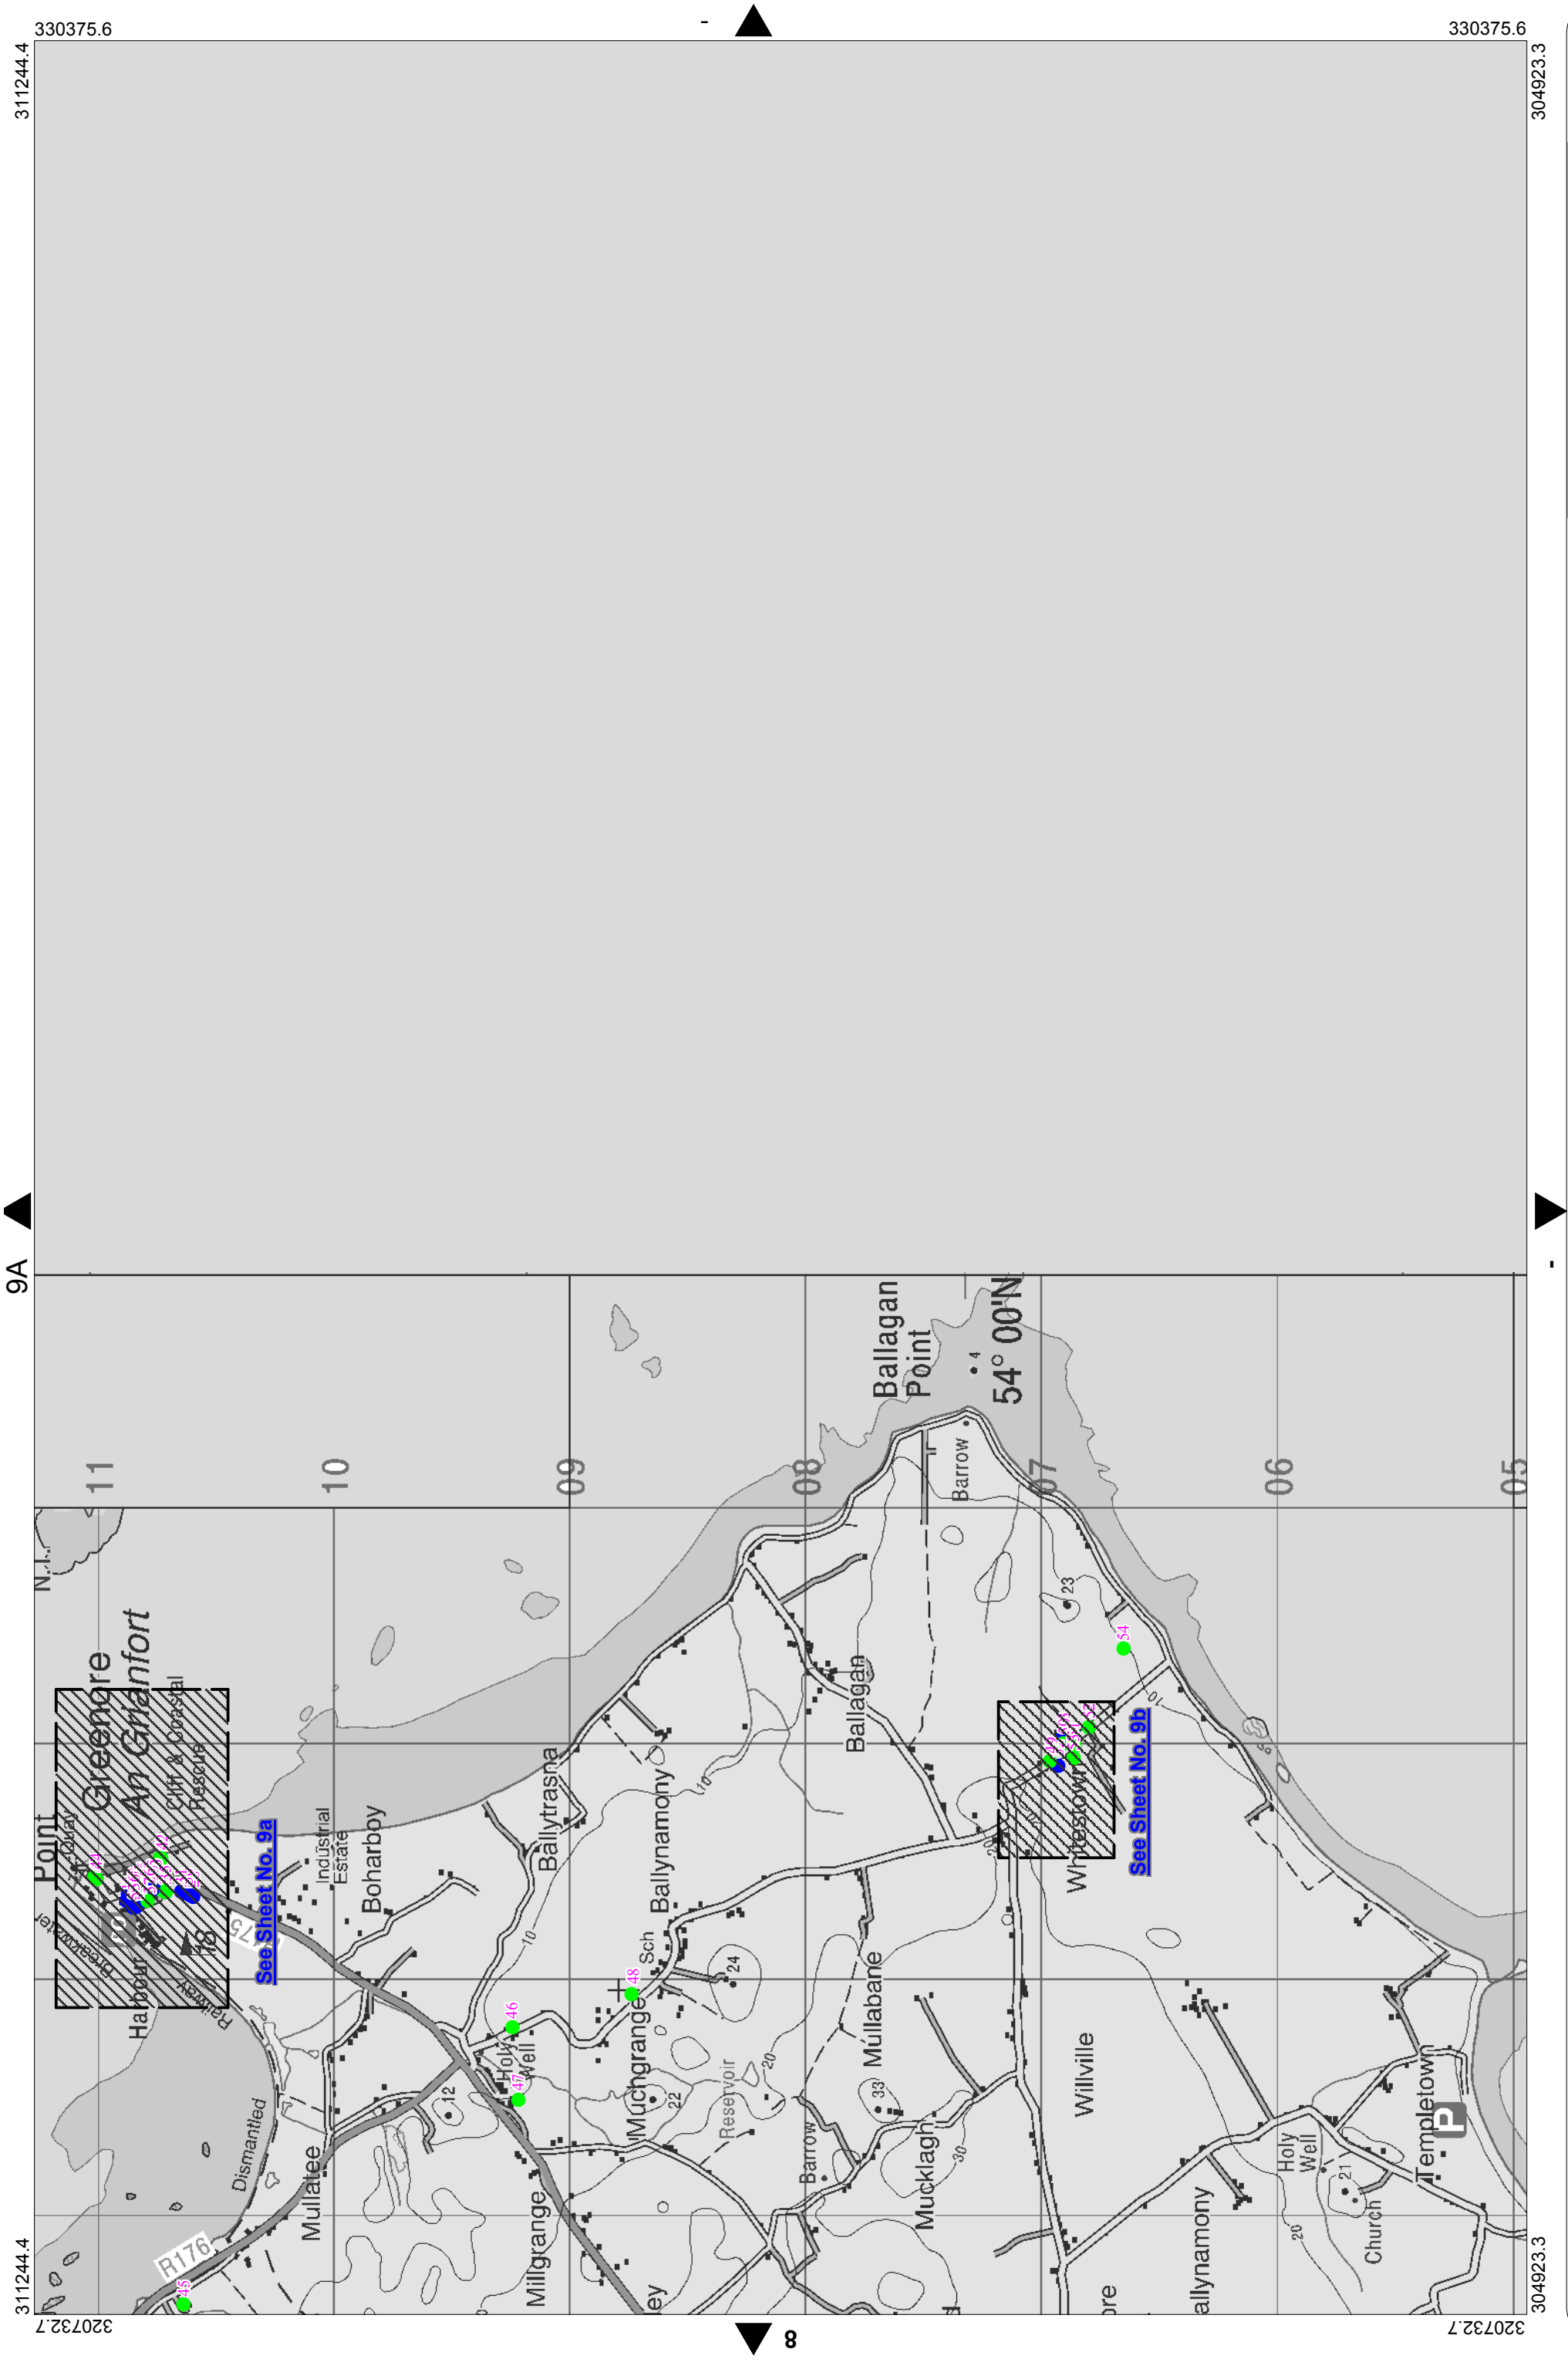




Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie

Louth County Council
Record of Protected Structures
Sheet No 9

Note: Details shown on this map are for information purposes only.
Further details on any item should be clarified with Louth County Council.
The map has been produced by Louth County Council with available Local Authority and Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number 2009/30/CCMA/LouthLocalAuthorities.

Not to scale when printed A3 Landscape

Protected Structure
Proposed Protected Structure
Proposed to be deleted from
Register of Protected Structures

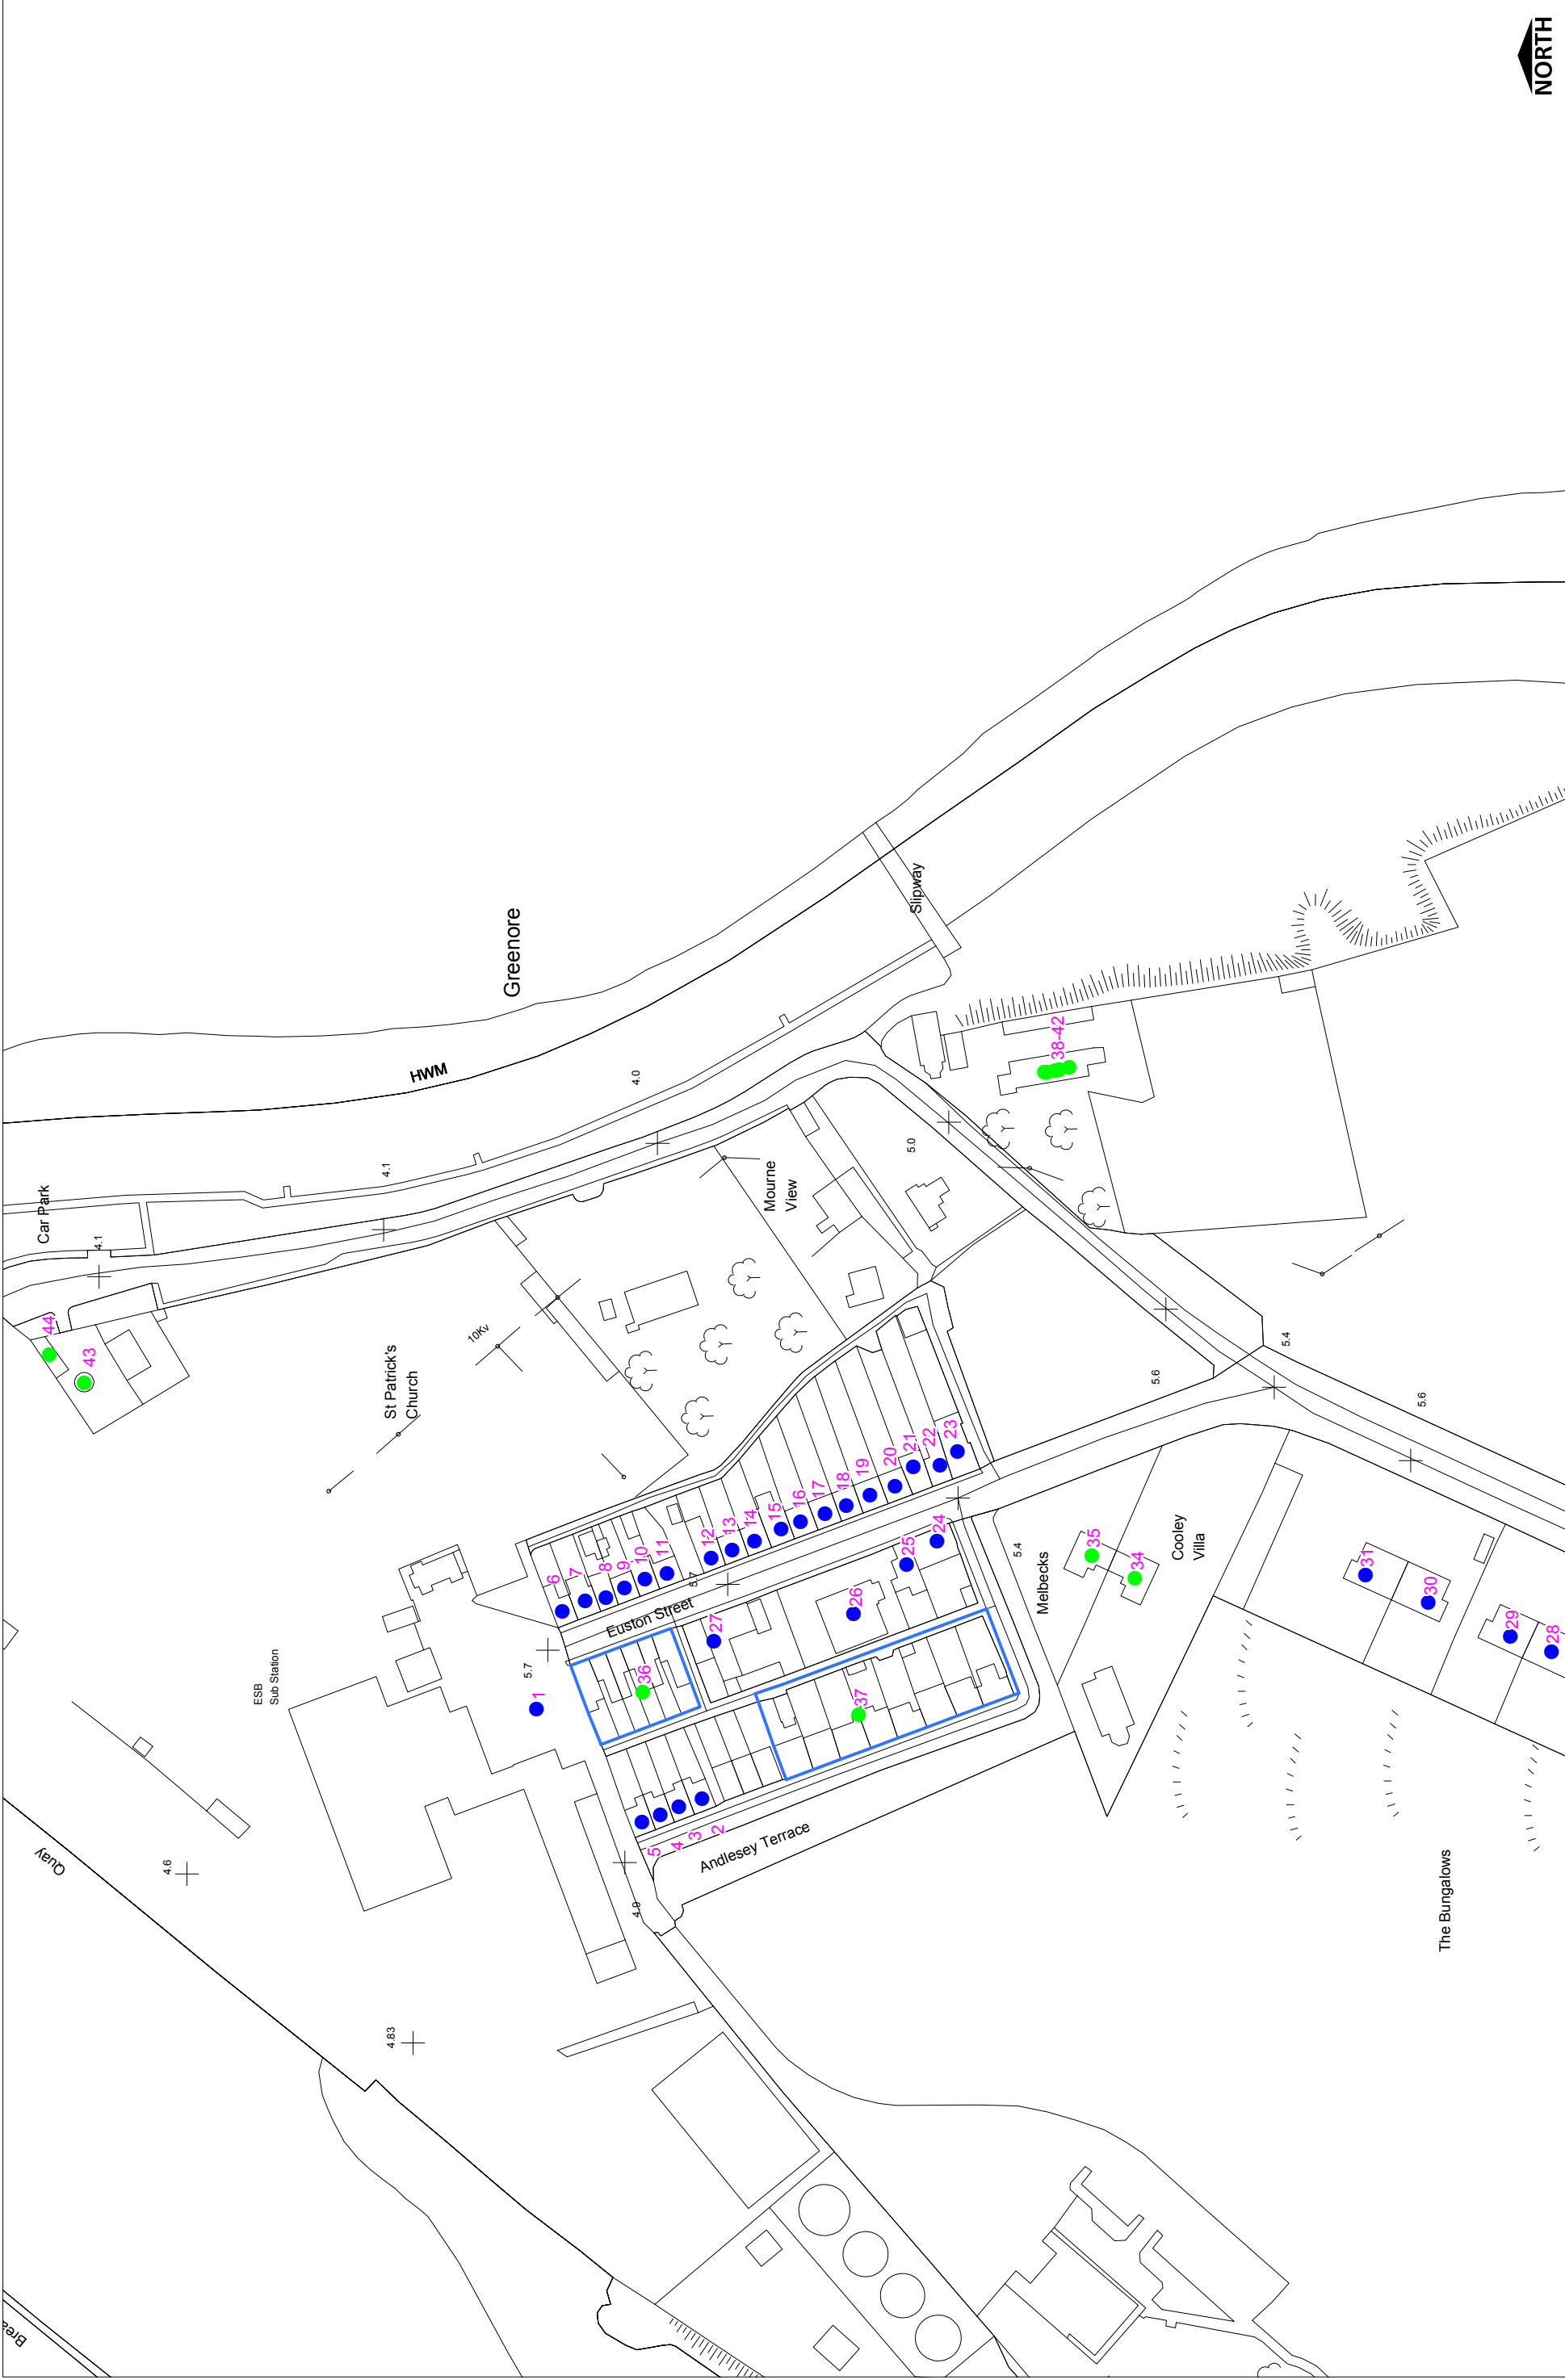

Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie


Note: Details shown on this map are for information purposes only.
Further details on any item should be clarified with Louth County Council.
The map has been produced by Louth County Council with available Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number: 2009/00/CCLMA/LouthLocalAuthorities.

Not to scale when printed A3 Landscape

Louth County Council Record of Protected Structures Sheet No 9(a) Greenore

- Protected Structure
- Proposed Protected Structure
- Proposed to be deleted from Register of Protected Structures

All Protected Structures within
this boundary are in the
Dundalk & Environs Plan

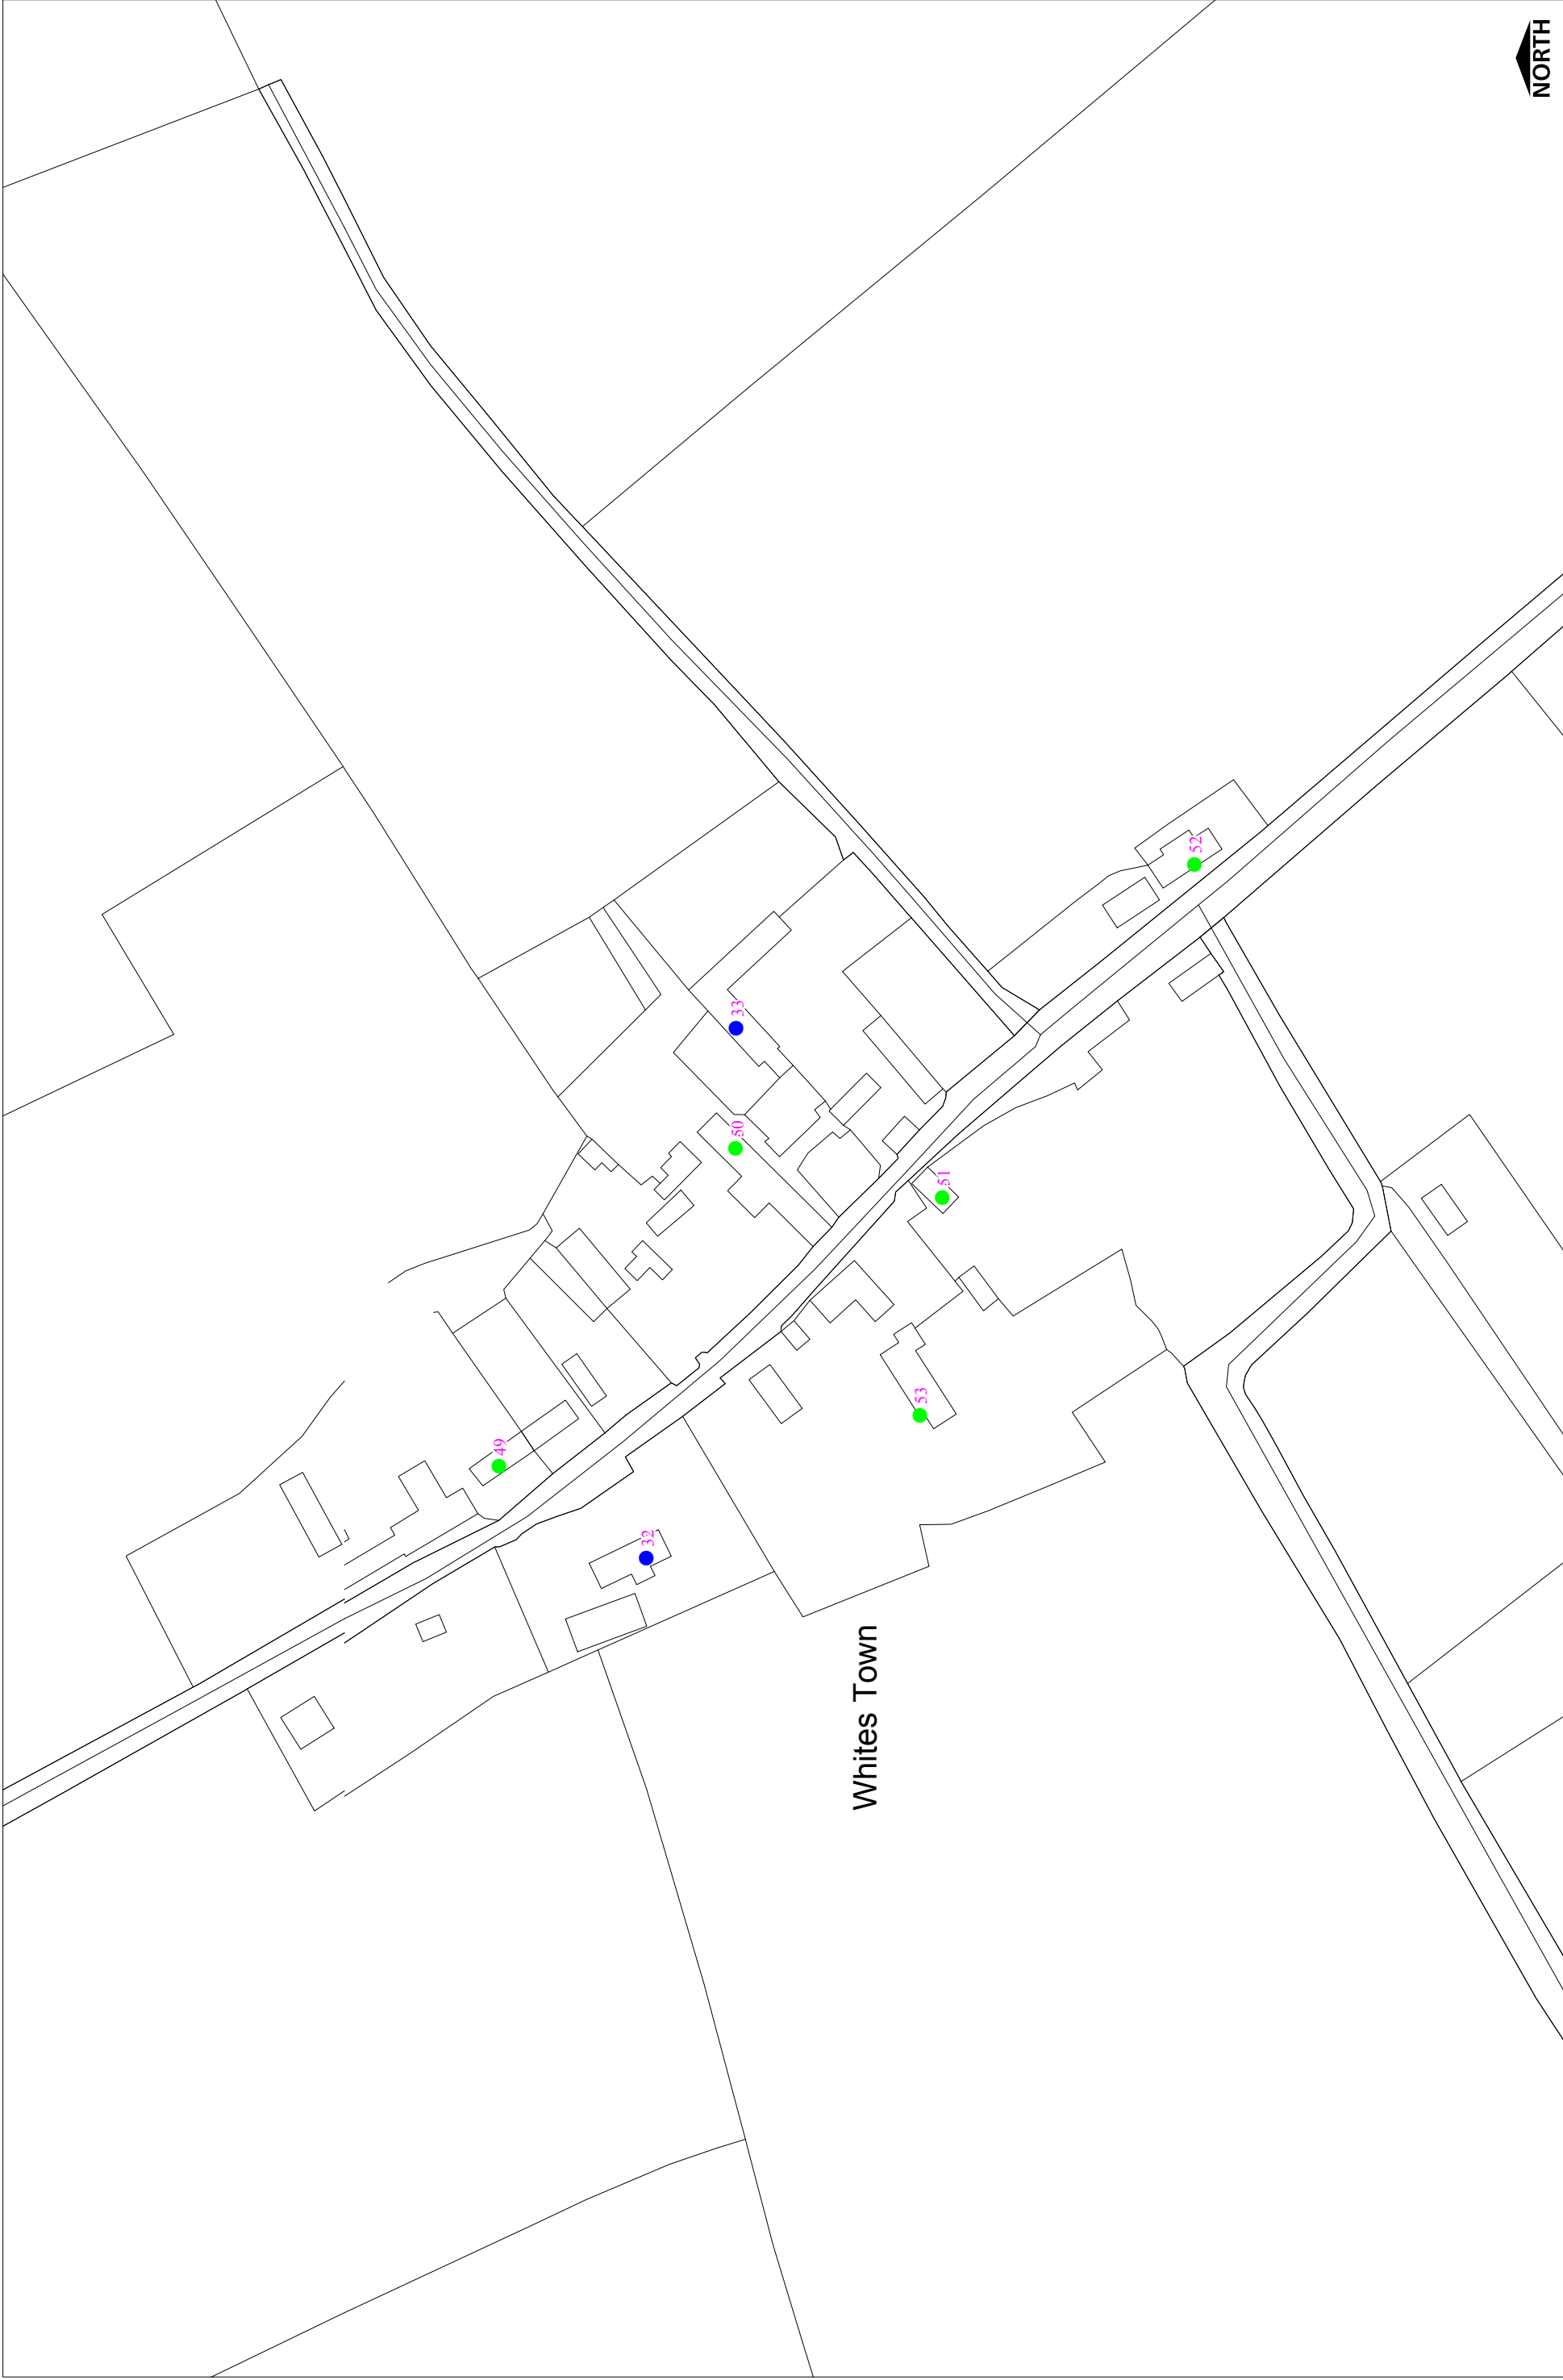

Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie



Louth County Council
Record of Protected Structures
Sheet No 9(b) Whitestown

Note: Details shown on this map are for information purposes only.
Further details on any item should be clarified with Louth County Council.
The map has been produced by Louth County Council with available Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number 2009/00/CCLMA/LouthLocalAuthorities.

Not to scale when printed A3 Landscape



Protected Structure
Proposed Protected Structure
Proposed to be deleted from
Register of Protected Structures

All Protected Structures within
this boundary are in the
Dundalk & Environs Plan

Draft Louth County Development Plan 2009 - 2015.
Record of Protected Structures.

Status	I D	Map Sheet	Address	Name	Description	Notes	NIAH Number
Existing Protected Structure	Lhs009-001	9	Greenore	Water Tower	Water Tower	Attached three-stage stone water tower, built c. 1840, ground floor converted to office lobby with office buildings attached to east and west. Square-plan, steel tank on yellow brick corbel course.	13831025
Existing Protected Structure	Lhs009-002	9	Anglesea Terrace , Greenore	12 Anglesea Terrace	House	End-of-terrace two-bay two-storey with attic house, built c. 1900. Gabled south bay to west elevation, canted bay window to ground floor west elevation, attic, two-storey return and single-storey extension to east.	13831034
Existing Protected Structure	Lhs009-003	9	Anglesea Terrace , Greenore	13 Anglesea Terrace	House	Terraced two-bay two-storey with attic house, built c. 1900. Canted bay window to ground floor west elevation, two-storey return to rear.	13831035
Existing Protected Structure	Lhs009-004	9	Anglesea Terrace , Greenore	14 Anglesea Terrace	House	Terraced two-bay two-storey with attic house, built c. 1900. Canted bay window to ground floor west elevation, two-storey return and single-storey rendered extension to east.	13831036
Existing Protected Structure	Lhs009-005	9	Anglesea Terrace□□Greenore	15 Anglesea Terrace	House	End-of-terrace two-bay two-storey house with attic. built c. 1900. Gabled north bay to west elevation, canted bay window to ground floor west elevation, two-storey return to east.	13831037
Existing Protected Structure	Lhs009-006	9	1 Euston Street Greenore	Railway Houses	House	End-of-terrace two-bay two-storey former railway worker's house, built 1872, now in private domestic use. Extension to east. dark rock face limestone with brick dressings	13831024
Existing Protected Structure	Lhs009-007	9	2 Euston Street Greenore	Railway Houses	House	Terraced two-bay two-storey former railway worker's house, built 1872, now in private domestic use. Two-storey flat-roofed extension to east. dark rock face limestone with brick dressings	13831023
Existing Protected Structure	Lhs009-008	9	3 Euston Street Greenore	Railway Houses	House	Terraced two-bay two-storey former railway worker's house, built 1872, now in private domestic use. Two-storey flat-roofed extension to east. dark rock face limestone with brick dressings	13831022
Existing Protected Structure	Lhs009-009	9	4 Euston Street Greenore	Railway Houses	House	Terraced two-bay two-storey former railway worker's house, built 1872, now in private domestic use. dark rock face limestone with brick dressings	13831021
Existing Protected Structure	Lhs009-010	9	5 Euston Street Greenore	Railway Houses	House	Terraced two-bay two-storey former railway worker's house, built 1872, now in private domestic use. Single-storey extension to east. dark rock face limestone with brick dressings	13831020
Existing Protected Structure	Lhs009-011	9	6 Euston Street Greenore	Railway Houses	House	End-of-terrace two-bay two-storey former railway worker's house, built 1872, now in private domestic use. Extension to east. dark rock face limestone with brick dressings	13831019
Existing Protected Structure	Lhs009-012	9	7 Euston Street Greenore	Railway Houses	House	End-of-terrace two-bay two-storey former railway worker's house, built 1872, now in private domestic use. Extension east. dark rock face limestone with brick dressings	13831018
Existing Protected Structure	Lhs009-013	9	8 Euston Street Greenore	Railway Houses	House	Terraced two-bay two-storey former railway worker's house, built 1872, now in private domestic use dark rock face limestone with brick dressings	13831017
Existing Protected Structure	Lhs009-014	9	9 Euston Street Greenore	Railway Houses	House	Fronts directly onto street, garden to east with communal laneway giving access to gardens forming eastern boundary. dark rock face limestone with brick dressings	13831016

Draft Louth County Development Plan 2009 - 2015.
Record of Protected Structures.

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Existing Protected Structure	Lhs009-015	9	10 Euston Street Greenore	Railway Houses	House	Terraced two-bay two-storey former railway worker's house, built 1872, now in private domestic use. Single-storey extension to east. dark rock face limestone with brick dressings	13831015
Existing Protected Structure	Lhs009-016	9	11 Euston Street Greenore	Railway Houses	House	Terraced two-bay two-storey former railway worker's house, built 1872, now in private domestic use. Single-storey extension to east. dark rock face limestone with brick dressings	13831014
Existing Protected Structure	Lhs009-017	9	12 Euston Street Greenore	Railway Houses	House	Terraced two-bay two-storey former railway worker's house, built 1872, now in private domestic use. Single-storey extension to east. dark rock face limestone with brick dressings	13831013
Existing Protected Structure	Lhs009-018	9	13 Euston Street Greenore	Railway Houses	House	Terraced two-bay two-storey former railway worker's house, built 1872, now in private domestic use. Sun room extension to east. dark rock face limestone with brick dressings	13831012
Existing Protected Structure	Lhs009-019	9	14 Euston Street Greenore	Railway Houses	House	Fronts directly onto street, garden to east with communal laneway giving access to gardens forming eastern boundary. dark rock face limestone with brick dressings	13831011
Existing Protected Structure	Lhs009-020	9	15 Euston Street Greenore	Railway Houses	House	Terraced two-bay two-storey former railway worker's house, built 1872, now in private domestic use. Single-storey extension to east. dark rock face limestone with brick dressings	13831010
Existing Protected Structure	Lhs009-021	9	16 Euston Street Greenore	Railway Houses	House	Terraced two-bay two-storey former railway worker's house, built 1872, now in private domestic use. Single-storey flat-roofed extension to east. dark rock face limestone with brick dressings	13831009
Existing Protected Structure	Lhs009-022	9	17 Euston Street Greenore	Railway Houses	House	Terraced two-bay two-storey former railway worker's house, built 1872, now in private domestic use. Two-storey and lean-to extensions to east. dark rock face limestone with brick dressings	13831008
Existing Protected Structure	Lhs009-023	9	18 Euston Street Greenore	Railway Houses	House	End-of-terrace two-bay two-storey former railway worker's house, built 1872, now in private domestic use. Extension to east. dark rock face limestone with brick dressings	13831007
Existing Protected Structure	Lhs009-024	9	19 Euston Street Greenore	Railway Houses	House	Corner-sited semi-detached three-bay two-storey house, built c. 1870, as one of an unmatched pair. Lean-to extension to west. Dark rock face limestone with brick dressings	13831031
Existing Protected Structure	Lhs009-025	9	20 Euston Street Greenore	Railway Houses	House	Semi-detached two-bay two-storey house, built c. 1870, one of an unmatched pair. Two-storey return and lean-to extension to west. Dark rock face limestone with brick dressings	13831030
Existing Protected Structure	Lhs009-026	9	Euston Street Greenore	Euston Street Public House	Public House	Detached four-bay single-storey former school, dated 1873, now in use as a public house. Dark rock face limestone with brick dressings. Hipped entrance porch to east, suppressed-hipped porch to south containing former entrance to school.	13831029
Existing Protected Structure	Lhs009-027	9	Euston Street Greenore	Greenore Co-operative	Shop	Detached six-bay two-storey former co-op building, built c. 1880, now in use as shop and café with community hall to first floor. Gable-fronted single-bay two-storey with attic breakfront to north, recessed hipped roof section to south.	13831028

Draft Louth County Development Plan 2009 - 2015.
Record of Protected Structures.

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Existing Protected Structure	Lhs009-028	9	Greenore	No.1 The Bungalows	House	Semi-detached three-bay single-storey with attic. timber framed with red brick chimney. former railway manager's house, built c. 1895, now in use as private house. Gabled dormers to east and west, oriel window supported on timber brackets to east dormer.	13831004
Existing Protected Structure	Lhs009-029	9	Greenore	No. 2 The Bungalows	House	Semi-detached three-bay single-storey with attic. timber framed with red brick chimney. former railway manager's house, built c. 1895, now in use as private house. Gabled dormers to east and west, oriel window supported on timber brackets to east dormer.	13831003
Existing Protected Structure	Lhs009-030	9	Greenore	No. 3 The Bungalows 'The Pines'	House	Semi-detached three-bay single-storey with attic. timber framed with red brick chimney. former railway manager's house, built c. 1895, now in use as private house. Gabled dormers to east and west, oriel window supported on timber brackets to east dormer.	13831002
Existing Protected Structure	Lhs009-031	9	Greenore	No. 4 The Bungalows 'Four Winds'	House	Semi-detached three-bay single-storey with attic. timber framed with red brick chimney. former railway manager's house, built c. 1895, now in use as private house. Gabled dormers to east and west, oriel window supported on timber brackets to east dormer.	13831001
Existing Protected Structure	Lhs009-032	9	Whitestown	Whitestown Thatch	Thatched Cottage	Detached four-bay single-storey whitewashed thatched house, built c. 1780. Rectangular-plan, single-bay extension to north and outbuildings - OPW site 12	13900912
Existing Protected Structure	Lhs009-033	9	Whitestown	Whitestown Thatch	Thatched Cottage	Detached four-bay single-storey thatched house, built c. 1830. Rectangular-plan, porch with lean-to roof projecting from south elevation, extension to west. whitewashed with eyebrow windows and yard buildings - OPW site 13.	13900908
Proposed Protected Structure	LHS009-034	9	Cooley Villa, Euston Street	Cooley Villa	House	Semi-detached five-bay two-storey former railway manager's house, built c. 1890, now in use as private house. Two-storey block to west, box bay window to east, lean-to extension to west and single-storey extension to south, attached to house to north.	13831005
Proposed Protected Structure	LHS009-035	9	Seaview, Euston Street,	Seaview	House	Semi-detached five-bay two-storey former railway manager's house, built c. 1890, now in use as private house. Two-storey block to west, box bay window to east, lean-to extension to rear, attached to house to south.	13831006
Proposed Protected Structure	LHS009-036	9	Euston Street	Euston Street	House	Terrace of six single-bay two-storey former worker's houses, built c. 1860, now in private domestic use. Rectangular-plan, two-storey returns to west.	13831027
Proposed Protected Structure	LHS009-037	9	Anglesey /Anglesea Terrace	Anglesey /Angleseaterrace	House	Terrace of eight three-bay two-storey former workers' houses, built c. 1860, now in private domestic use. Variety of single- and two-storey extensions to east.	13831033
Proposed Protected Structure	LHS009-038	9	Coastguard Houses	Coastguard Houses	House	End-of-terrace two-bay two-storey former coastguard house, built c. 1870, now in private domestic use. Single-bay two-storey square block to north-west, oriel windows to north, east and west elevations; lean-to entrance porch to east	13831038
Proposed Protected Structure	LHS009-039	9	Coastguard Houses	Coastguard Houses	House	Terraced two-bay two-storey former coastguard house, built c. 1870, now in private domestic use. Rectangular-plan, lean-to porch to east.	13831039
Proposed Protected Structure	LHS009-040	9	Coastguard Houses	Coastguard Houses	House	Terraced two-bay two-storey former coastguard house, built c. 1870, now in private domestic use. Rectangular-plan, lean-to porch to east.	13831040
Proposed Protected Structure	LHS009-041	9	Coastguard Houses	Coastgurad Houses	House	Terraced two-bay two-storey former coastguard house, built c. 1870, now in private domestic use. Lean-to porch to east	13831041
Proposed Protected Structure	LHS009-042	9	Coastguard Houses	Coastguard Houses	House	End-of-terrace two-bay two-storey former coastguard house, built c. 1870, now in private domestic use. L-plan, lean-to porch to east, oriel window to south, extension to south.	13831042

Draft Louth County Development Plan 2009 - 2015.
Record of Protected Structures.


Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Proposed Protected Structure	LHS009-043	9	Greenore Lighthouse	Greenore Lighthouse & Lighthouse Keeper's Cottage	Lighthouse	Freestanding two-stage lighthouse, built 1830, now disused. Circular-plan, tapered profile.	13831043
Proposed Protected Structure	LHS009-044	9	Greenore Lighthouse Keeper's House	Greenore Lighthouse Keeper's House	Lighthouse Keeper's Cottage	Detached three-bay single-storey with attic former lighthouse keeper's house, built c. 1830, now disused. Rectangular-plan, porch with lean-to roof projecting from north and south elevations, lean-to flanking bay to east.	13831044
Proposed Protected Structure	LHS009-045	9	Avonmore House, Mullatee	Avonmore House	House	Detached three-bay two-storey house, built c. 1860.	13900902
Proposed Protected Structure	LHS009-046	9	Kincora, Muchgrange	Kincora	House	Detached three-bay two-storey house, built c. 1880, no longer in use. Rectangular-plan, projecting flat-roofed porch to west, three-bay two-storey in line extension to south, two-storey flat-roofed return to east c. 1950	13900903
Proposed Protected Structure	LHS009-047	9	Grange House, Millgrange	Grange House	House	Detached three-bay two-storey house, built c. 1800. Two-storey return and flat-roofed extension to south.	13900904
Proposed Protected Structure	LHS009-048	9	Saint Mary's Roman Catholic Church, Muchgrange	Saint Mary's Roman Catholic Church	Church	Freestanding Gothic Revival Roman Catholic church, dated 1865. Eight-bay side elevation to nave, lean-to side aisles to north and south, three-stage tower with broached ashlar spire to north-west, projecting gable-fronted entrance porch and three-bay single storey vestry to south aisle.	13900905
Proposed Protected Structure	LHS009-049	9	Whitestown		House	Attached three-bay single-storey house, built c. 1850. Rectangular-plan, in line extension to south, attached to house to north.	13900906
Proposed Protected Structure	LHS009-050	9	Whitestown		House	Detached three-bay two-storey house, built c. 1900. Rectangular-plan, gable-fronted porch projecting from south elevation, two-storey engaged section to north, single-storey extension to west.	13900907
Proposed Protected Structure	LHS009-051	9	Whitestown		House	Detached two-bay two-storey house, built c. 1850.	13900909
Proposed Protected Structure	LHS009-052	9	Lily Finnegan's, Whitestown	Lily Finnegan's	House	Detached five-bay two-storey house and public house, built c. 1830. Rectangular-plan comprising three-bay house with two-bay house to south, gabled entrance porch to south.	13900910
Proposed Protected Structure	LHS009-053	9	Water Pump, Whitestown	Water Pump	Waterpump	Freestanding cast-iron water pump, c. 1890, now disused. Cylindrical shaft with raised horizontal banding, fluted upper section with spout, hook for attaching bucket to spout, fluted domed cap with finial and 'cow-tail' handle. Set back from narrow village road.	13900911
Proposed Protected Structure	LHS009-054	9	Lime Kiln, Whitestown	Lime Kiln	Kiln	Freestanding lime kiln, built c. 1820, no longer in use. Square-plan. Uncoursed random rubble masonry. Round-arched opening to south elevation with machine-made red brick archivolt. Set into hillside, site now overgrown, overlooking sea to south and surrounded by farmland.	13900913

303591.9

281736.0

303591.9

291377.9

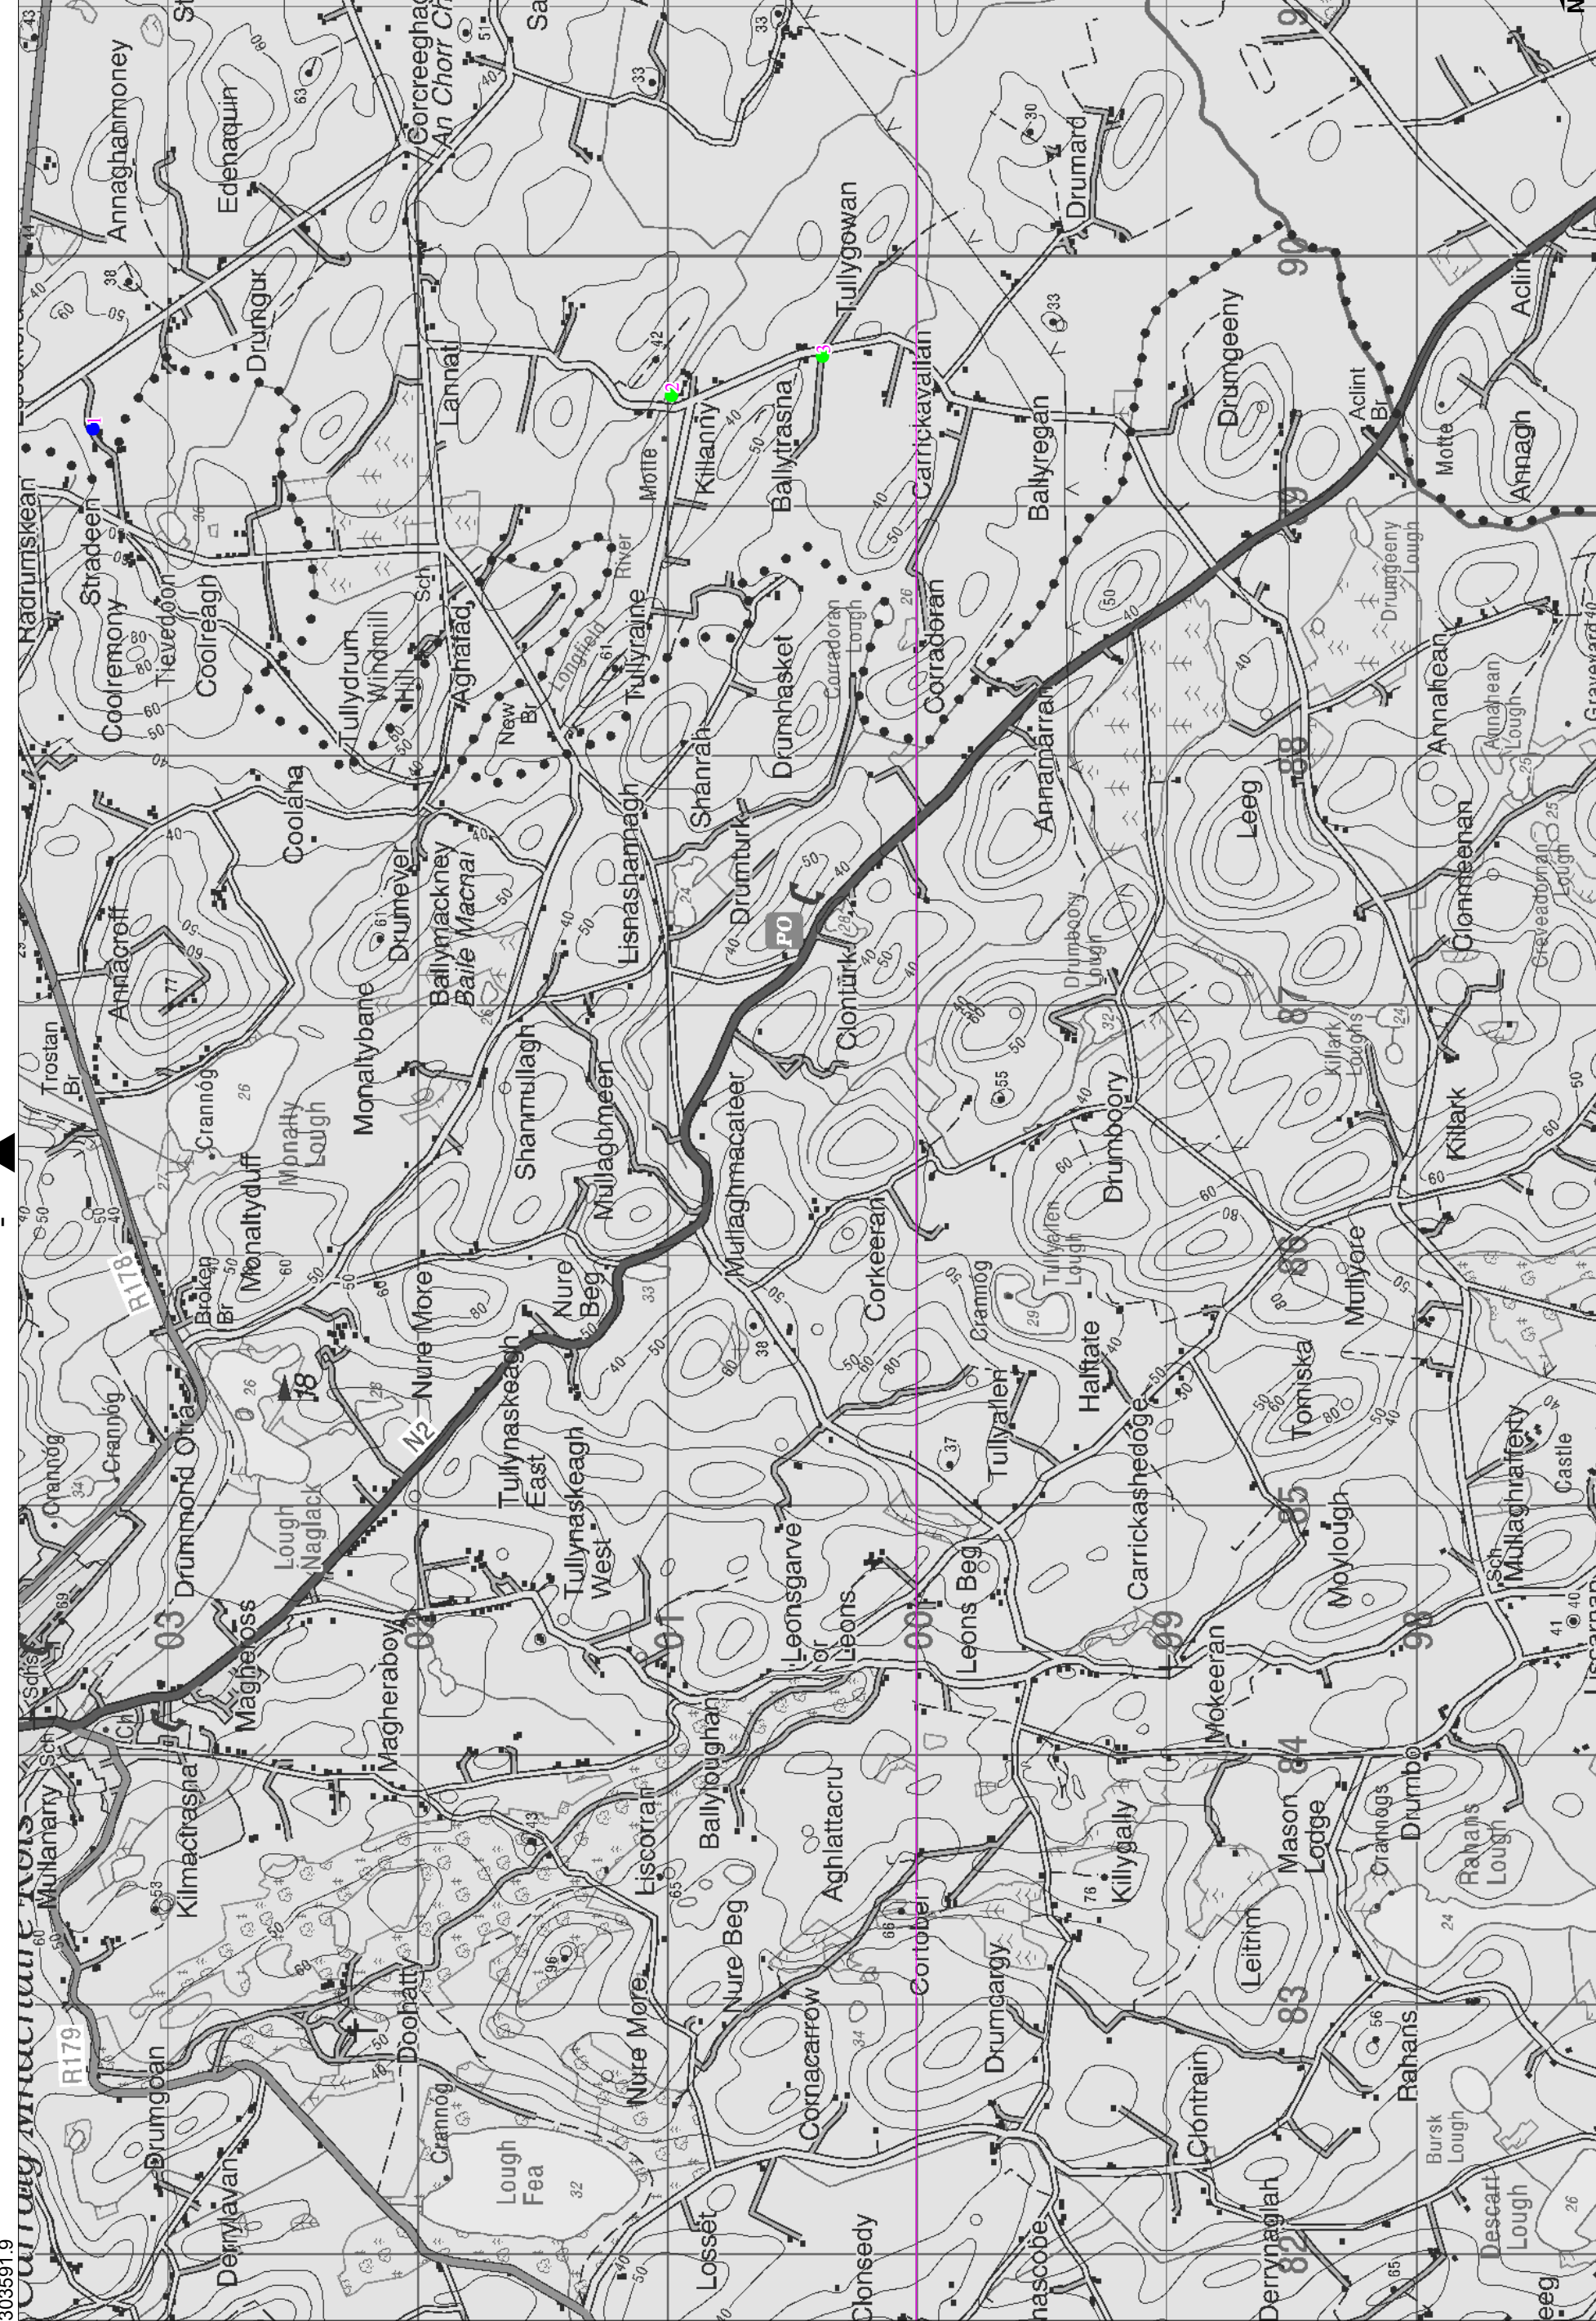

281736.0

297271.5

13

297271.5

291377.9



Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie


Note: Details shown on this map are for information purposes only.
Further details on any item should be clarified with Louth County Council.
The map has been produced by Louth County Council with available Local Authority and Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number 2009/30/CCMA/LouthLocalAuthorities.

Not to scale when printed A3 Landscape

Louth County Council Record of Protected Structures Sheet No 10

- Protected Structure
- Proposed Protected Structure
- Proposed to be deleted from Register of Protected Structures
- All Protected Structures within this boundary are in the Dundalk & Environs Plan

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Existing Protected Structure	Lhs010-001	10	Essexford	Essexwood (Formerly Kilannev Glebe)	House	Detached three-bay two-storey former rectory, built c. 1780, now private house. Gable-fronted entrance breakfront and three-bay two-storey wing to west.	13901001
Proposed Protected Structure	LHS010-002	10	Killanny		Water Mill	Detached three-storey five-bay former corn mill, built c. 1810, extension to west c. 1950, now in use as outbuilding. Pitched slate roof, clay ridge tiles, brick header corbelled eaves course. Random rubble uncoursed stone walling, roughly dressed quoins.	13901002
Proposed Protected Structure	LHS010-003	10	Louth		House	Detached three-bay single-storey house, built c. 1820, abutting two-bay two-storey block to north and single-bay two-storey stone outbuildings to south-east.	13901003

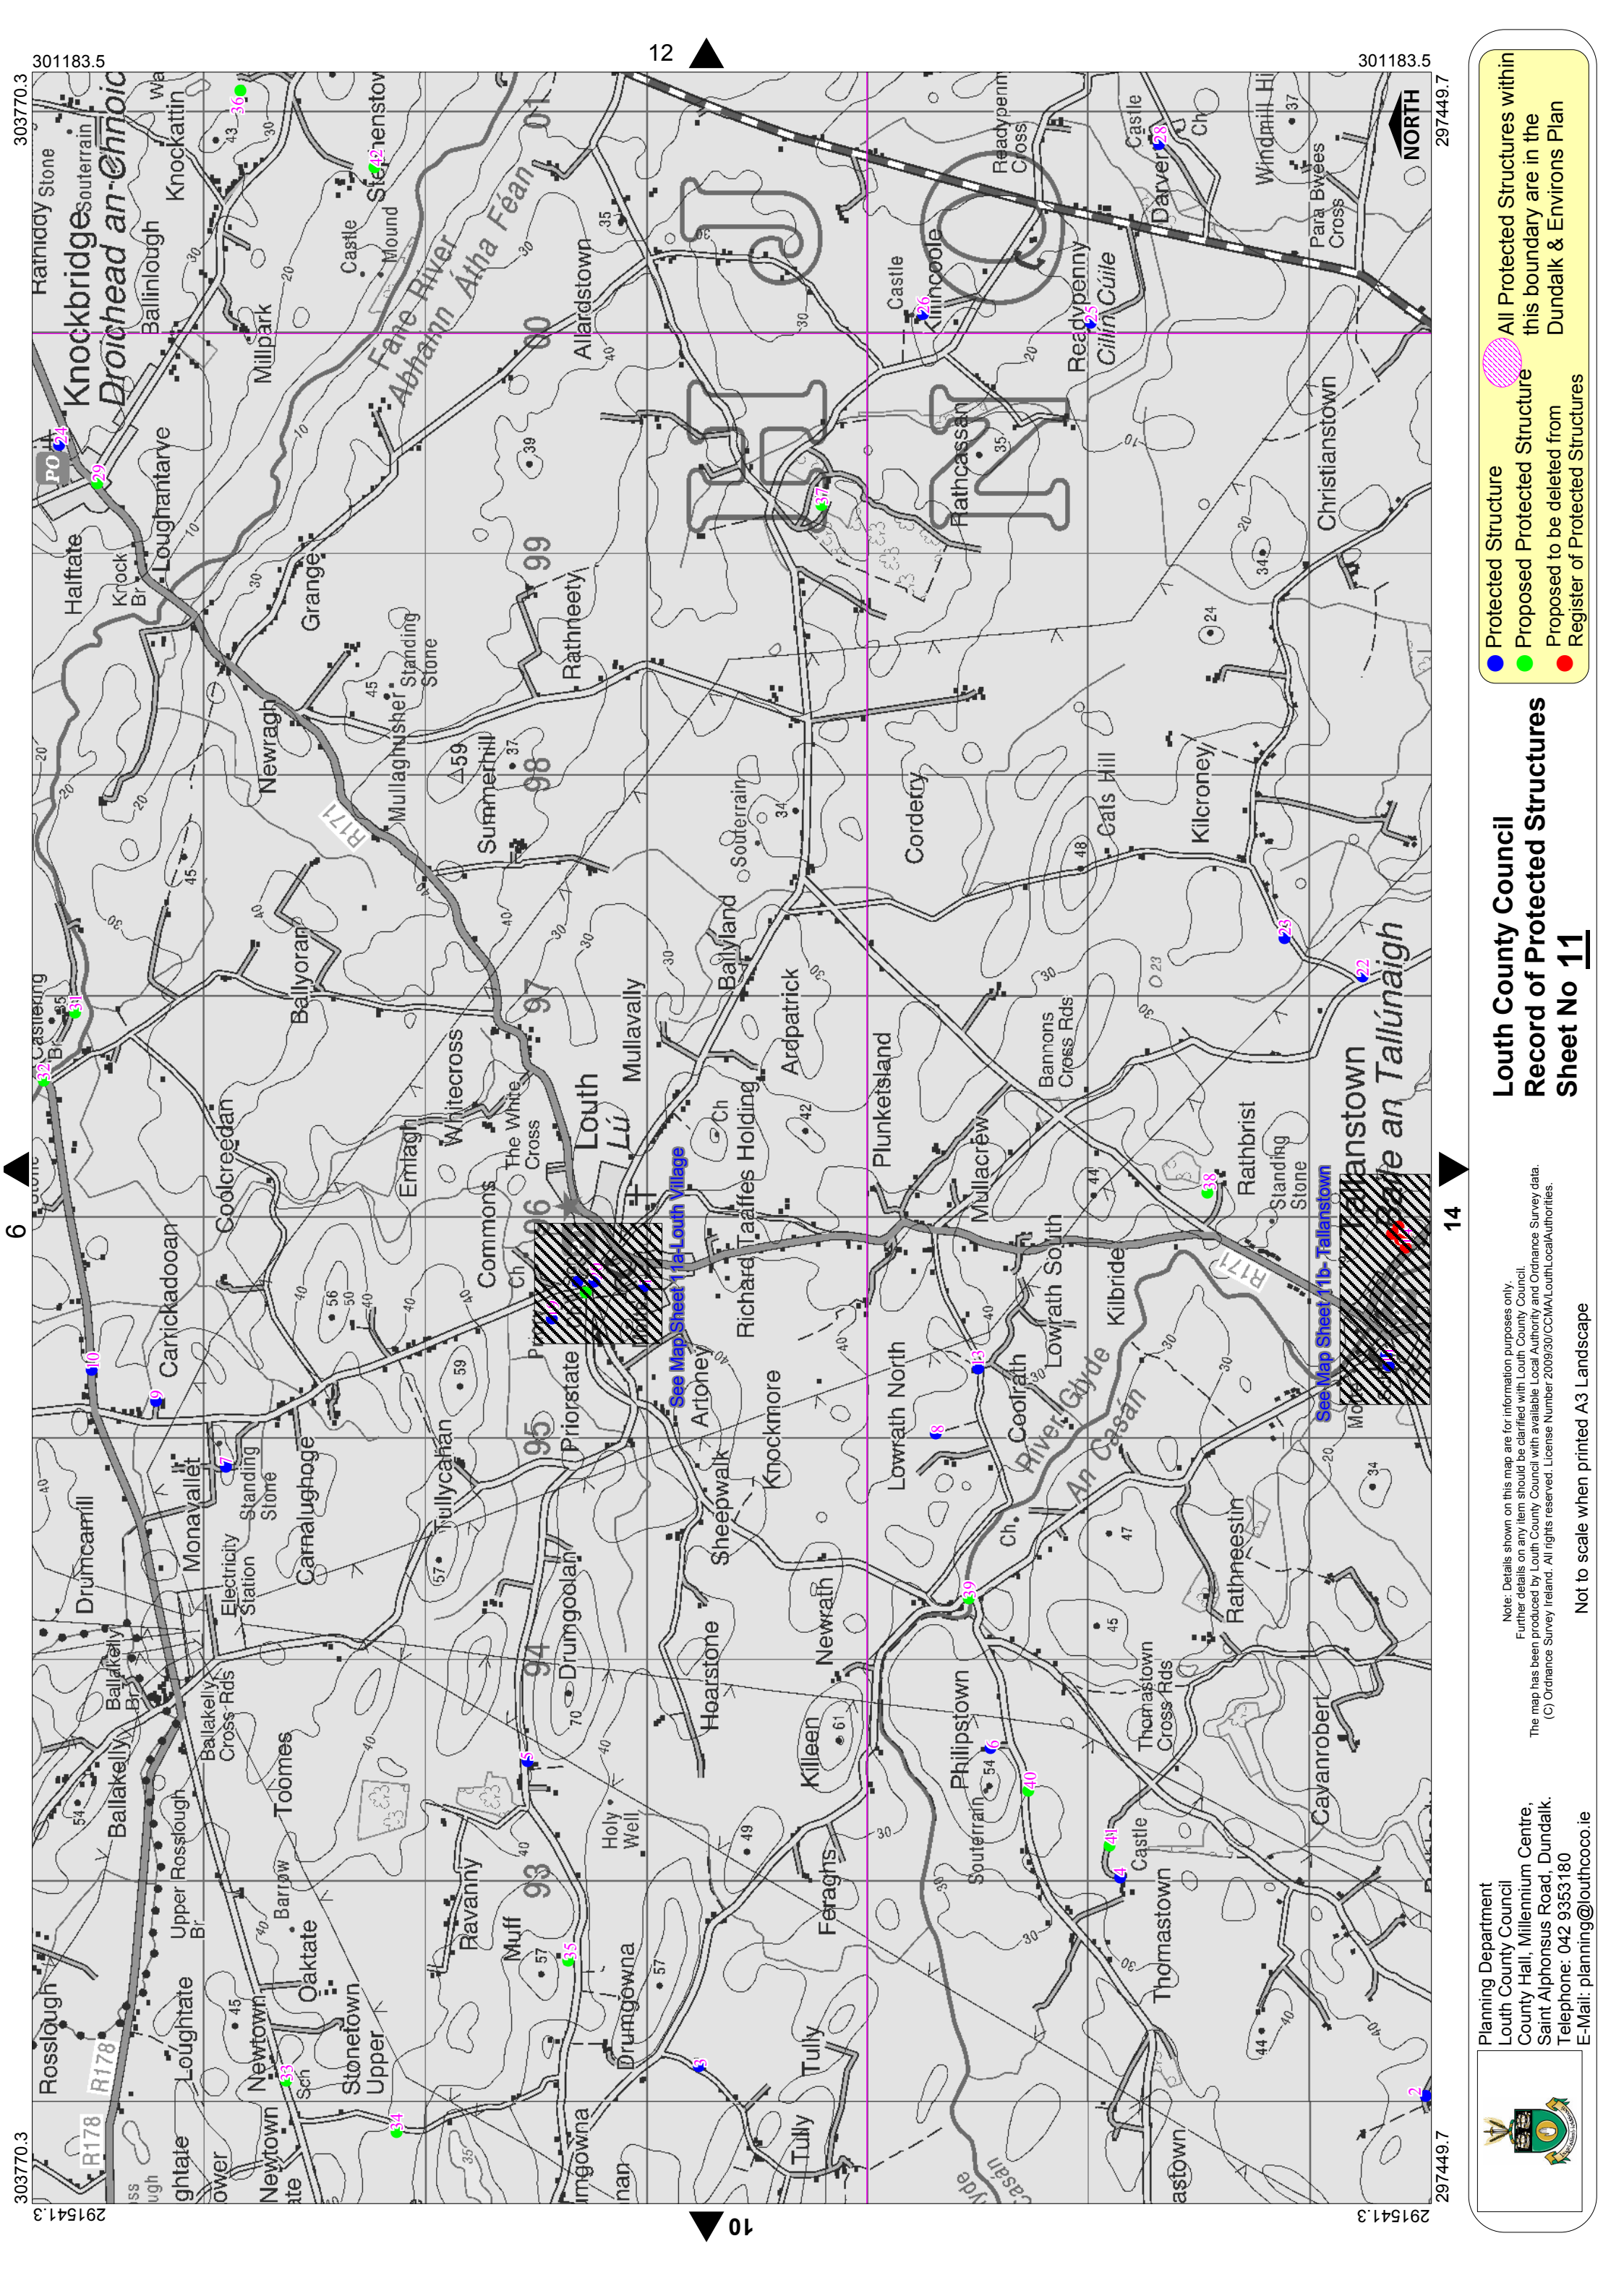


Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie


Note: Details shown on this map are for information purposes only.
Further details on any item should be clarified with Louth County Council.
The map has been produced by Louth County Council with available Local Authority and Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number 2009/30/CCMA/LouthLocalAuthorities.

Louth County Council Record of Protected Structures Sheet No 11

- Protected Structure
- Proposed Protected Structure
- Proposed to be deleted from Register of Protected Structures
- All Protected Structures within this boundary are in the Dundalk & Environs Plan

Not to scale when printed A3 Landscape

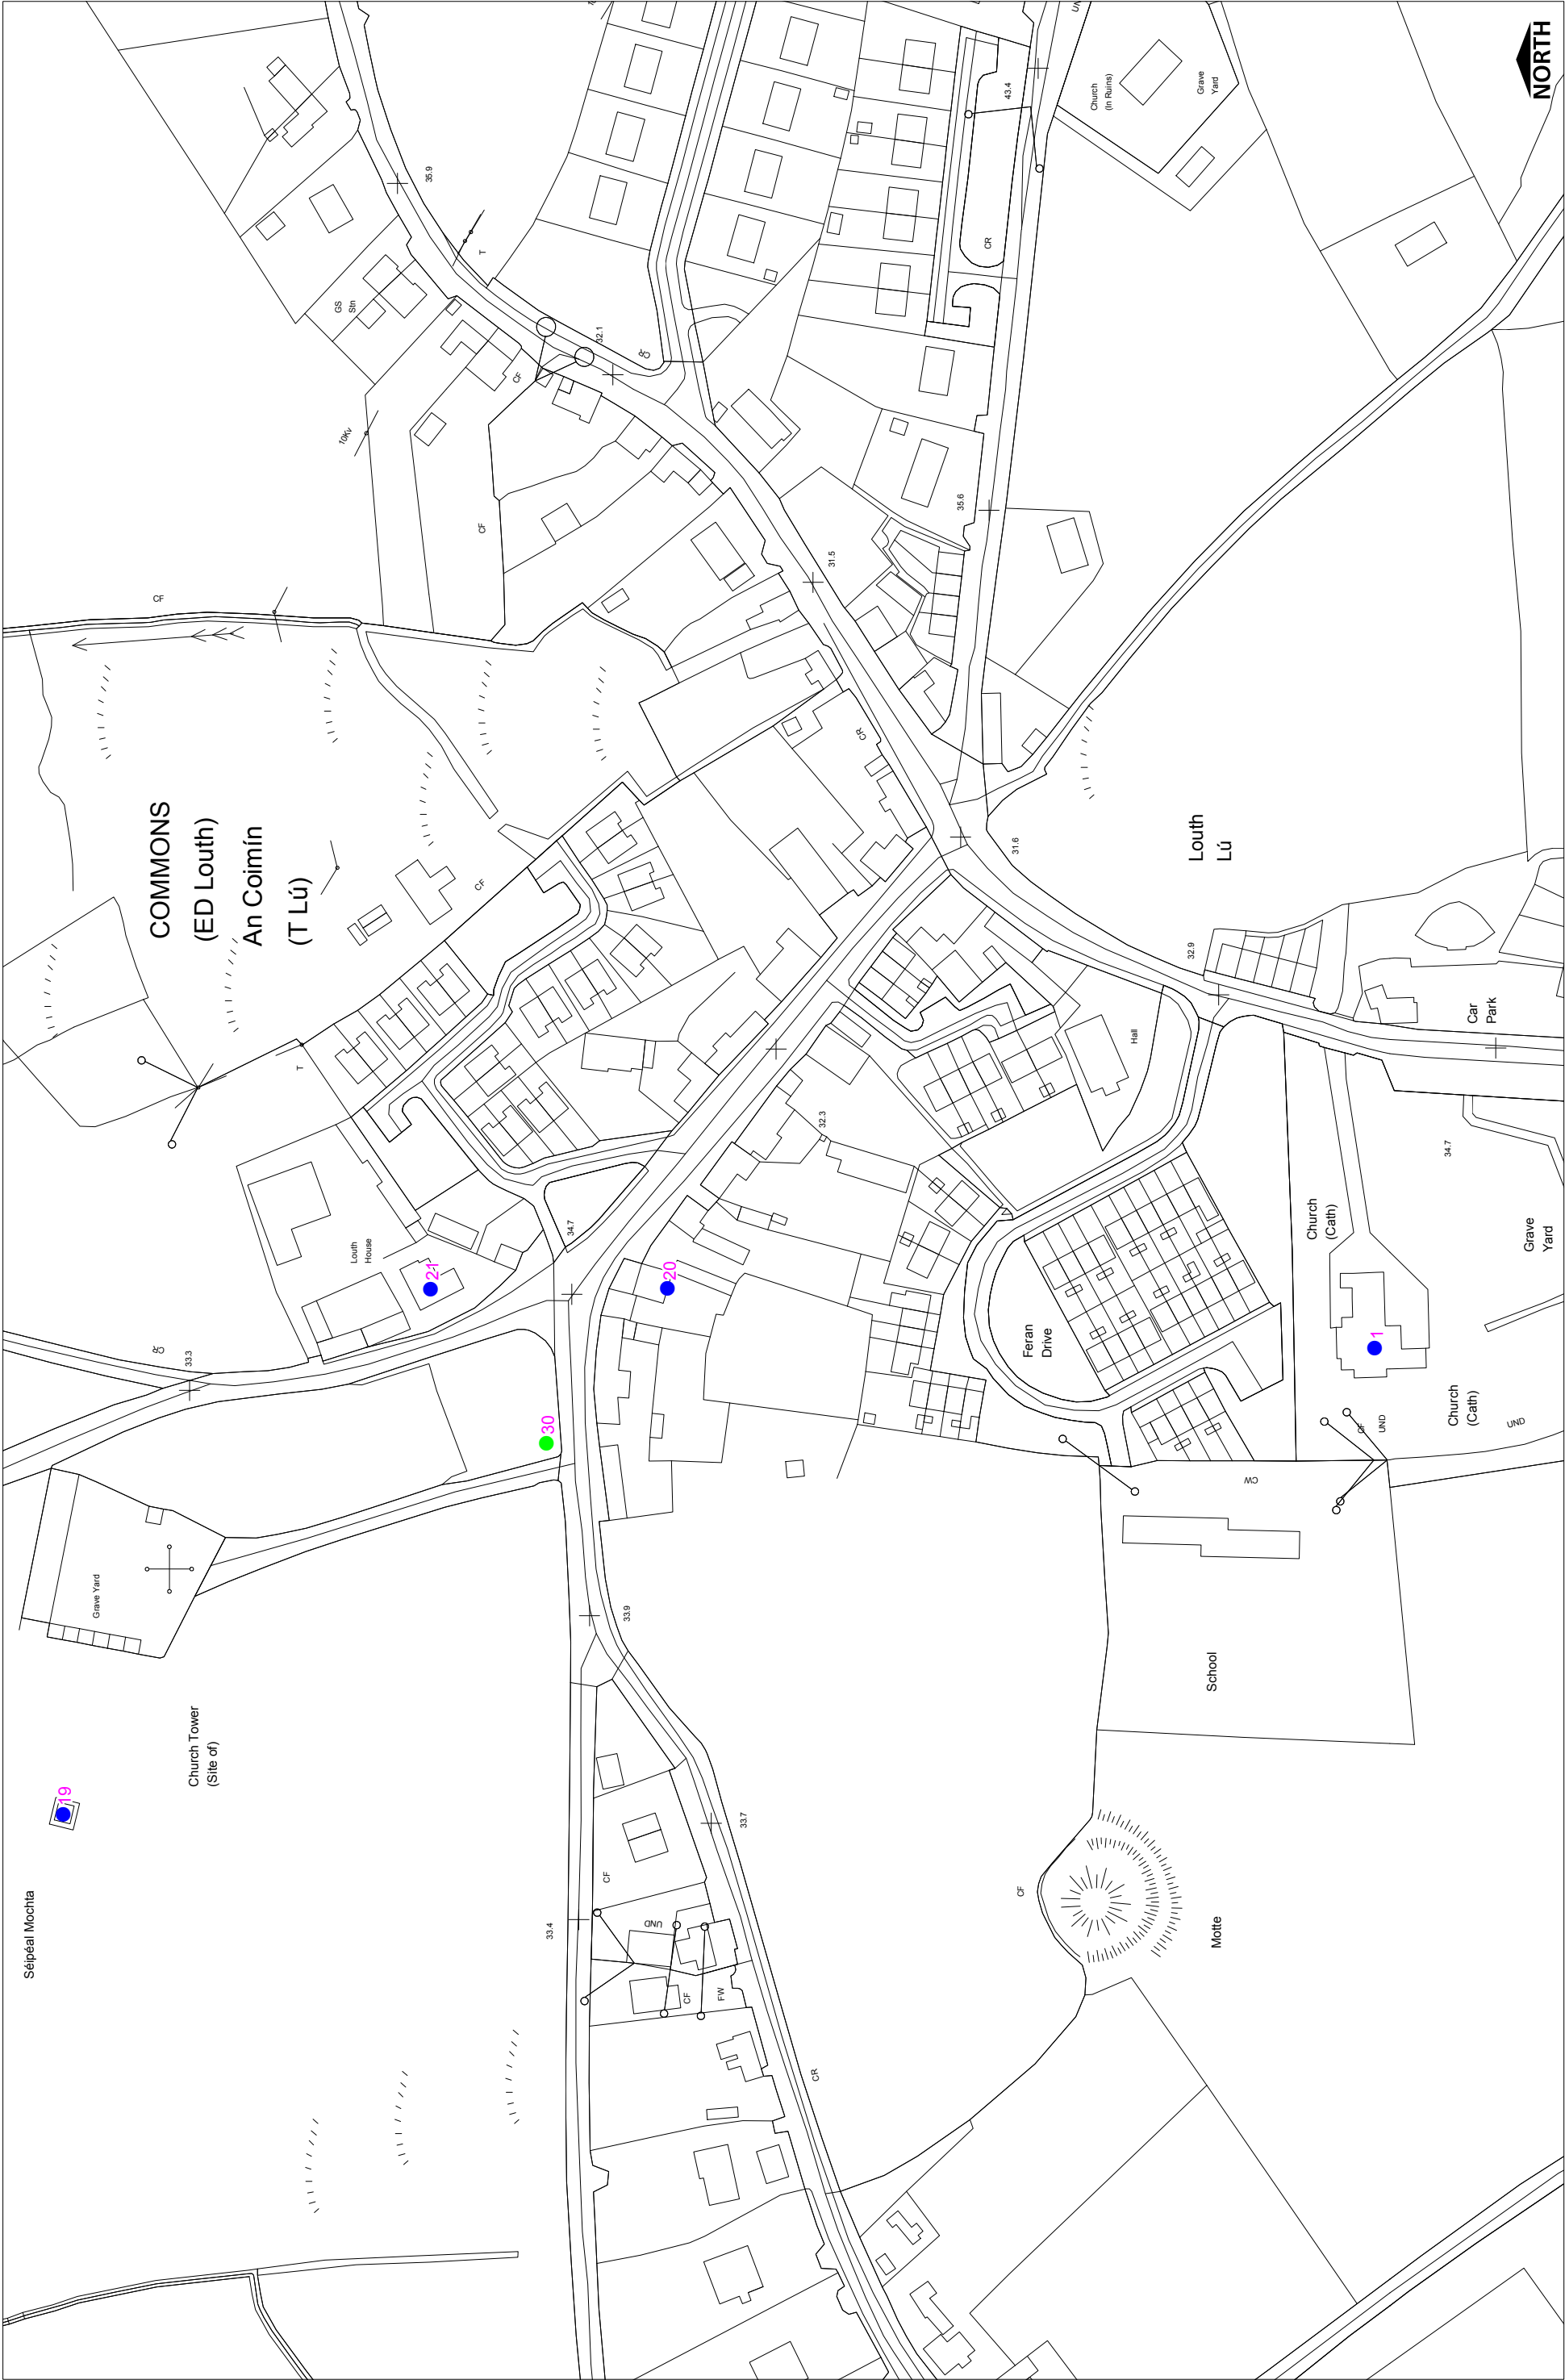

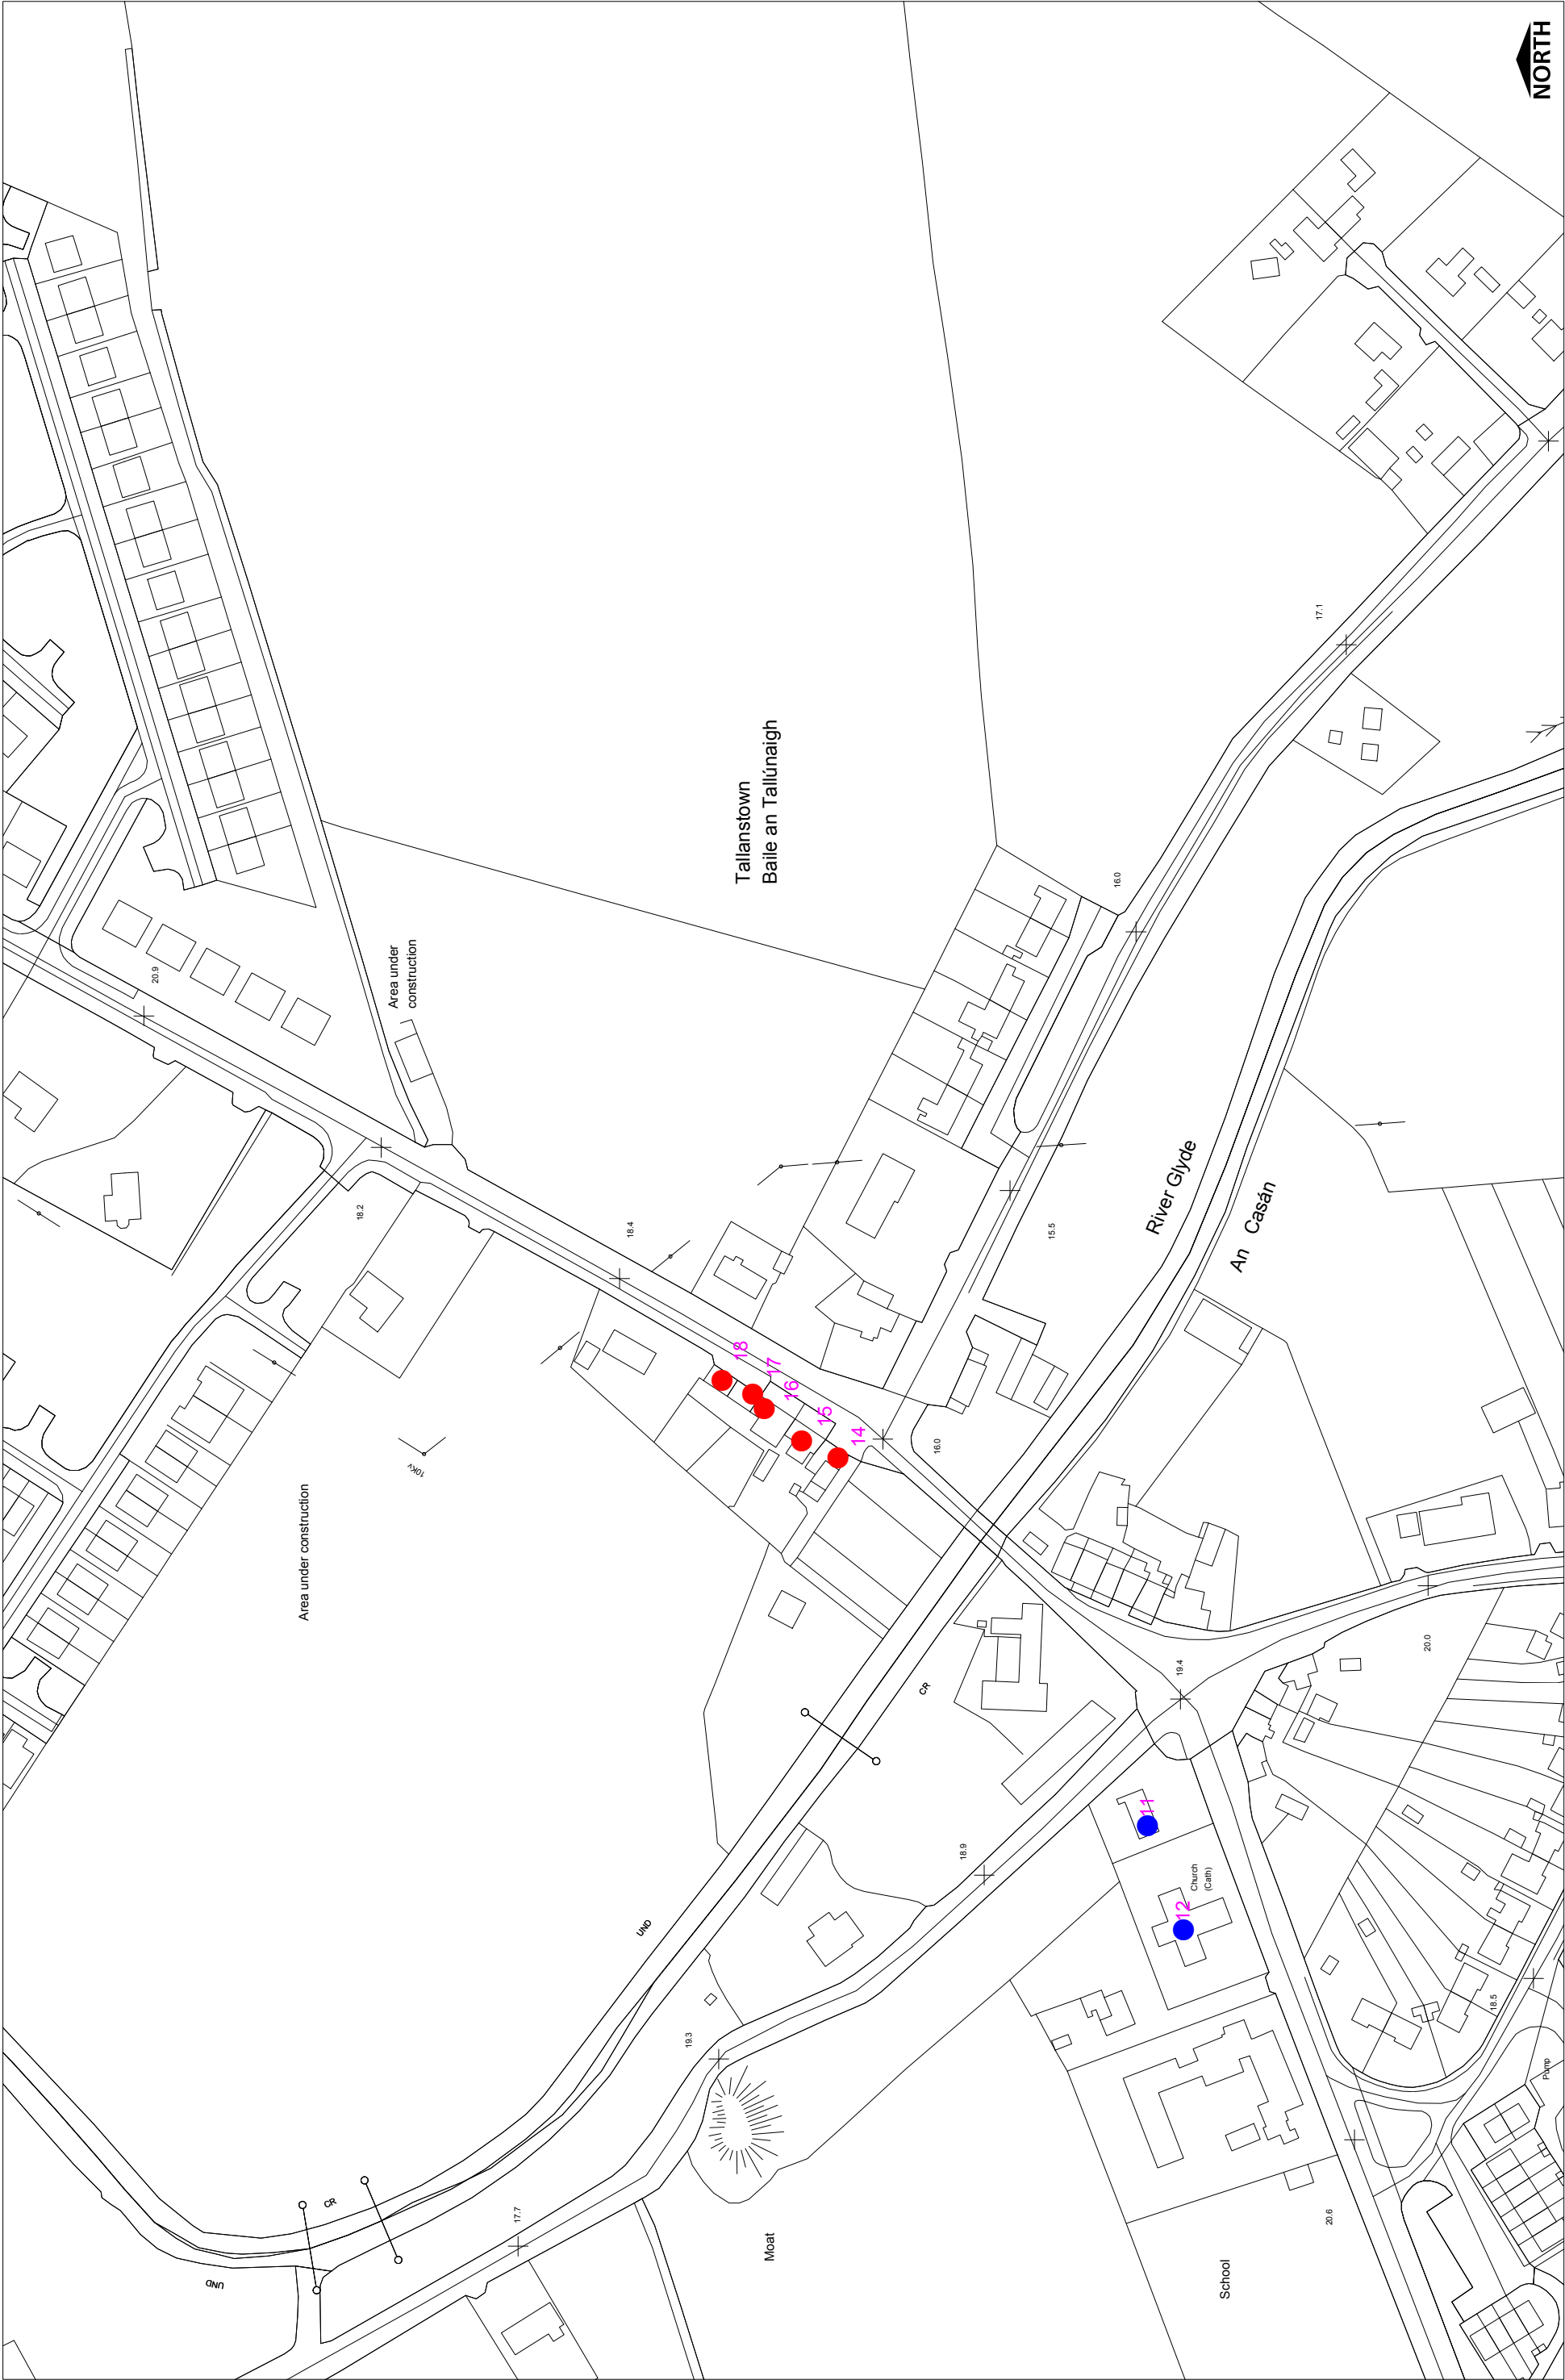


Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Existing Protected Structure	Lhs011-001	11	Richard Taaffes Holding	Church Of The Immaculate Conception	Church	1890 – 1904, Freestanding Roman Catholic church, by W.H.Byrne. A large Gothic church with broach spire. Cruciform-plan, eight-bays to nave, three-stage tower with octagonal broached spire to north-east corner, sacristy to south-west, projecting porches to north and south transepts.	13832001
Existing Protected Structure	Lhs011-002	11	Arthurstown	Arthurstown Thatch	Thatched Cottage	four-bay single storey thatched cottage with ornate ridge board, brick chimneys and replacement windows -OPW site 17	
Existing Protected Structure	Lhs011-003	11	Tully	Tully Thatch	Thatched Cottage	Detached five-bay single-storey straw thatched dwelling, built c. 1830. Straw thatched roof, metal ridge, red brick chimneystack, whitewashed stone/clay wall - OPW site 14	13901108
Existing Protected Structure	Lhs011-004	11	Thomastown	Knock Abbey (Thomastown Castle)	Towerhouse	Six-bay three-storey house, dated 1754. Attached at south to medieval tower house, built c. 1400, burnt and rebuilt 1923. Recently renovated. Three-stage tower buttressed at west corner, crenellated parapet. Extended to south to designs by William Caldbec	13901130
Existing Protected Structure	Lhs011-005	11	Drumgoolan	Drumgoolan Thatch	Thatched Cottage	Detached five-bay single storey whitewashed thatched cottage built c. 1820. Pitched straw thatched roof, rendered central chimneystackLime-washed rendered walling with replacement windows - OPW site 15	13901110
Existing Protected Structure	Lhs011-006	11	Philipstown	Philipstown Thatch	Thatched Cottage	Three-bay two-storey stone walled whitewashed thatched house with one-bay two-storey slated ends - OPW site 16	13901127
Existing Protected Structure	Lhs011-007	11	Monvallet	Monvallet House	House	Detached three-bay two-storey Italianate house, built 1872, over sunken basement, with square-plan projecting entrance porch to west façade.	13901105
Existing Protected Structure	Lhs011-008	11	Lowrath North	Lowrath North Thatch	Thatched Cottage	Detached four-bay single-storey whitewashed thatched house, built c. 1780, with replacement windows and three-bay single-storey extension to west - OPW site 20	13901125
Existing Protected Structure	Lhs011-009	11	Carrickadoan	Carrickadoan Thatch	Thatched Cottage	Detached four-bay single-storey with attic house, built c. 1820. Rectangular block, flat-roofed extensions to north and east. -OPW site 19	13901104
Existing Protected Structure	Lhs011-010	11	Chanonrock	Chanonrock Thatch	Thatched Cottage	Detached five-bay single-storey whitewashed thatched house, built c. 1800, with lean-to to north. Three ranges of outbuildings to north, south and east.	13901103
Existing Protected Structure	Lhs011-011	11	Louth Hall	National School	School	Detached five-bay two-storey former school, built 1840, now a community hall. Rectangular block, open bed pedimented breakfront to south, extension to north.	13901122
Existing Protected Structure	Lhs011-012	11	Louth Hall	St Peter's Catholic Church	Church	Freestanding Roman Catholic church, built c. 1780, originally single-cell, altered to T-plan barn church and Gothic frontispiece added, c. 1830. Pinnacled front incl railing and piers. Sacristy to north.	13901123
Existing Protected Structure	Lhs011-013	11	Lowrath North	Lowrath North Thatch	Thatched Cottage	Detached three-bay single-storey whitewashed straw-thatched house, built c. 1820. Extension comprised two-bay two-storey house with slate-roof c. 1900 to east. Square-headed projecting porch, c. 1930 to south elevation and range of single-storey outbuildings c. 1900-1950 to west.	13901124
Proposed To Be Deleted	Lhs011-014	11	Rathbrist	Rathbrist Cottages 1	Terraced House	tudor revival, rendered with wide eaves and brick stacks	
Proposed To Be Deleted	Lhs011-015	11	Rathbrist	Rathbrist Cottages 2	Terraced House	tudor revival, rendered with wide eaves and brick stacks	

Draft Louth County Development Plan 2009 - 2015.
Record of Protected Structures.

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Proposed To Be Deleted	Lhs011-016	11	Rathbrist	Rathbrist Cottages 3	Terraced House	tudor revival, rendered with wide eaves and brick stacks	
Proposed To Be Deleted	Lhs011-017	11	Rathbrist	Rathbrist Cottages 4	Terraced House	tudor revival, rendered with wide eaves and brick stacks	
Proposed To Be Deleted	Lhs011-018	11	Rathbrist	Rathbrist Cottages 5	Terraced House	tudor revival, rendered with wide eaves and brick stacks	
Existing Protected Structure	Lhs011-019	11	Priorstate	St. Mochta's House And St Mary's Priory	Church	Early christian Oratory, a single celled church with croft in the roof, ruins of C12 monastery	
Existing Protected Structure	Lhs011-020	11	Richard Taaffes Holding	Two-storey cottage	Cottage	Detached three-bay two-storey house, built c. 1880. Shallow hipped roof and plain round fanlight over door. Square-plan, return to south	13832002
Existing Protected Structure	Lhs011-021	11	Richard Taaffes Holding	Two-storey house	House	Detached three-bay two-storey cottage, built c. 1860.bull's eye window, lime rendered and whitewashed. L-plan, extension to south-east c. 1930, single-storey porch to east c. 1960	13832004
Existing Protected Structure	Lhs011-022	11	Kilcroney	Kilcroney Thatch	Thatched Cottage	Detached four-bay single-storey with attic thatched dwelling, built c. 1820. Reed thatched roof, whitewashed, rendered central chimneystack. - OPW site 24	13901120
Existing Protected Structure	Lhs011-023	11	Kilcroney	Kilcroney Thatch	Thatched Cottage	Detached five-bay single-storey thatched house with stone/clay walled whitewash, built c. 1800. Linear on plan, pitched corrugated-iron extension to west elevation, various attached corrugated-iron lean-to outbuildings to east, single-pitch corrugated-iron	13901119
Existing Protected Structure	Lhs011-024	11	Knockatavy	Catholic Church	Church	c. 1830, masive rectangular tower in the manner of a Presbyterian church, remodelled 1870, refitted 1937, incl gates and railings	
Existing Protected Structure	Lhs011-025	11	Killincoole	Readypenny Glebe	Gate Lodge	Detached three-bay two-storey over basement former rectory, built c. 1800. Now in private domestic use. Rectangular block, projecting central gabled bay to east, bathroom added to first floor to west c. 1890, supported on cast-iron columns.	13901117
Existing Protected Structure	Lhs011-026	11	Killincoole	Killincoole House	Towerhouse	Late medieval tower house with curved corners and detached three-bay two-storey house, built c. 1820. Rectangular-plan with double pile return to rear (west) elevation with various lean-to and pitched extensions.	13901116
Existing Protected Structure	Lhs011-027	11	Rathiddy	Cucuhulain's Standing Stone	Standing Stone		
Existing Protected Structure	Lhs011-028	11	Darver	Darver Castle	Towerhouse	Detached four-storey former tower house, built c. 1500, now in use as house. Square-plan with projecting round tower at north-east angle and square tower at north-west angle, adjoining two-storey dwelling house, built c. 1820, to east, various attached outbuildings and stables.	13901118
Proposed Protected Structure	Lhs011-029	11	Loughantarve	Farmhouse	Farm House	Detached five-bay two-storey house, built c. 1840, with three chimneystacks, single-storey lean-to bay to west, three-bay two-storey outbuilding attached to east and single-storey gable-fronted rear entrance porch to north, farmyard to rear (north) with outbuildings.	13901111
Proposed Protected Structure	LHS011-030	10	Priorstate	Weighbridge	Waterpump	Freestanding cast-iron weighing scales, weigh bridge and water pump, erected c. 1880, now disused. Scales comprising fluted cylindrical shaft; straight arm handle held in place by latch; incised scale. Adjacent cast-iron weigh bridge set within cast-iron	13832003

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Proposed Protected Structure	LHS011-031	10	Castlering House	Castlering House	House	Detached three-bay two-storey house, dated 1857. Built on T-plan with two-storey return to rear	13901101
Proposed Protected Structure	LHS011-032	11	Castlering Bridge, Chanonrock	Castlering Bridge	Road Bridge	Four-arch rubble masonry road bridge with round-arched openings and having V-cutwaters to both east and west elevations, built c. 1810. Parapet rebuilt and repaired in concrete c. 1970.	13901102
Proposed Protected Structure	LHS011-033	11	Stonetown National School, Newtown	Stonetown National School	School	Detached nine-bay single-storey school, built 1952. Rectangular block, single-storey flat-roofed wrap-around corridor and toilet block to north, east and west, water tower to north-east.	13901106
Proposed Protected Structure	LHS011-034	11	Saint Mary's Roman Catholic Church, Rootate	Saint Mary's Roman Catholic Church	Church	Detached T-plan Roman Catholic church, dated 1837 and built by Rev. P Banan. Two-bay sacristy to west, entrance porch to east, belcote over entrance gable	13901107
Proposed Protected Structure	LHS011-035	11	Pakenham Hall, Muff	Pakenham Hall	House	Detached three-bay two-storey house, built 1806. Pitched slate roof, brick chimneystacks, rendered corbel course to eaves, cast-iron rainwater goods	13901109
Proposed Protected Structure	LHS011-036	11	Burn's Cottage / Lakeview Cottage	Burn's Cottage / Lakeview Cottage	House	Detached five-bay single-storey house, built c. 1800.	13901113
Proposed Protected Structure	LHS011-037	11	Corderry House	Corderry House	Country House	Detached three-bay single-storey over basement house, built c. 1820. Return to north, porch to south.	13901115
Proposed Protected Structure	LHS011-038	11	Rathbrist House	Rathbrist House	Country House	Detached three-bay two-storey over basement house, built c. 1870, with pedimented breakfront and porch, two-bay two-storey wing to east	13901121
Proposed Protected Structure	LHS011-039	11	Lowrath North	Bridge	Road Bridge	Single-span limestone road-over-river bridge, built c. 1830. Coursed limestone spandrels, parapet, dressed limestone voussoirs, flat coping stones to parapets, cut limestone piers. Bitumen double carriageway. Spans River Glyde. Located beside ruined mill to west.	13901126
Proposed Protected Structure	LHS011-040	11	Knock Abbey Gate Lodge, Thomastown	Knock Abbey Gate Lodge	Gate Lodge	Detached two-bay single-storey to north, basement to south and west former gate lodge, built c. 1860, now in private domestic use. L-plan	13901128
Proposed Protected Structure	LHS011-041	11	Knock Abbey Gate Lodge, Thomastown	Knock Abbey Gate Lodge	Gate Lodge	Detached five-bay single-storey former gate lodge, built c. 1850. Now a private house. Rectangular block, gable-fronted porch to north, return to south.	13901129
Proposed Protected Structure	LHS011-042	11	Stephenstown House	Stephenstown House	Country House	Detached five-bay two-storey over basement house, built c. 1790, now in ruinous condition, single-storey addition to south c. 1820, porch to entrance front, c. 1840.	13901114

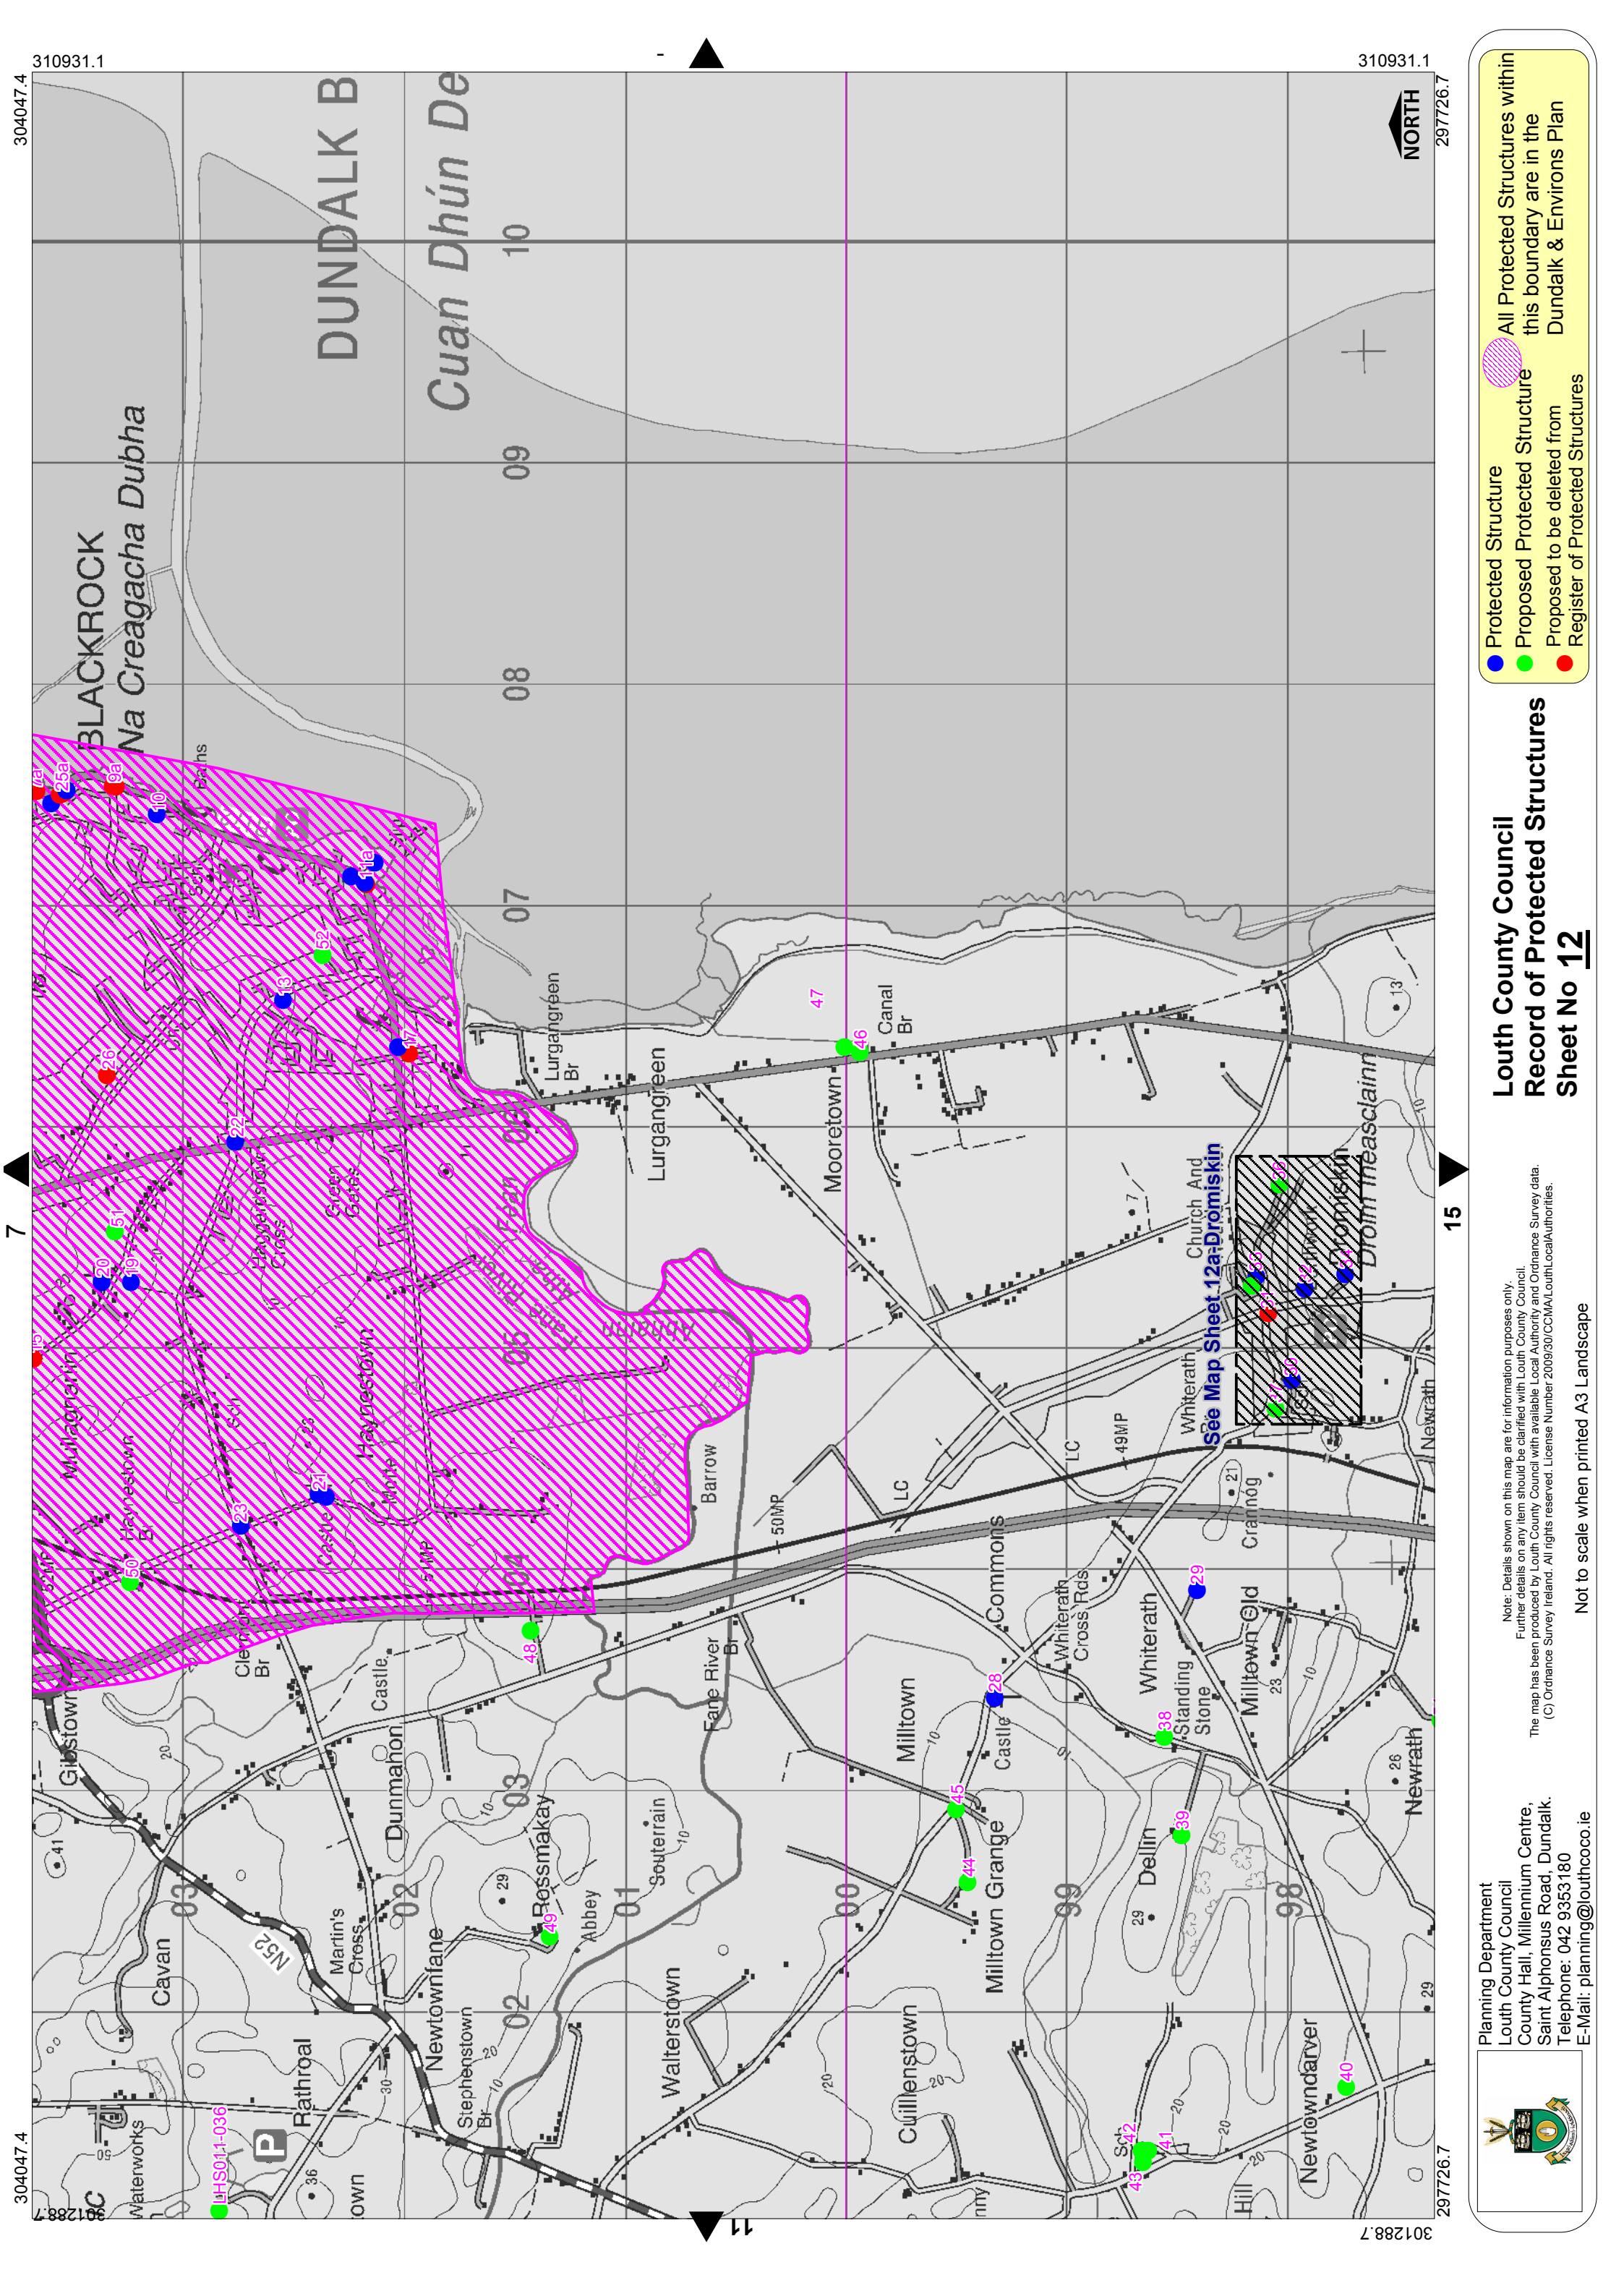


Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie

Note: Details shown on this map are for information purposes only.
Further details on any item should be clarified with Louth County Council.
The map has been produced by Louth County Council with available Local Authority and Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number 2009/30/CCMA/LouthLocalAuthorities.
Not to scale when printed A3 Landscape

Louth County Council Record of Protected Structures Sheet No 12

- Protected Structure
- Proposed Protected Structure
- Proposed to be deleted from Register of Protected Structures
- All Protected Structures within this boundary are in the Dundalk & Environs Plan

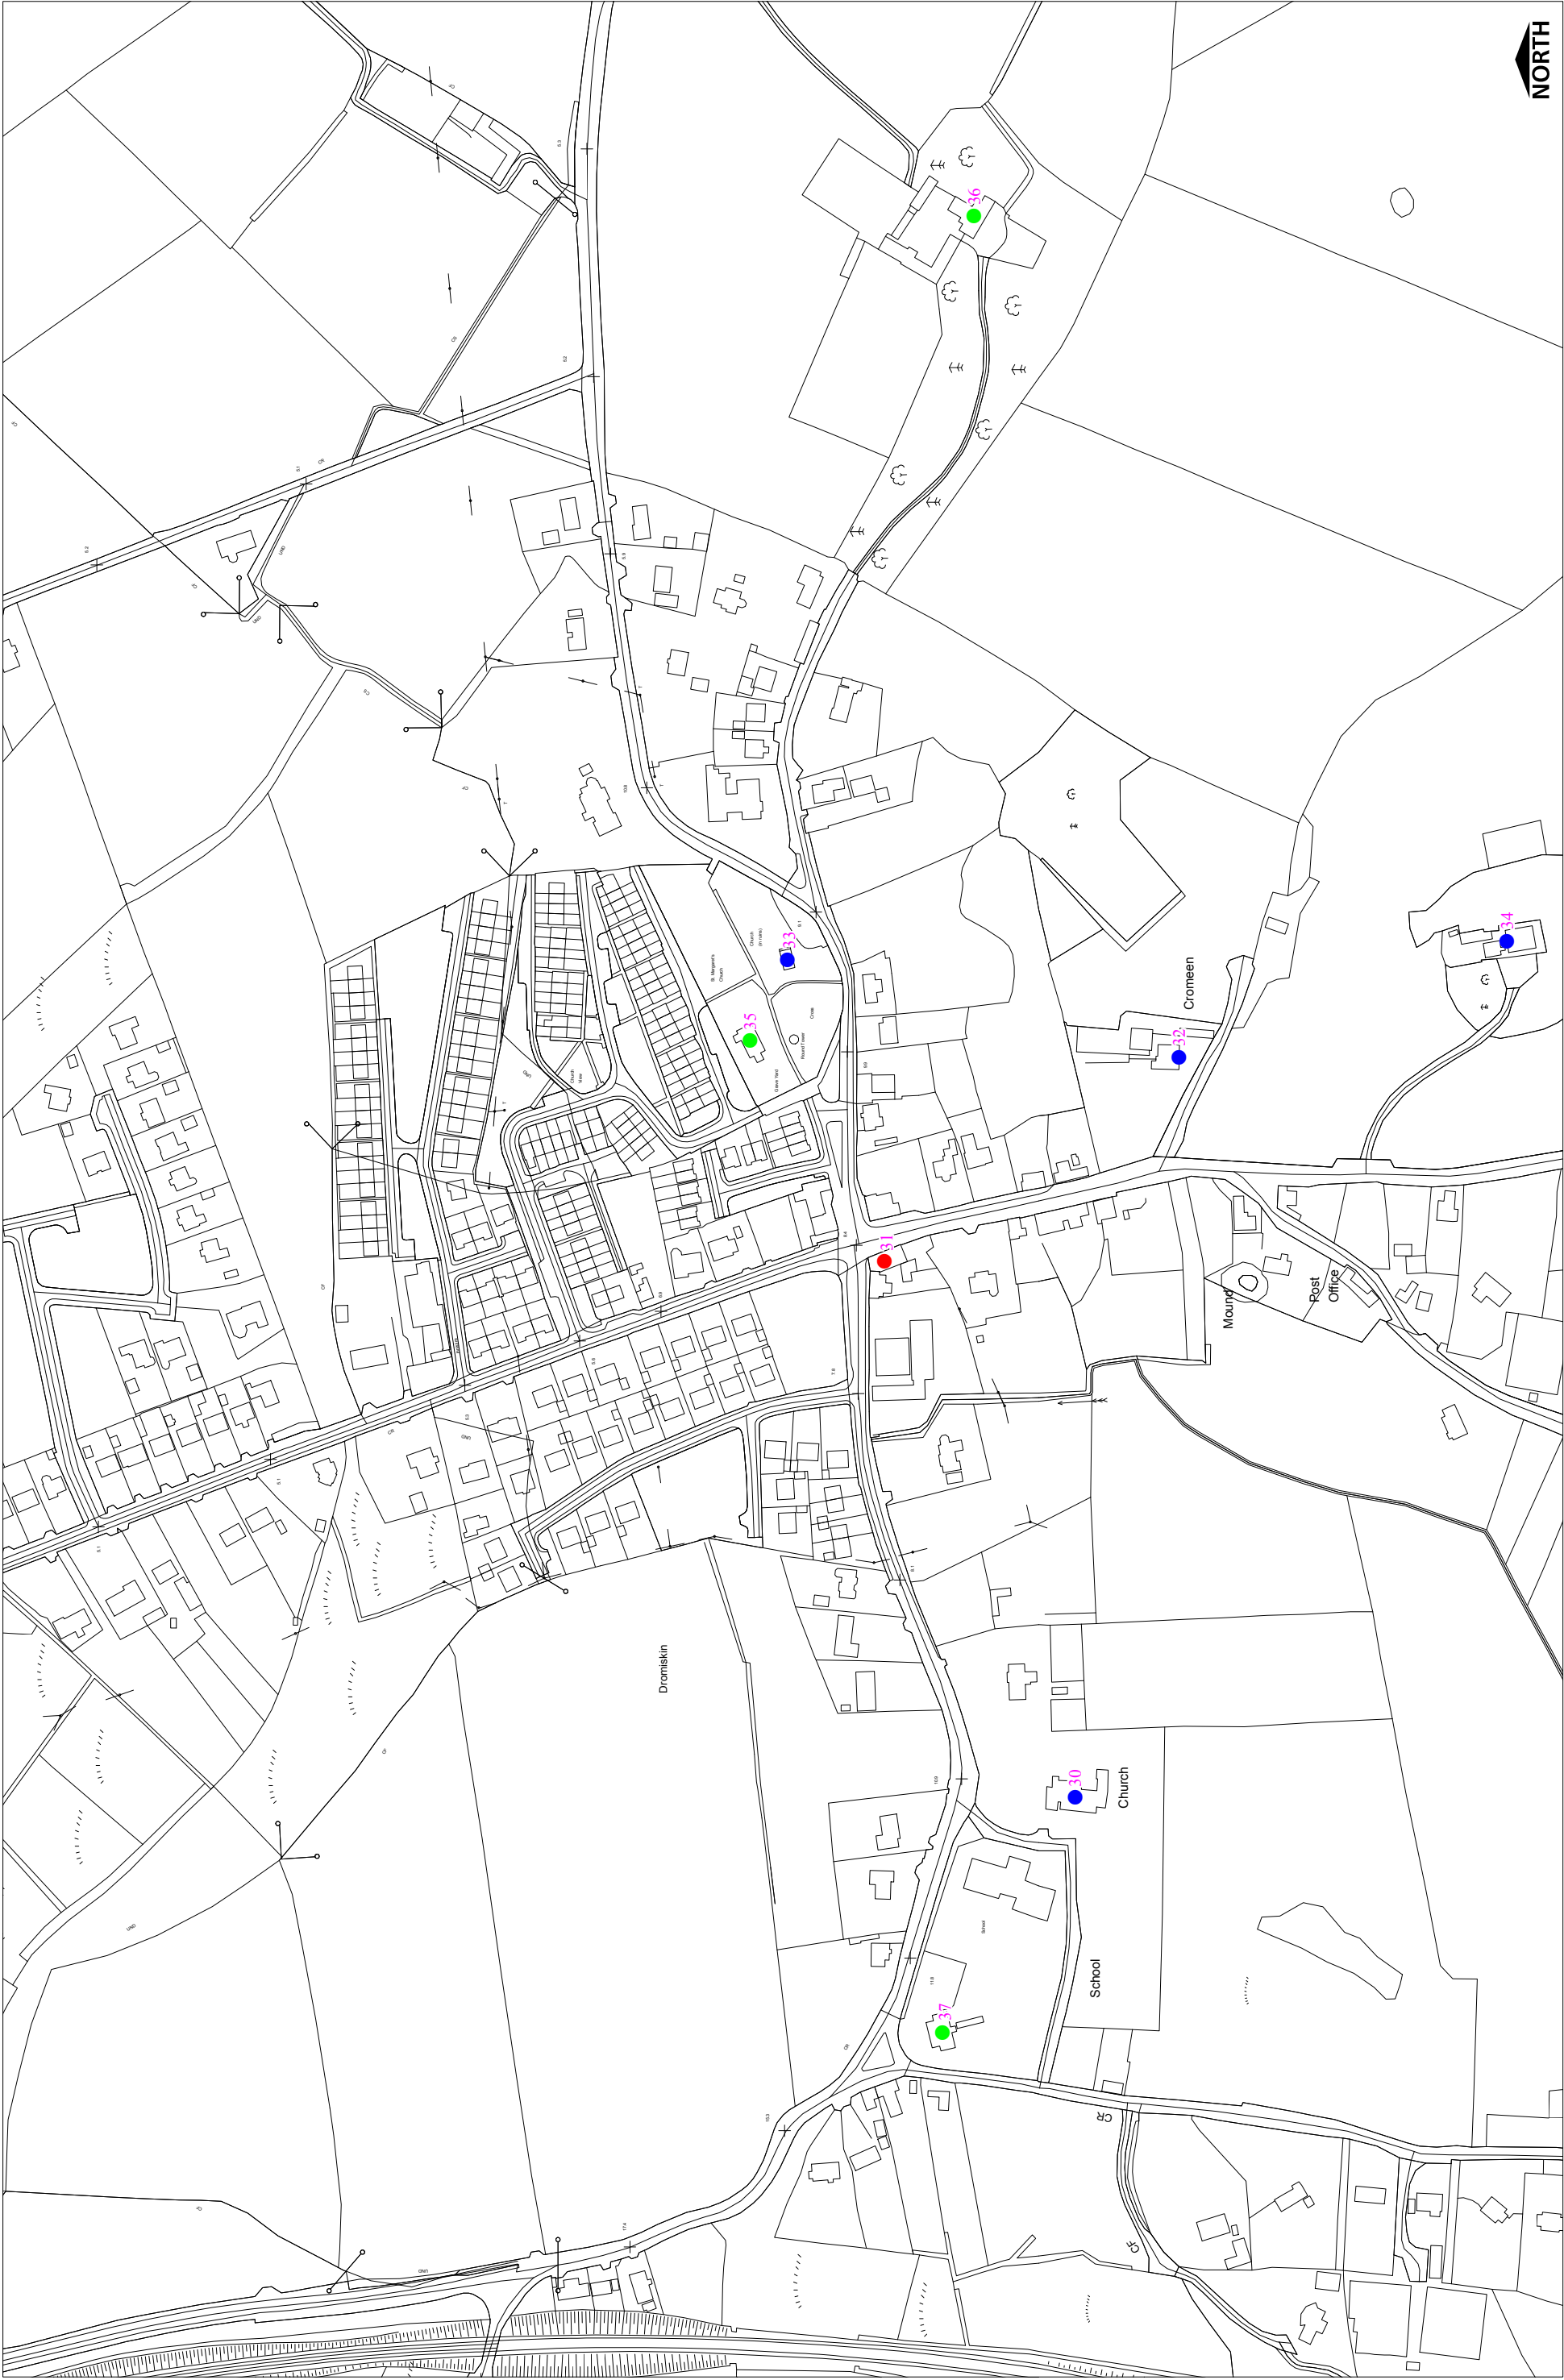

Draft Louth County Development Plan 2009 - 2015.
Record of Protected Structures.

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Existing Protected Structure	Lhs012-028	12	Milltown	Milltown Castle	Towerhouse	Late Medieval Tower House, with rounded corners and round corner towers	
Existing Protected Structure	Lhs012-029	12	Whiterath	Whiterath Thatch	Thatched Cottage	Detached six-bay single-storey thatched dwelling, built c. 1830. Rectangular-plan, bowed entrance to north elevation.stone walled with circular bay at front door, five chimney stacks. -OPW site 29	13901201
Existing Protected Structure	Lhs012-030	12	Church of St. Peter, Dromiskin	Church of St Peter	Church	1926, Roman Catholic church, by Ashlin & Coleman. Italianate Romanesque style, entrance gable with big wheel window, belfry with slated ogee dome. Freestanding gable-fronted double-height stone Rectangular-plan, six-bay nave, single-storey lean-to aisles	13829004
Proposed To Be Deleted	Lhs012-031	12	Dromiskin	Ginnety's Public House	Public House	Corner-sited three-bay two-storey house, built c. 1870, now also in use as public house and shop. L-plan, two-bay return to west with single-storey range extending further west, three-bay dwelling to south	13829003
Existing Protected Structure	Lhs012-032	12	Dromiskin	Cromeen	House	Detached two-bay single-storey with dormered attic red brick bungalow, built c. 1900, in the Arts and Craft style. Square on pan, veranda to south-west corner, rectangular flat-roofed bay to south elevation, lean-to porch to west elevation, lean-to extension to nw.	13829007
Existing Protected Structure	Lhs012-033	12	Dromiskin	Round Tower, Cross And Church	Church	late C9 Round Tower, pre-reformation Church ruin. Detached Board of First Fruits style Church of Ireland church, dated 1821, no longer in use. Three-bay nave with engaged three-stage pinnacled tower to west, single-storey gabled vestry to north elevation	13829001
Existing Protected Structure	Lhs012-034	12	Dromiskin	'Ardronan' - Dromiskin Glebe	House	1766, Palladian red brick house, Detached three-bay two-storey over basement, former rectory.	13829006
Proposed Protected Structure	LHS012-035	12	St. Margaret / St. Ronan's Church of Ireland	Church Of Ireland Church	Church	Detached Board of First Fruits style Church of Ireland church, dated 1821, no longer in use. Three-bay nave with engaged three-stage pinnacled tower to west, single-storey gabled vestry to north elevation with corrugated-iron roof.	13829001
Proposed Protected Structure	LHS012-036	12	Dromiskin House	Dromiskin House	House	Detached three-bay two-storey over basement house, built c. 1780, with single-storey extension having bay window, c. 1850, to east gable, and gable porch addition to front (south)	13829002
Proposed Protected Structure	LHS012-037	12	Dromiskin National School	Dromiskin National School	School	Detached six-bay single-storey gable-fronted national school, dated 1927. Single-storey flat-roofed entrance porches to east and west, flat-roofed projection to rear.	13829005
Proposed Protected Structure	LHS012-038	12	Milltown	Milltown Cottage	House	Detached three-bay two-storey house, built c. 1830, with curved projecting porch to front (south) elevation and single-bay single-storey extension to east	13901202
Proposed Protected Structure	LHS012-039	12	Dellin House	Dellin House	Country House	Detached six-bay two-storey house, built c. 1800. Rectangular-plan, full-height box entrance bay addition to south elevation, extension to east	13901203
Proposed Protected Structure	LHS012-040	12	Newtown Darver		Farm House	Detached seven-bay single-storey house, built c. 1830. Rectangular-plan, cantled bay window c. 1900 to east of south elevation, two-bay flat-roofed garage extension to east.	13901204

Draft Louth County Development Plan 2009 - 2015.
Record of Protected Structures.

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Proposed Protected Structure	LHS012-041	12	Saint Michael's Parochial House, Darver	Saint Michaels Parochial House Darver	Parochial House	Detached three-bay two-storey parochial house, built c. 1900. Gable-fronted breakfront to west of south elevation, flat roof porch to south, two-storey return to north.	13901205
Proposed Protected Structure	LHS012-042	12	Saint Michael's Roman Catholic Church Darver	Saint Michael's Roman Catholic Church Darver	Church	Freestanding Roman Catholic church, built c. 1905. Gable-fronted, two-stage bell tower to north-east, single-storey L-shaped vestry to south-east, gable-fronted breakfront to north; six-bays to nave (west), chancel to south, buttresses divide window openings.	13901206
Proposed Protected Structure	LHS012-043	12	Darver National School	Darver National School	School	Detached six-bay single-storey school, built c. 1940. Rectangular-plan	13901207
Proposed Protected Structure	LHS012-044	12	Grange House	Grange House	Country House	Detached three-bay two-storey over basement house, built c. 1830. Rectangular-plan, four-bay south elevation, flat-roofed central portico projecting from north elevation, flat-roofed basement extensions to west elevation, flat-roofed single-storey extension to east.	13901208
Proposed Protected Structure	LHS012-045	12	Grange House Gate Lodge, Milltown Grange	Grange House Gate Lodge	Gate Lodge	Detached multiple-bay single-storey gate lodge, built c. 1830. Recessed corners to west (main) elevation carried on posts, gabled wing to south, flat-roofed extension to internal corner between south wing and west elevation main block c. 1960.	13901209
Proposed Protected Structure	LHS012-046	12	Marsh Farm, Mooretown	Marsh Farm	Farmyard Complex	Series of attached and detached multiple-bay single- and two-storey farm buildings, built c. 1860.	13901210
Proposed Protected Structure	LHS012-047	12	Marsh Farm House, Mooretown	Marsh Farm House	Farm House	Detached three-bay two-storey house, built c. 1860. Rectangular-plan, half-dormers to roof, three-bay single-storey extension to east.	13901211
Proposed Protected Structure	LHS012-048	12	Glebe House, Dunmahon	Glebe House	Curate's House	Detached three-bay two-storey rendered former rectory, built c. 1820, now in private domestic use. T-plan, lean-to entrance porch c. 1900 to west elevation.	13901213
Proposed Protected Structure	LHS012-049	12	Rossmakay	Rossmakay	House	Detached five-bay two-storey house, built c. 1830. Rectangular-plan, open entrance porch to south elevation, lean-to extension to east of north elevation, two-storey cantated bay to north of west elevation.	13901214

297277.0

10

297277.0

281864.1



290956.6

281864.1

291506.1

290956.6



Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie


Note: Details shown on this map are for information purposes only.
Further details on any item should be clarified with Louth County Council.
The map has been produced by Louth County Council with available Local Authority and Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number 2009/30/CCMA/LouthLocalAuthorities.

Not to scale when printed A3 Landscape

Louth County Council Record of Protected Structures Sheet No 13

- Protected Structure
- Proposed Protected Structure
- Proposed to be deleted from Register of Protected Structures
- All Protected Structures within this boundary are in the Dundalk & Environs Plan

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Proposed Protected Structure	LHS013-001	13	Tullakeel House	Tullakeel House	House	Detached three-bay two-storey over basement house, built c. 1840. L-plan with single-pitched addition to north-west.	13901301
Proposed Protected Structure	LHS013-002	13	Saint Malachy's Roman Catholic Church, Reaghstown	Saint Malachy's Roman Catholic Church	Church	Freestanding gable-fronted Roman Catholic church, built c. 1830, remodelled 1867 and 1922. T-plan with single-storey flat-roofed extensions to south	13901302
Proposed Protected Structure	LHS013-003	13	Cardistown House	Cardistown House	House	Detached three-bay two-storey over basement house, built c. 1865. Central eaves-pedimented bay to north, single-storey flat-roofed entrance porch, flanking single-storey canted bay-windows and canted oriel window to south adapted to fire escape c. 1930.	13901303
Proposed Protected Structure	LHS013-004	13	Cardistown House Farmyard Complex, Cardistown	Cardistown House Farmyard Complex	Farmyard Complex	Detached nine-bay two-storey former stable block, built c. 1870, now in use as farm building. Rectangular-plan, gable-fronted breakfront to east, single-pitched addition to north-east.	13901304
Proposed Protected Structure	LHS013-005	13	Churchtown	Churchtown House	Curate's House	Detached three-bay two-storey over basement former rectory, built c. 1820, now in use as private house.	13901305

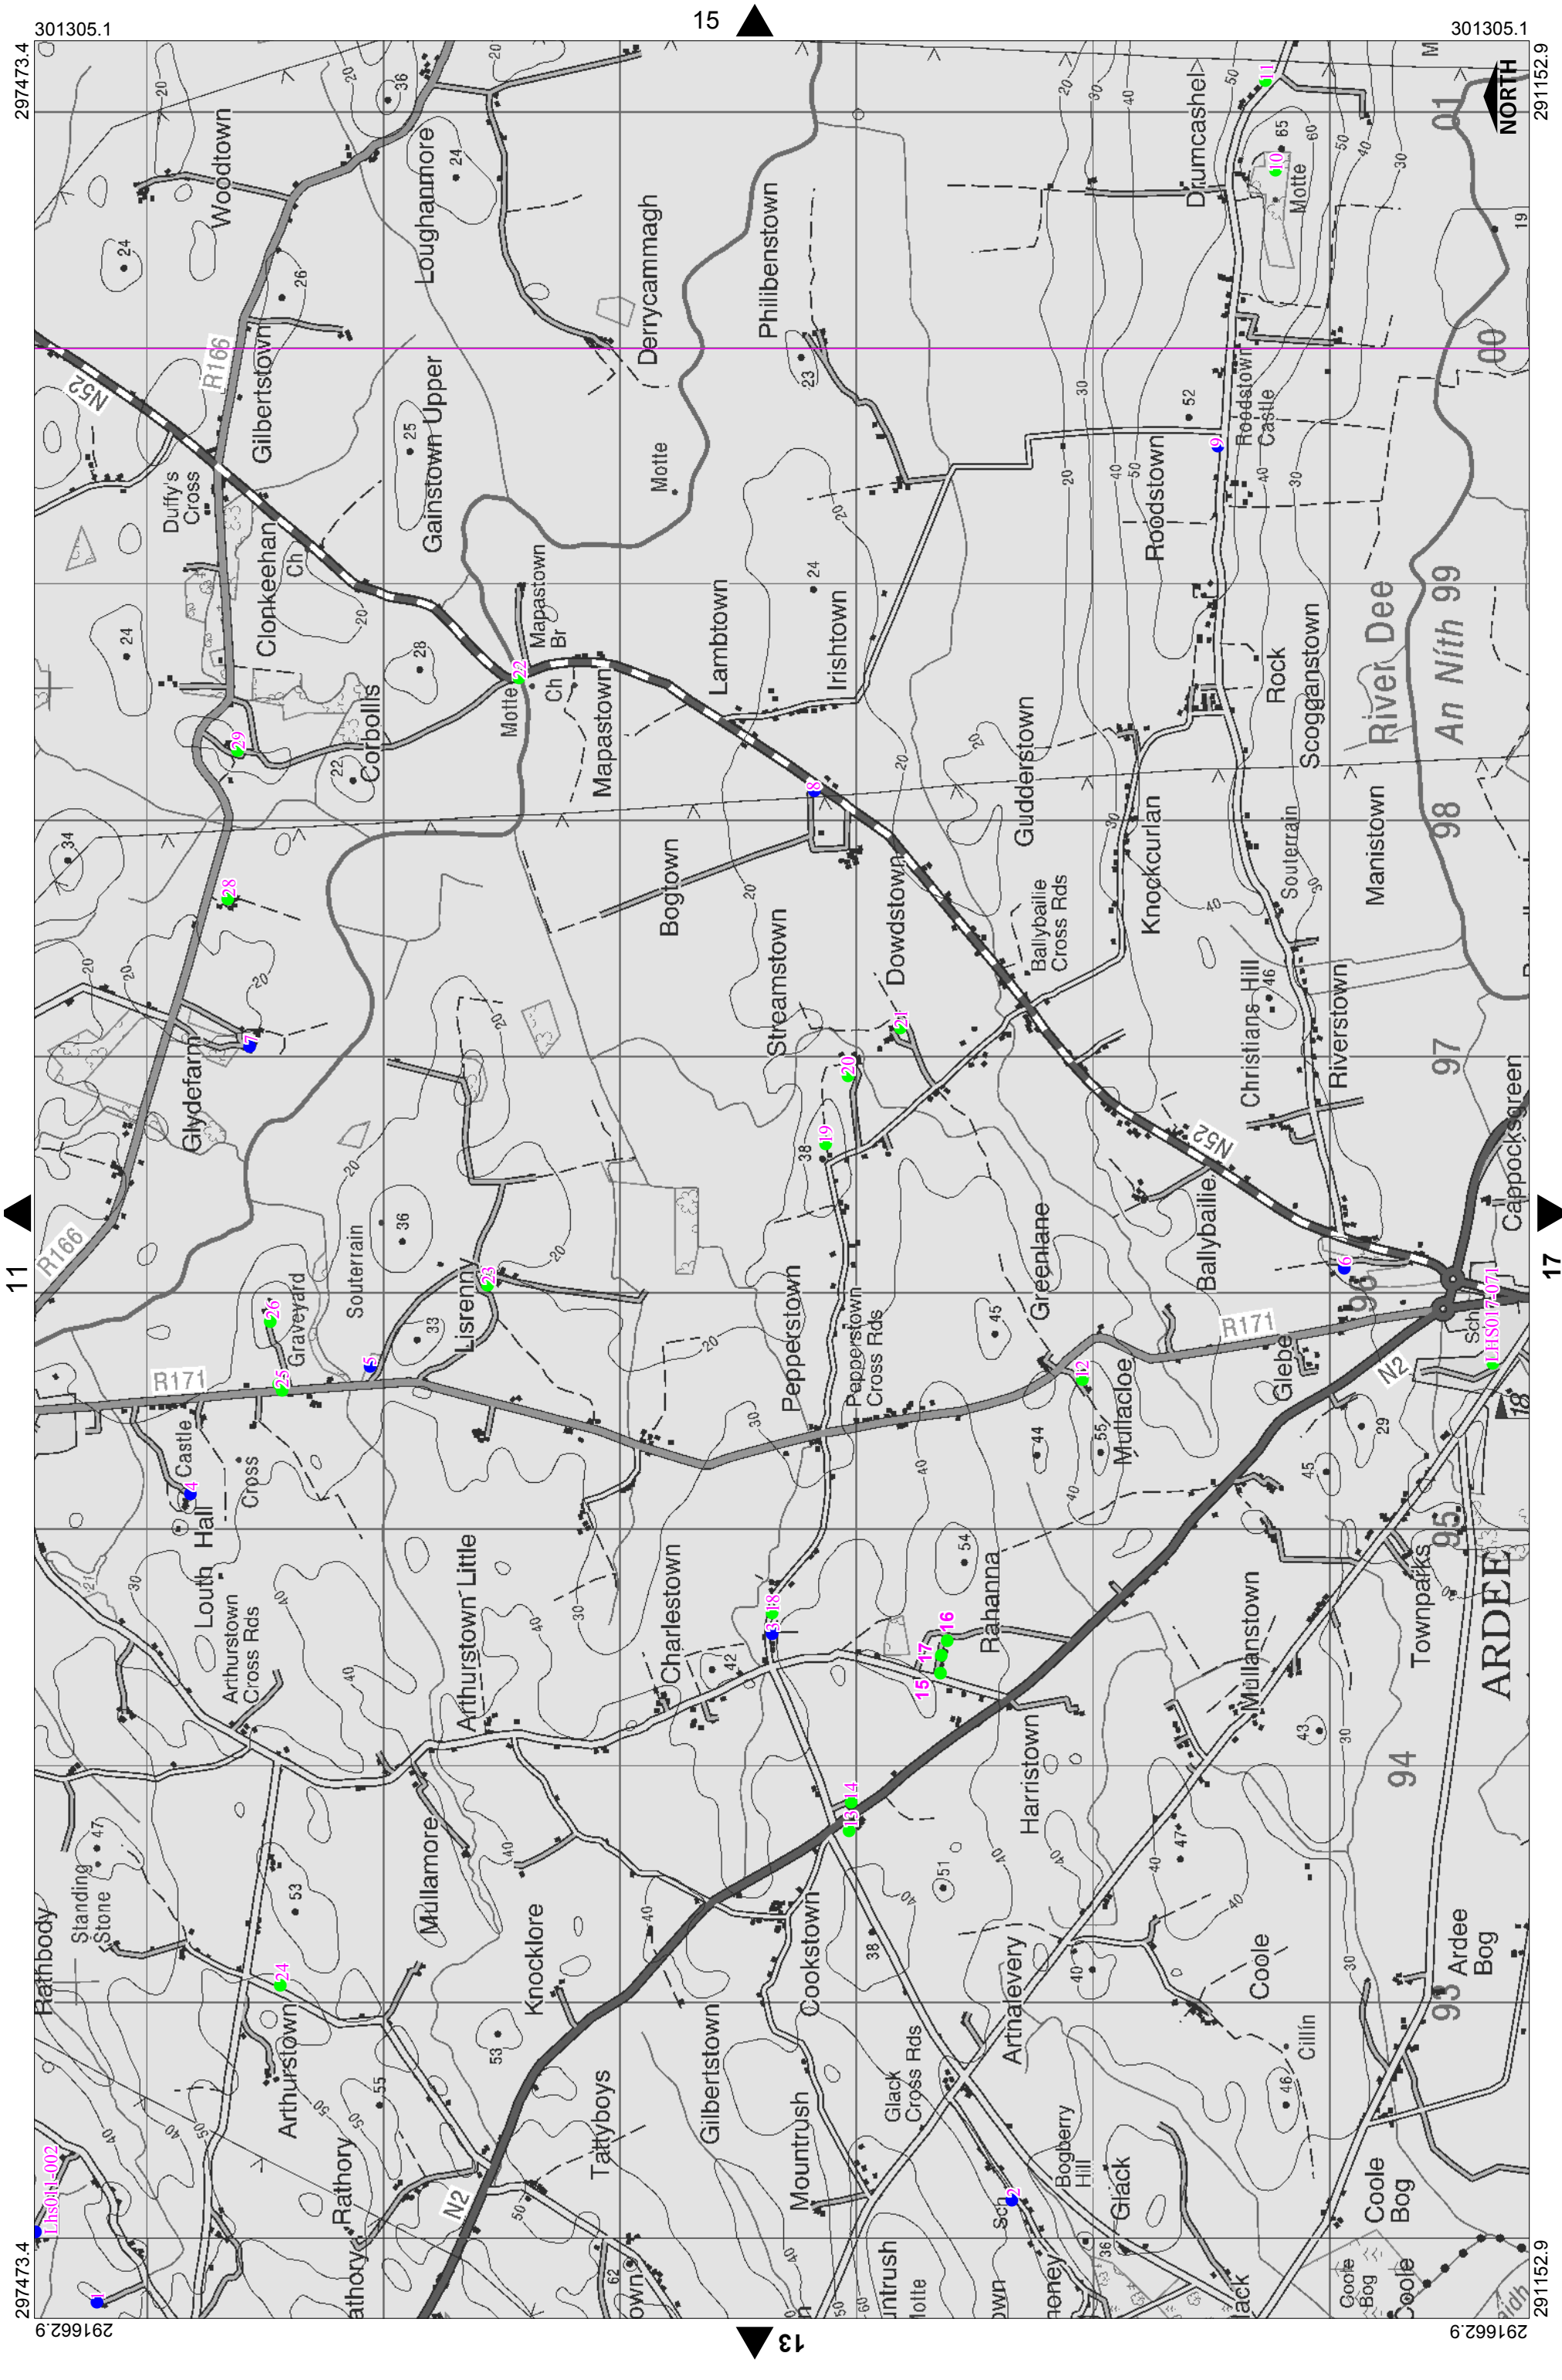



Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie

Louth County Council
Record of Protected Structures
Sheet No 14

Note: Details shown on this map are for information purposes only.
Further details on any item should be clarified with Louth County Council.
The map has been produced by Louth County Council with available Local Authority and Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number 2009/30/CCMA/LouthLocalAuthorities.

Not to scale when printed A3 Landscape

Protected Structure
Proposed Protected Structure
Proposed to be deleted from
Register of Protected Structures

All Protected Structures within
this boundary are in the
Dundalk & Environs Plan


Draft Louth County Development Plan 2009 - 2015.
Record of Protected Structures.


Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Existing Protected Structure	Lhs014-001	14	Reaghstown	Reaghstown Thatch	Thatched Cottage	Five-bay single storey whitewashed thatched cottage - OPW site 30	
Existing Protected Structure	Lhs014-002	14	Stormanstown	Stormanstown Old National School	School	former school, dated 1865, now derelict.Five bay, single storey, T-plan, projecting gable-fronted entrance bay to south, squared rubble with dressed quoins and cills, brick headsand reveals to opes.	13901405
Existing Protected Structure	Lhs014-003	14	Charlestown	Charlestown Church Of Ireland	Church	Freestanding Church of Ireland church, dated 1828, no longer in use. First fruits church of rubble stone with west tower and spire, Three-bays to nave, projecting single-bay gable-fronted chancel to east and square-plan three-stage bell tower, terminating in octagonal spire to west.	13901411
Existing Protected Structure	Lhs014-004	14	Louth Hall	Louth Hall	Towerhouse	Late medieval tower house c.1350. with detached multiple-bay three-storey Georgian house, built c. 1760 with a mid 18thC rebuilding and gothicisation 1810, now in ruins. Pidgon House survives.	13901426
Existing Protected Structure	Lhs014-005	14	Lisrenny	Lisrenny	Gate Lodge	Detached three-bay single-storey former gate lodge, built c. 1850, castellated stone lodge, with wrought iron gates and railings. now in private domestic use. Projecting entrance to north elevation, extension to south; entrance gate to north-east.	13901419
Existing Protected Structure	Lhs014-006	14	Dundalk Road, Ballybailie	Red House	Country House	Detached five-bay three-storey house, built c. 1810, attached to early eighteenth century house to north, now forming three-storey wing. Semi-octagonal single-storey porch projecting from centre of east elevation.	13901401
Existing Protected Structure	Lhs014-007	14	Glydefarm	Glyde Court	House	Detached seventeen-bay two-storey house with attic, built c. 1780, remodelled and extended in Jacobean style, 1868, with curvilinear gables and gablets, and projecting bays. in derelict condition.	13901425
Existing Protected Structure	Lhs014-008	14	Dowdstown	Dowdstown House	House	Three-bay two-storey house, c. 1860, with bracketed wide eaved hipped roof, smooth plaster finish with rusticated quoins, Rectangular-plan, gable-fronted pitched roof entrance porch to north elevation, three-bay two-storey wing to west, conservatory to west of south elevation.	13901416
Existing Protected Structure	Lhs014-009	14	Roodstown	Roodstown Castle	Towerhouse	Mid 15th C small tower house, four-storey rubble masonry with limestone trim, two square turrets	
Proposed Protected Structure	LHS014-010	14	Drumcashel	Drumcashel House	Country House	Detached three-bay two-storey house, built 1851, now derelict. Projecting porch to central bay of north (front) elevation, square-profile crenellated tower set back from parapet.	13901402
Proposed Protected Structure	LHS014-011	14	Stabannan Lodge, Drumcashel	Stabannan Lodge	Gate Lodge	Detached four-bay single-storey former gate lodge, built c. 1850, now in use as private house. L-plan, gable-fronted open porch to south, extension to north, gable-fronted porch to south-west.	13901403
Proposed Protected Structure	LHS014-012	14	Mullacloe	Mullacloe House	Farm House	Detached three-bay single-storey house, built c. 1840. L-plan, projecting hipped roof single-bay to south, lean-to and flat-roofed extensions to west c.1970.	13901404
Proposed Protected Structure	LHS014-013	14	Cookstown House, Cookstown	Cookstown House	House	Detached five-bay two-storey house, built c. 1790. L-plan, returning three-bays two-storey wing to south-east c. 1830, full-height canted-bay to west elevation, rendered embellishments and projecting cast-iron entrance porch to north elevation c. 1890	13901406

Draft Louth County Development Plan 2009 - 2015.
Record of Protected Structures.

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Proposed Protected Structure	LHS014-014	14	Charlestown Rectory, Cookstown	Charlestown Rectory	Curate's House	Detached four-bay two-storey former rectory, built c. 1770, now in private domestic use. L-plan, four-bays to east elevation, two-storey return to rear (south), entrance porch to north c. 1880.	13901407
Proposed Protected Structure	LHS014-015	14	Rahanna House Gardener's House, Rahanna	Rahanna House Gardener's House	House	Attached three-bay single-storey with attic former head gardener's house, built c. 1880, now in private domestic use. Rectangular-plan, extension to east c.1980, attached to walled garden to south-east, built 1823.	13901408
Proposed Protected Structure	LHS014-016	14	Rahanna House, Rahanna	Rahanna House	Country House	Detached three-bay two-storey over basement house, built 1823. Single and two-storey return to west, stone porch to east.	13901409
Proposed Protected Structure	LHS014-017	14	Rahanna House Farmyard Complex, Rahanna	Rahanna House Farmyard Complex	Farmyard Complex	Four ranges of multiple-bay single- and two-storey stone stables, built 1823, attached to farm buildings to west. Stableyard with two-storey range to south and west, single-storey range to north and east, farmyard to west.	13901410
Proposed Protected Structure	LHS014-018	14	Graveyard Gateway , Charlestown	Graveyard Gateway	Gates/railings	Stone memorial gateway, dated 1919, leading to graveyard to south. Ashlar limestone walling, central four-centred arched opening flanked by lower side bays, vertical bay divisions marked by projecting square-profile decorative piers with lion head motifs,	13901412
Proposed Protected Structure	LHS014-019	14	Wind Mill, Pepperstown	Wind Mill	Wind Mill	Detached circular-plan windmill, built c. 1750, now in ruins. Random rubble stone walling. Narrow loop windows, stone lintels. Four-centred arched door openings to east and west, flat stone voussoirs to arches. Windmill set on elevated site within field. □	13901413
Proposed Protected Structure	LHS014-020	14	Pepperstown House, Pepperstown	Pepperstown House	House	Detached four-bay two-storey house, built c. 1820. Single-bay two-storey extension to west of south elevation c. 1860 creating T-plan structure, single-storey porch and dormer window to south elevation c.1860	13901414
Proposed Protected Structure	LHS014-021	14	Streamstown House, Streamstown	Streamstown House	House	Detached six-bay two-storey house, built c. 1820. L-plan, single-storey flat-roofed conservatory to west elevation, gable-fronted entrance porch to south elevation, c. 1970	13901415
Proposed Protected Structure	LHS014-022	14	Mapastown	Mapastown Bridge	Road Bridge	Single-arch stone road bridge over River Glyde, built c. 1820.	13901417
Proposed Protected Structure	LHS014-023	14	Lisrenny House, Lisrenny	Lisrenny House	Country House	Detached eight-bay two-storey with attic house, built c. 1740. Three two-storey returns to south, single- and two-storey extension to west c. 1800.	13901418
Proposed Protected Structure	LHS014-024	14	Former Parochial House, Arthurstown	Former Parochial House	Presbytery	Detached three-bay two-storey former parochial house, built c. 1880, now in private domestic use. Rectangular-plan, timber porch to south elevation	13901420
Proposed Protected Structure	LHS014-025	14	Memorial Gateway, Louth Hall	Memorial Gateway	Gates/railings	Stone memorial gateway, dated 1868, leading to graveyard to east. Tooled, elaborately carved limestone gates, pointed arch opening in pointed gabled hood, hood-moulding with carved head label-stops, flanked by octagonal pinnaced piers with stone fleur-de-lis finials.	13901421

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Proposed Protected Structure	LHS014-026	14	Church Park, Louth Hall	Church Park	House	Detached multiple-bay two-storey house, built c. 1900. Irregular plan with gable-fronted projections to north-west gable front to north-east, projecting porches to north and south elevations.	13901422
Proposed Protected Structure	LHS014-027	14	Church of Ireland Graveyard, Louth Hall	Tallanstown Church Of Ireland Graveyard	Graveyard	Raised curvilinear graveyard, with interments from c. 1600. Enclosed by herringbone dry stone walling, elaborate stone entrance gate to west dated 1868. Range of headstones from unmarked grave markers to Celtic cross style, dating up to 1998.	13901423
Proposed Protected Structure	LHS014-028	14	Glydefarm	Glyde Farm	House	Detached three-bay two-storey house, built c. 1820. L-plan, lean-to two-storey return to west, flat-roofed extensions to north-west c. 1960.	13901424
Proposed Protected Structure	LHS014-029	14	Corbollis	Corbollis House Outbuildings	Outbuilding (Non Domestic)	Ranges of single- and two-storey stone outbuildings, built c. 1800, to Corbollis House (demolished c.1940). Ranges surround gravelled courtyard, smaller three-sided yard to south, various concrete lean-to extensions.	13901427

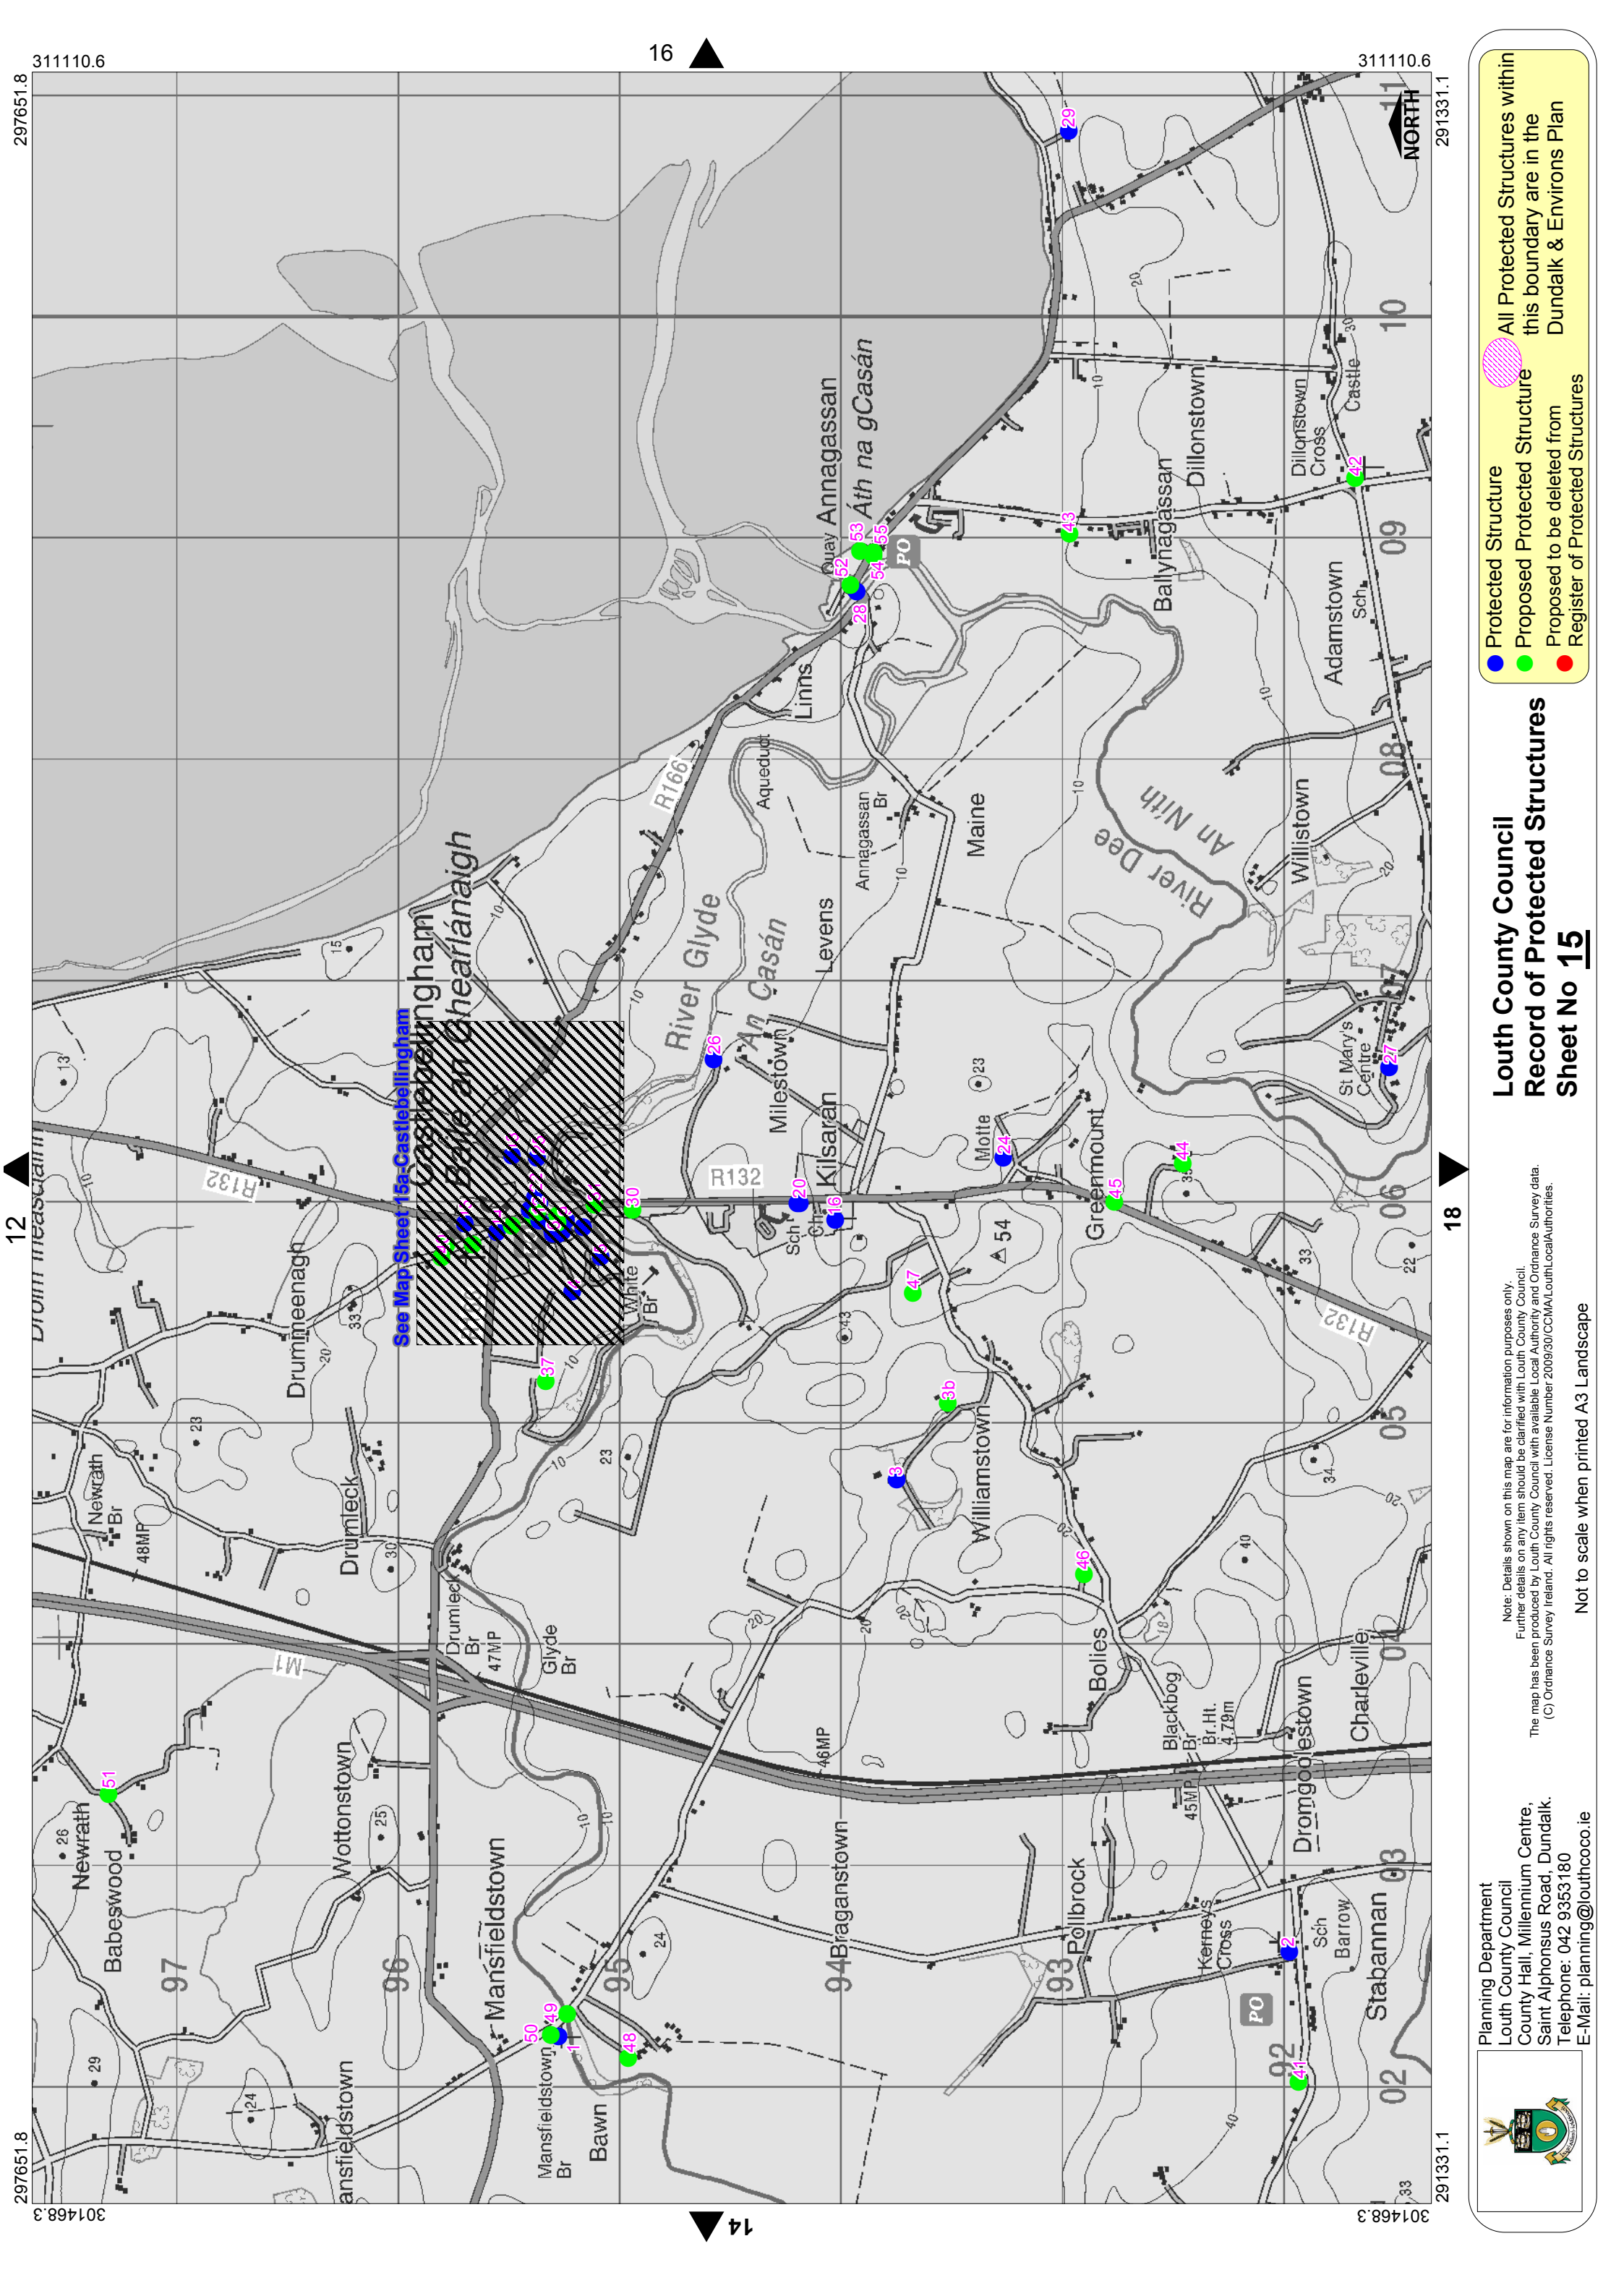

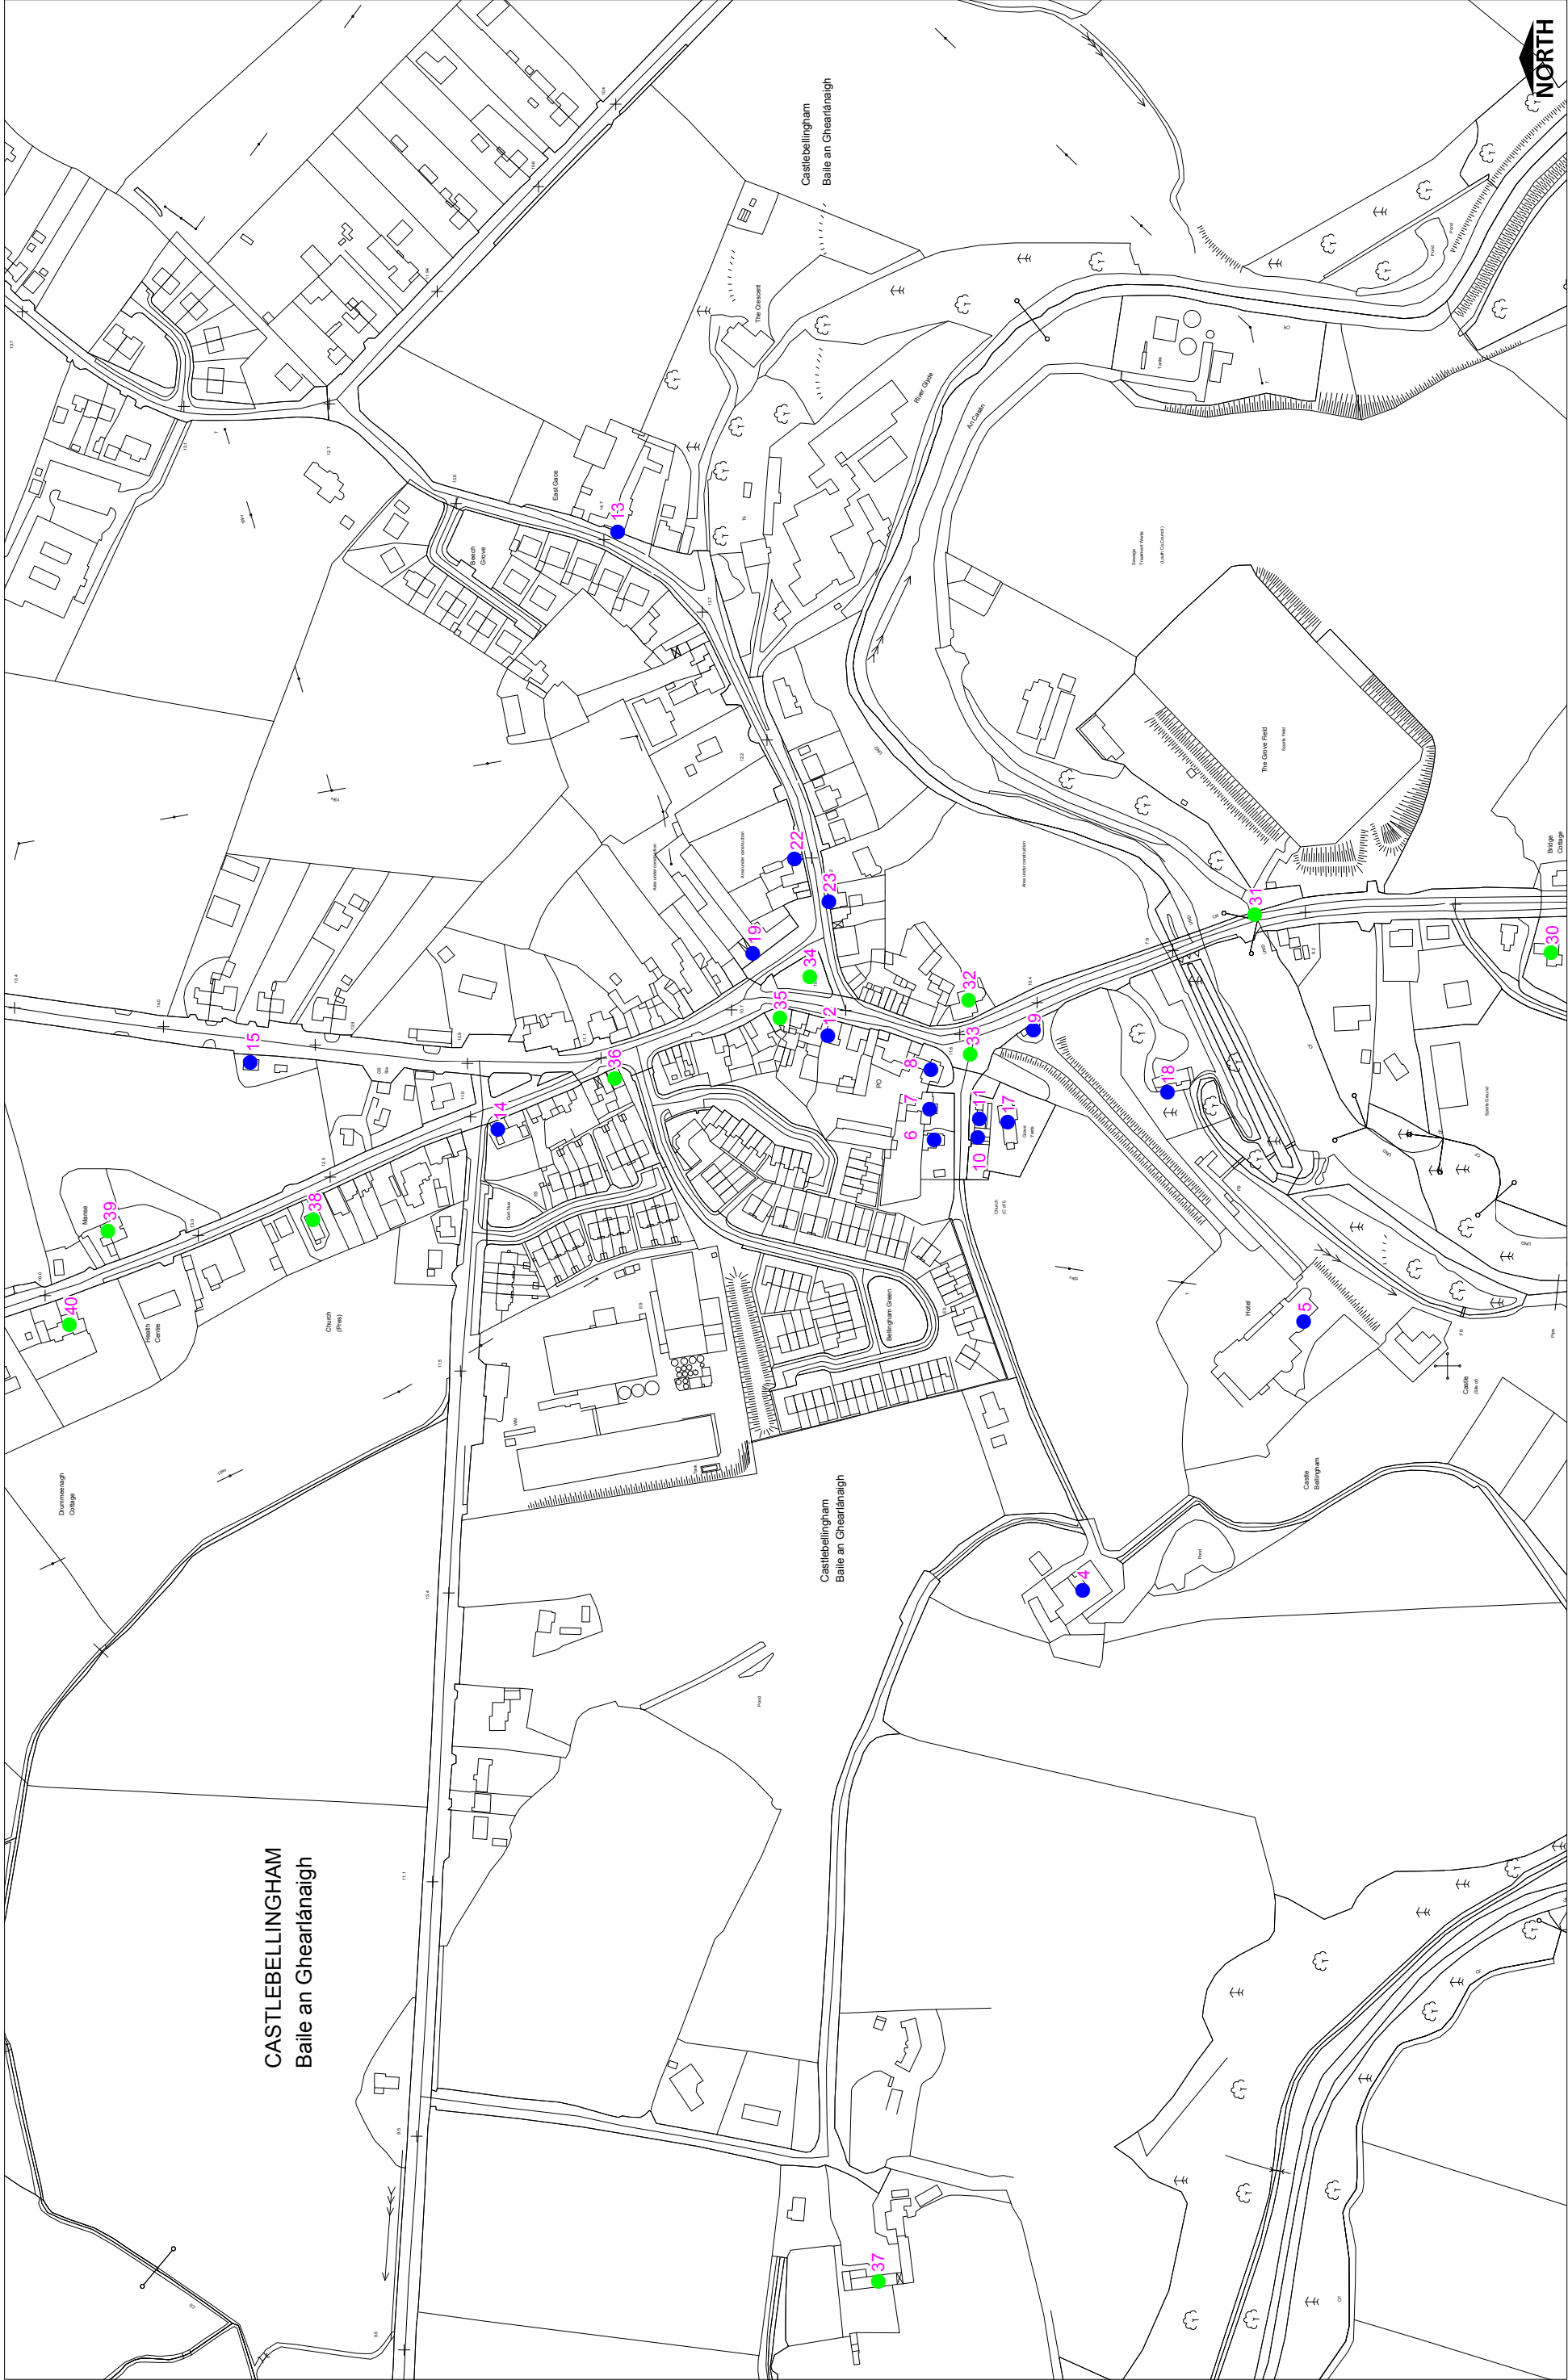

Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie

Note: Details shown on this map are for information purposes only.
Further details on any item should be clarified with Louth County Council.
The map has been produced by Louth County Council with available Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number 2009/00/CCLMA/LouthLocalAuthorities.

Not to scale when printed A3 Landscape

Louth County Council Record of Protected Structures Sheet No 15(a) Castlebellingham

- Protected Structure
- Proposed Protected Structure
- Proposed to be deleted from Register of Protected Structures
- All Protected Structures within this boundary are in the Dundalk & Environs Plan

Draft Louth County Development Plan 2009 - 2015.
Record of Protected Structures.

Status	I D	Map Sheet	Address	Name	Description	Notes	NIAH Number
Existing Protected Structure	Lhs015-001	15	Bawn	St Mary Mansfieldstown	Church	Ruined in 1640, rebuilt 1691, single cell rubble stone church.	
Existing Protected Structure	Lhs015-002	15	Stabannan	Catholic Church	Church	Mid C19 gothic revival church by WH Byrne, Freestanding gable-fronted Roman Catholic church, built 1887. Rectangular-plan, three-stage tower to south-east with broached spire, gable-fronted porch to west, single-storey sacristy to north-east, gabled chancel to north.	13901502
Existing Protected Structure	Lhs015-003	15	Williamstown	Williamstown House	Country House	1856-1860, Italianate house by William Caldbeck, five-bay, two-storey on semi-basement.L-plan, single-bay three-storey over basement return to north, broken pedimented breakfront over projecting portico to south, lean-to single-storey return to north-east	13901511
Proposed Protected Structure	LHS015-003B	15	Williamstown House Farmyard Complex, Kilsaran	Williamstown House Farmyard Complex	Farmyard Complex	Ranges of brick and stone former outbuildings, built c. 1860, now in domestic use. Multiple ranges of one- and two-storey buildings incorporating multiple-bay two-storey house to north-west, extension to south elevation south range	13901512
Existing Protected Structure	Lhs015-004	15	Castlecourt, Castlebellingham	Castlecourt	Office	Detached five-bay two-storey former stableyard, built c. 1730, now used as outbuildings to hotel. Originally U-plan, courtyard infilled with single-storey lean-to buildings, single-bay central pedimented breakfront.	13826004
Existing Protected Structure	Lhs015-005	15	Castlebellingham	Bellingham Castle	Hotel	Castellated house, from 1712, remodelled 1798, 1834, 1843, and late 19thC, Detached multiple-bay two- storey over basement former country house, now in use as hotel.	13826003
Existing Protected Structure	Lhs015-006	15	Castlebellingham	The Widows Houses - House 3	House	Detached multiple-bay single-storey with half-dormer attic gabled former estate worker's house, built c. 1830, now in use as private house. Rectangular main block, gabled projection to east with single-storey hipped-roof bay window, gabled porch projection.	13826011
Existing Protected Structure	Lhs015-007	15	Castlebellingham	The Widows Houses - House 4	House	Detached two-bay single-storey with half-dormer attic stone former estate worker's house, built c. 1830, now a private house. Neo tudor with diagonal set stacks, oriel diamond pane window and ornate bargeboards. L-plan, single-storey gabled porch to west.	13826010
Existing Protected Structure	Lhs015-008	15	Castlebellingham	The Widows Houses - House 5	House	Detached neo-tudor, multiple-bay two-storey over basement former estate worker's house, built c. 1830, now in use as private house. Rectangular-plan main block, projecting gable-fronted bay to south, two-bay north wing with single-storey gable-fronted entrance porch to east.	13826009
Existing Protected Structure	Lhs015-009	15	Castlebellingham	Bellingham Castle Gate House	Gate Lodge	Freestanding castellated entrance gate screen, built c. 1820. Identical east and west elevations, central single-bay two-storey castellated block with carriage arch, flanked by single-bay three-storey castellated towers and single-bay single-storey castellated screen walls to north and south.	13826005
Existing Protected Structure	Lhs015-010	15	Castlebellingham	The Widows Houses - Terraced Cottage 1	House	Pair of semi-detached multiple-bay single-storey with half-dormer attic former estate worker's houses, built 1826/7, now in use as private houses. Gabled projecting bay to east, gabled breakfront central bay, porch extension to west gable built 1864.	13826012
Existing Protected Structure	Lhs015-011	15	Castlebellingham	The Widows Houses - Terraced Cottage 2	Cottage	Neo tudor. one of a pair of semi-detached multiple-bay single-storey with half-dormer attic former estate worker's houses, built 1826/7, now in use as private houses.	13826012


Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Existing Protected Structure	Lhs015-012	15	Castlebellingham	Striped Brick House	House	Detached single-bay two-storey gable-fronted house, built c. 1900, yellow and red brickwork in striped patterns on ground floor. Ornate bargeboards.	13826019
Existing Protected Structure	Lhs015-013	15	Annagassan Road , Castlebellingham	Red Brick House	House	Detached three-bay two-storey red brick house, built c. 1900. Single-storey with half attic brick outbuilding to north. brick recessed doorway with semi circular decorative brick arch above.	13826016
Existing Protected Structure	Lhs015-014	15	Castlebellingham	Foley's Tea Rooms	Thatched Cottage	Detached five-bay single-storey thatched house, built c. 1820, now also in use as café. replacement windows - OPW site 32	13826022
Existing Protected Structure	Lhs015-015	15	Dundalk Road , Castlebellingham	Horseshoe Arch	Forge	Detached two-bay single-storey forge, built c. 1880, whitewashed rubble stone with horseshoe shaped doorway. now disused.	13826028
Existing Protected Structure	Lhs015-016	15	Kilsaran	St Mary's Church	Church	Freestanding Roman Catholic church, dated 1814. T-plan, three-stage belfry entrance tower to east elevation dated 1856, gable-fronted porches to north and south transepts, single-storey flat-roofed sacristy to west c. 1970. pinnacles and crenellations	13901514
Existing Protected Structure	Lhs015-017	15	Castlebellingham	Kilsaran Parish Church	Church	Freestanding Church of Ireland church, built 1852. Cruciform-plan, three-bay nave, north and south transepts, single-bay chancel to east, engaged square two-stage tower with broached octagonal spire to west, lean-to vestry to north.	13826007
Existing Protected Structure	Lhs015-018	15	Castlebellingham	The Old Mill	House	A two-storey, four- bay converted Mill Building , whitewashed random rubble exterior, millrace and millwheel.	
Existing Protected Structure	Lhs015-019	15	Main Street / Brewery Street , Castlebellingham	Corn Mill	Grain Store	Two, three and four-storey red brick former grain store and kiln building, originally part of Cairns Brewery. Corner-sited detached multiple-bay two-storey former mill, dated 1866, now disused. L-plan, extended to south, return wing to rear (east).	13826013
Existing Protected Structure	Lhs015-020	15	Brewery Terrace, Milestown	09 Brewery Terrace	House	Semi-detached three-bay two-storey house, built c. 1870. in local red brick. Gable-fronted porch and half-dormers to east, lean-to extension to west	13901515
Existing Protected Structure	Lhs015-021	15	Brewery Terrace, Milestown	10 Brewery Terrace	House	Semi-detached three-bay two-storey house, built c. 1870 in local red brick. Gable-fronted porch and half-dormers to east	13901516
Existing Protected Structure	Lhs015-022	15	Annagassan Road , Castlebellingham	Three-storey house	House	c. 1800. Terraced Four-bay, three storey house with slate roof, brick chimneys, rendered front façade – painted. Return to rear	13826014
Existing Protected Structure	Lhs015-023	15	Castlebellingham	Four-bay House	House	Attached five-bay two-storey house, built c. 1850. Integral carriage arch to east	13826018
Existing Protected Structure	Lhs015-024	15	Greenmount	Greenmount Motte	Motte		
Existing Protected Structure	Lhs015-025	15	Smallwares, Annagassan Road,	Smallwares	Factory	Victorian Detached multiple-bay two- and three-storey former brewery, red brick, slate roofs. built c. 1870, now in use as factory and private residence.	13826015

Draft Louth County Development Plan 2009 - 2015.
Record of Protected Structures.

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Existing Protected Structure	Lhs015-026	15	Milestown	Milestown House	House	built in 1925 within the walls of the earlier building on the site which was destroyed by fire built in 1923 – a long 2-storey building, with rendered exterior, slate roof, brick chimney stacks, steel casement windows.	
Existing Protected Structure	Lhs015-027	15	Drumcar	Drumcar House (St Mary's Hospital)	Hospital	Detached five-bay three-storey over basement former country house, built 1777, Converted to hospital in 1948 now used as a residential care home.	13901503
Existing Protected Structure	Lhs015-028	15	Linns/Ballynagassan	Annagassan Bridge	Road Bridge	Five-arch limestone road-over-river bridge, built c. 1800, over the River Glyde	13901507
Existing Protected Structure	Lhs015-029	15	Salterstown	Salterstown Thatch	Thatched Cottage	Four-bay single-storey stone/clay walled thatched cottage with projecting flat roofed porch, pink washed with PVC windows. lean-to extension and single-pitch corrugated-iron roofed outbuilding to east, lean-to extension to south.-OPW site 36	13901505
Proposed Protected Structure	LHS015-030	15	Castlebellingham	Former School	School	Detached three-bay double-height former school, built c. 1860, now in use as house. Rectangular-plan, lean-to extension to west c. 1890.	13826001
Proposed Protected Structure	LHS015-031	15	Castlebellingham		Road Bridge	Four-span road-over-river bridge, built c. 1850.	13826002
Proposed Protected Structure	LHS015-032	15	Castlebellingham		House	Detached multiple-bay two-storey house, built, c. 1850. L-plan, three-bay rectangular pitched roof west wing, three-bay rectangular hipped roof south wing with full-height conical-roofed semi-circular bow to west side of south elevation, single-bay square	13826006
Proposed Protected Structure	LHS015-033	15	Alpine Crucifix, Castlebellingham	Alpine Crucifix	Monument	Freestanding crucifix, erected c. 1930, on south-east of raised circular grass area bounded by random rubble stone walling. Ashlar limestone pedestal, marble plaque to south with inscription.	13826008
Proposed Protected Structure	LHS015-034	15	Castlebellingham	Water Pump	Waterpump	Freestanding cast-iron water pump, erected c. 1880. Circular shaft with banded clamps, wider head with embossed inscription on side "Elliot Foundry Dundalk".	13826020
Proposed Protected Structure	LHS015-035	15	P.J. Byrne Public House, Castlebellingham	P.j. Byrne Public House	House	Attached five-bay two-storey house and pub, built c. 1860. Cranked east (front) elevation, pub to north, dwelling to south.	13826021
Proposed Protected Structure	LHS015-036	15	Owen Breer Victualler, Castlebellingham	Owen Breer Victualler	House	End-of-terrace single-bay two-storey house and shop, built c. 1880	13826023
Proposed Protected Structure	LHS015-037	15	Castlebellingham Stables, Castlebellingham	Castlebellingham Stables	Stables	Detached multiple-bay single-storey range of brick stable buildings, built c. 1880. L-plan, lower wing to east, lean-to to north end of east elevation of north wing.	13826024
Proposed Protected Structure	LHS015-038	15	Presbyterian Church, Castlebellingham	Presbyterian Church	Church	Freestanding three-bay single-storey Presbyterian church, dated 1840. Rectangular-plan.	13826025
Proposed Protected Structure	LHS015-039	15	Castlebellingham Manse	Castlebellingham Manse	Manse	Detached three-bay two-storey former manse, built c. 1880, now in use as private house.	13826026
Proposed Protected Structure	LHS015-040	15	Castlebellingham		House	Detached multiple-bay two-storey house, built c. 1840. L-plan to original house, two-storey gabled return to east of north elevation, various single-storey extensions to north	13826027
Proposed Protected Structure	LHS015-041	15	Glebe House, Stabannan	Glebe House	Curate's House	Detached three-bay two-storey over basement former glebe house, built c. 1810, now in private domestic use.	13901501

Draft Louth County Development Plan 2009 - 2015.
Record of Protected Structures.

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Proposed Protected Structure	LHS015-042	15	St.Fintan's R.C. Church, Dillonstown	St.fintan's R.c. Church	Church	Freestanding gable-fronted Roman Catholic church, built c. 1860. Rectangular-plan, sacristy to south-east	13901504
Proposed Protected Structure	LHS015-043	15	Ballygassan House / Thompson's Farm	Ballygassan House / Thompson's Farm	Hunting/fishing lodge	Detached three-bay two-storey former hunting lodge, built c. 1900, attached to earlier house to rear, now in private domestic use.	13901506
Proposed Protected Structure	LHS015-044	15	Greenmount Lodge Farmyard Complex, Greenmount	Greenmount Lodge Farmyard Complex	Farmyard Complex	Ranges of multiple-bay single-storey with attic outbuildings, built c. 1800. Ranges surround yard, outbuildings punctuated by gable-fronted breakfronts, half-dormer windows, various single-storey extensions. Greenmount Lodge replaced by recent dwelling.	13901508
Proposed Protected Structure	LHS015-045	15	Greenmount Lodge Gates, Greenmount	Greenmount Lodge Gates	Gates/railings	Cast-iron gateway, built c. 1880, comprising cast-iron gate piers capped by decorative fleur-de-lis finials, cast-iron double gates with fleuron finials, pedestrian cast-iron gates to north and south, flanked by ashlar limestone quadrant walls forming splayed entrance. Gate is to east of roadway giving access into Greenmount Lodge.	13901509
Proposed Protected Structure	LHS015-046	15	Bolie House, Williamstown	Bolie House	House	Detached three-bay two-storey house, built c. 1890. L-plan, remodelled c.1860, cantilevered porch to south c.1990, pitched roofed porch to north elevation	13901510
Proposed Protected Structure	LHS015-047	15	Spencer Hill,	Spencer Hill	Rectory	Detached five-bay three-storey over basement former rectory, built c. 1780, now in use as private house. Rectangular-plan, flat-roofed addition to north c. 1900, side entrance.	13901513
Proposed Protected Structure	LHS015-048	15	Braganstown House, Braganstown	Braganstown House	Country House	Detached five-bay two-storey house, built c. 1790, remodelled and extended in Elizabethan style, 1846. Porte cochere and double-height crennellated additions to entrance front.	13901517
Proposed Protected Structure	LHS015-049	15	Bawn	Mansfieldstown Bridge	Road Bridge	Single-arch stone road bridge, built c. 1935, over the River Glyde.	13901518
Proposed Protected Structure	LHS015-050	15	Bawn	School	School	Detached three-bay two-storey former school, built c. 1850, now in use as house. Two-storey crenellated return to centre of rear (west) elevation, single-storey crenellated bowed extension to north of west elevation, lean-to extension to south of west.	13901519
Proposed Protected Structure	LHS015-051	15	Newrath	Neary's Thatch	Thatched Cottage	Detached four bay single storey cottage, rectangular plan, gable ended, with thatched roof of oaten straw, central brick chimneystack, lobby entry, with half door, 2/2 timber sash windows, walls are stone, whitewashed.	
Proposed Protected Structure	LHS015-052	15	Annagassan	Annagassan Mill & Lace School		Annagassan Mill, Mill Wheel, Mill Race & Lace School	0
Proposed Protected Structure	LHS015-053	15	The White House□□Annagassan	The White House	House		
Proposed Protected Structure	LHS015-054	15	Main Street□□Annagassan	The Cottage	House	one of a pair of semi-detached stone cottages.	
Proposed Protected Structure	LHS015-055	15	Main Street,	The Cottage	House	one of a pair of semi-detached stone cottages.	

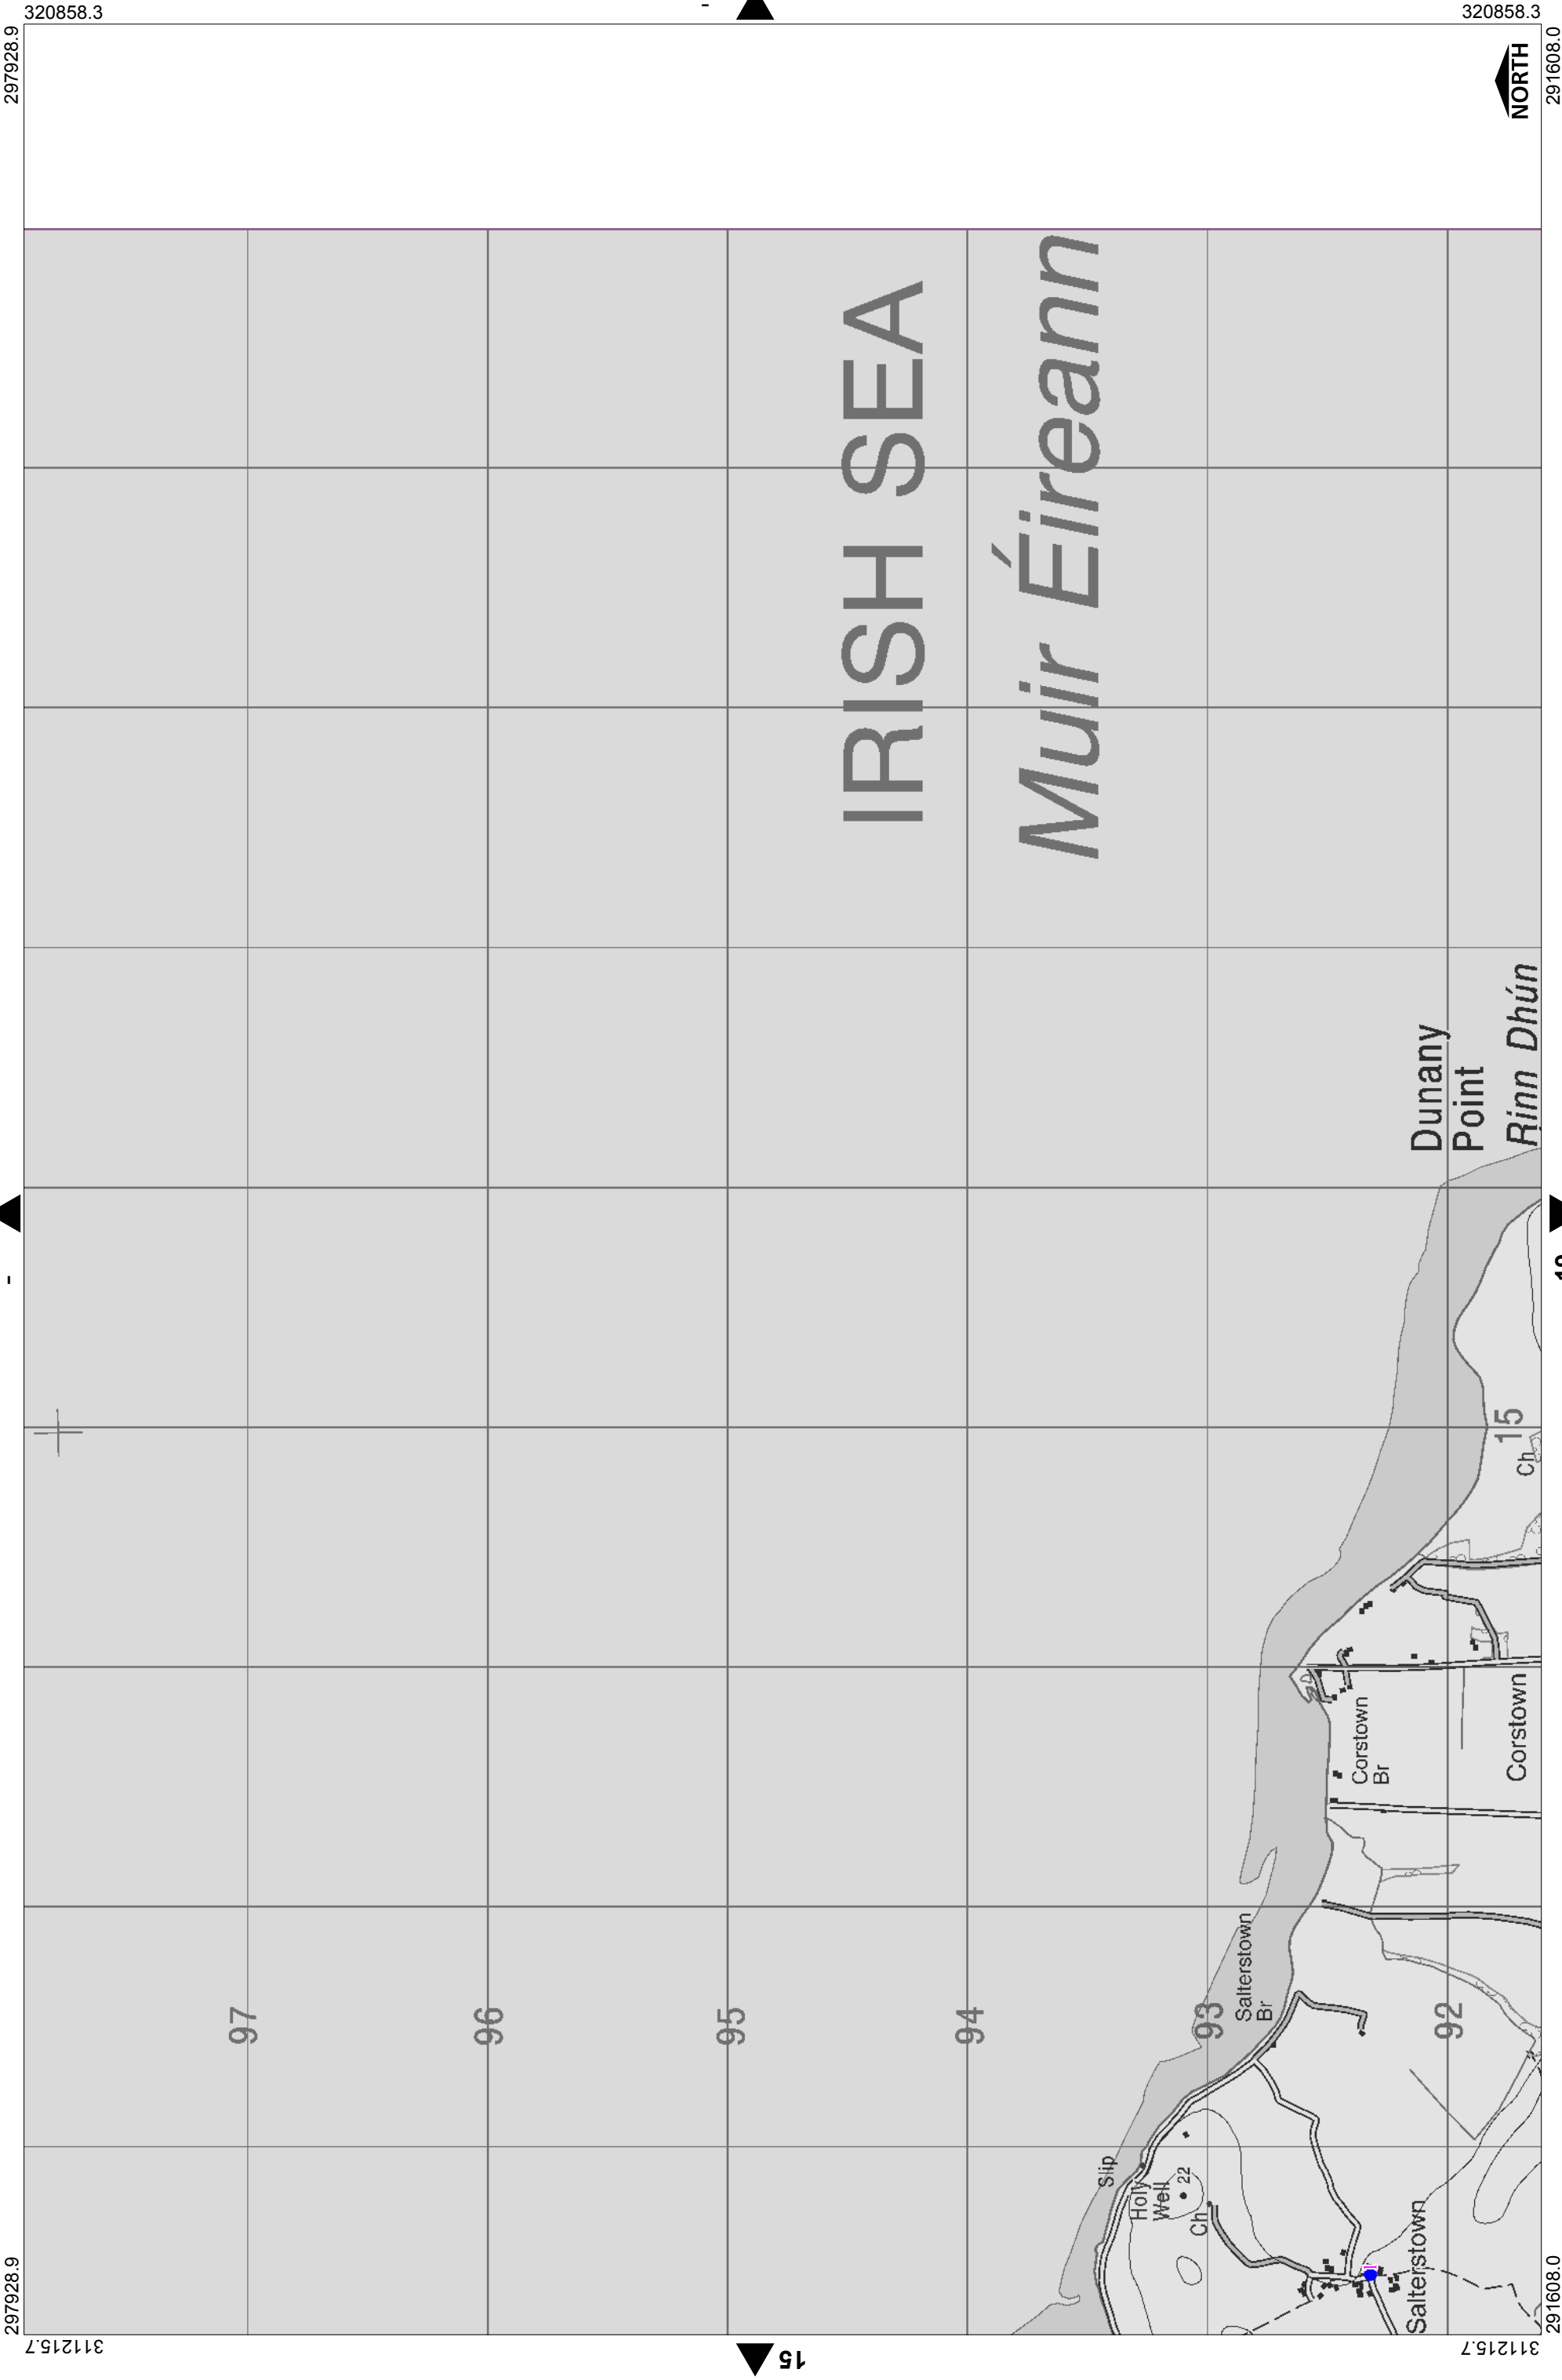



Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie

**Louth County Council
Record of Protected Structures
Sheet No 16**

Note: Details shown on this map are for information purposes only.
Further details on any item should be clarified with Louth County Council.
The map has been produced by Louth County Council with available Local Authority and Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number 2009/30/CCMA/LouthLocalAuthorities.

Not to scale when printed A3 Landscape

Protected Structure

Proposed Protected Structure

Proposed to be deleted from Register of Protected Structures


●

●

●

All Protected Structures within this boundary are in the Dundalk & Environs Plan

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Existing Protected Structure	Lhs016-001	16	Salterstown	Salterstown Thatch	Thatched Cottage	four-bay single storey thatched cottage with attic. single chimney stack, rubble stone, slate roofed outbuilding with carriage arch. built c. 1780. Rectangular-plan, projecting entrance bay to west, ruined two-bay structure attached to north. - OPW site 3	13901601

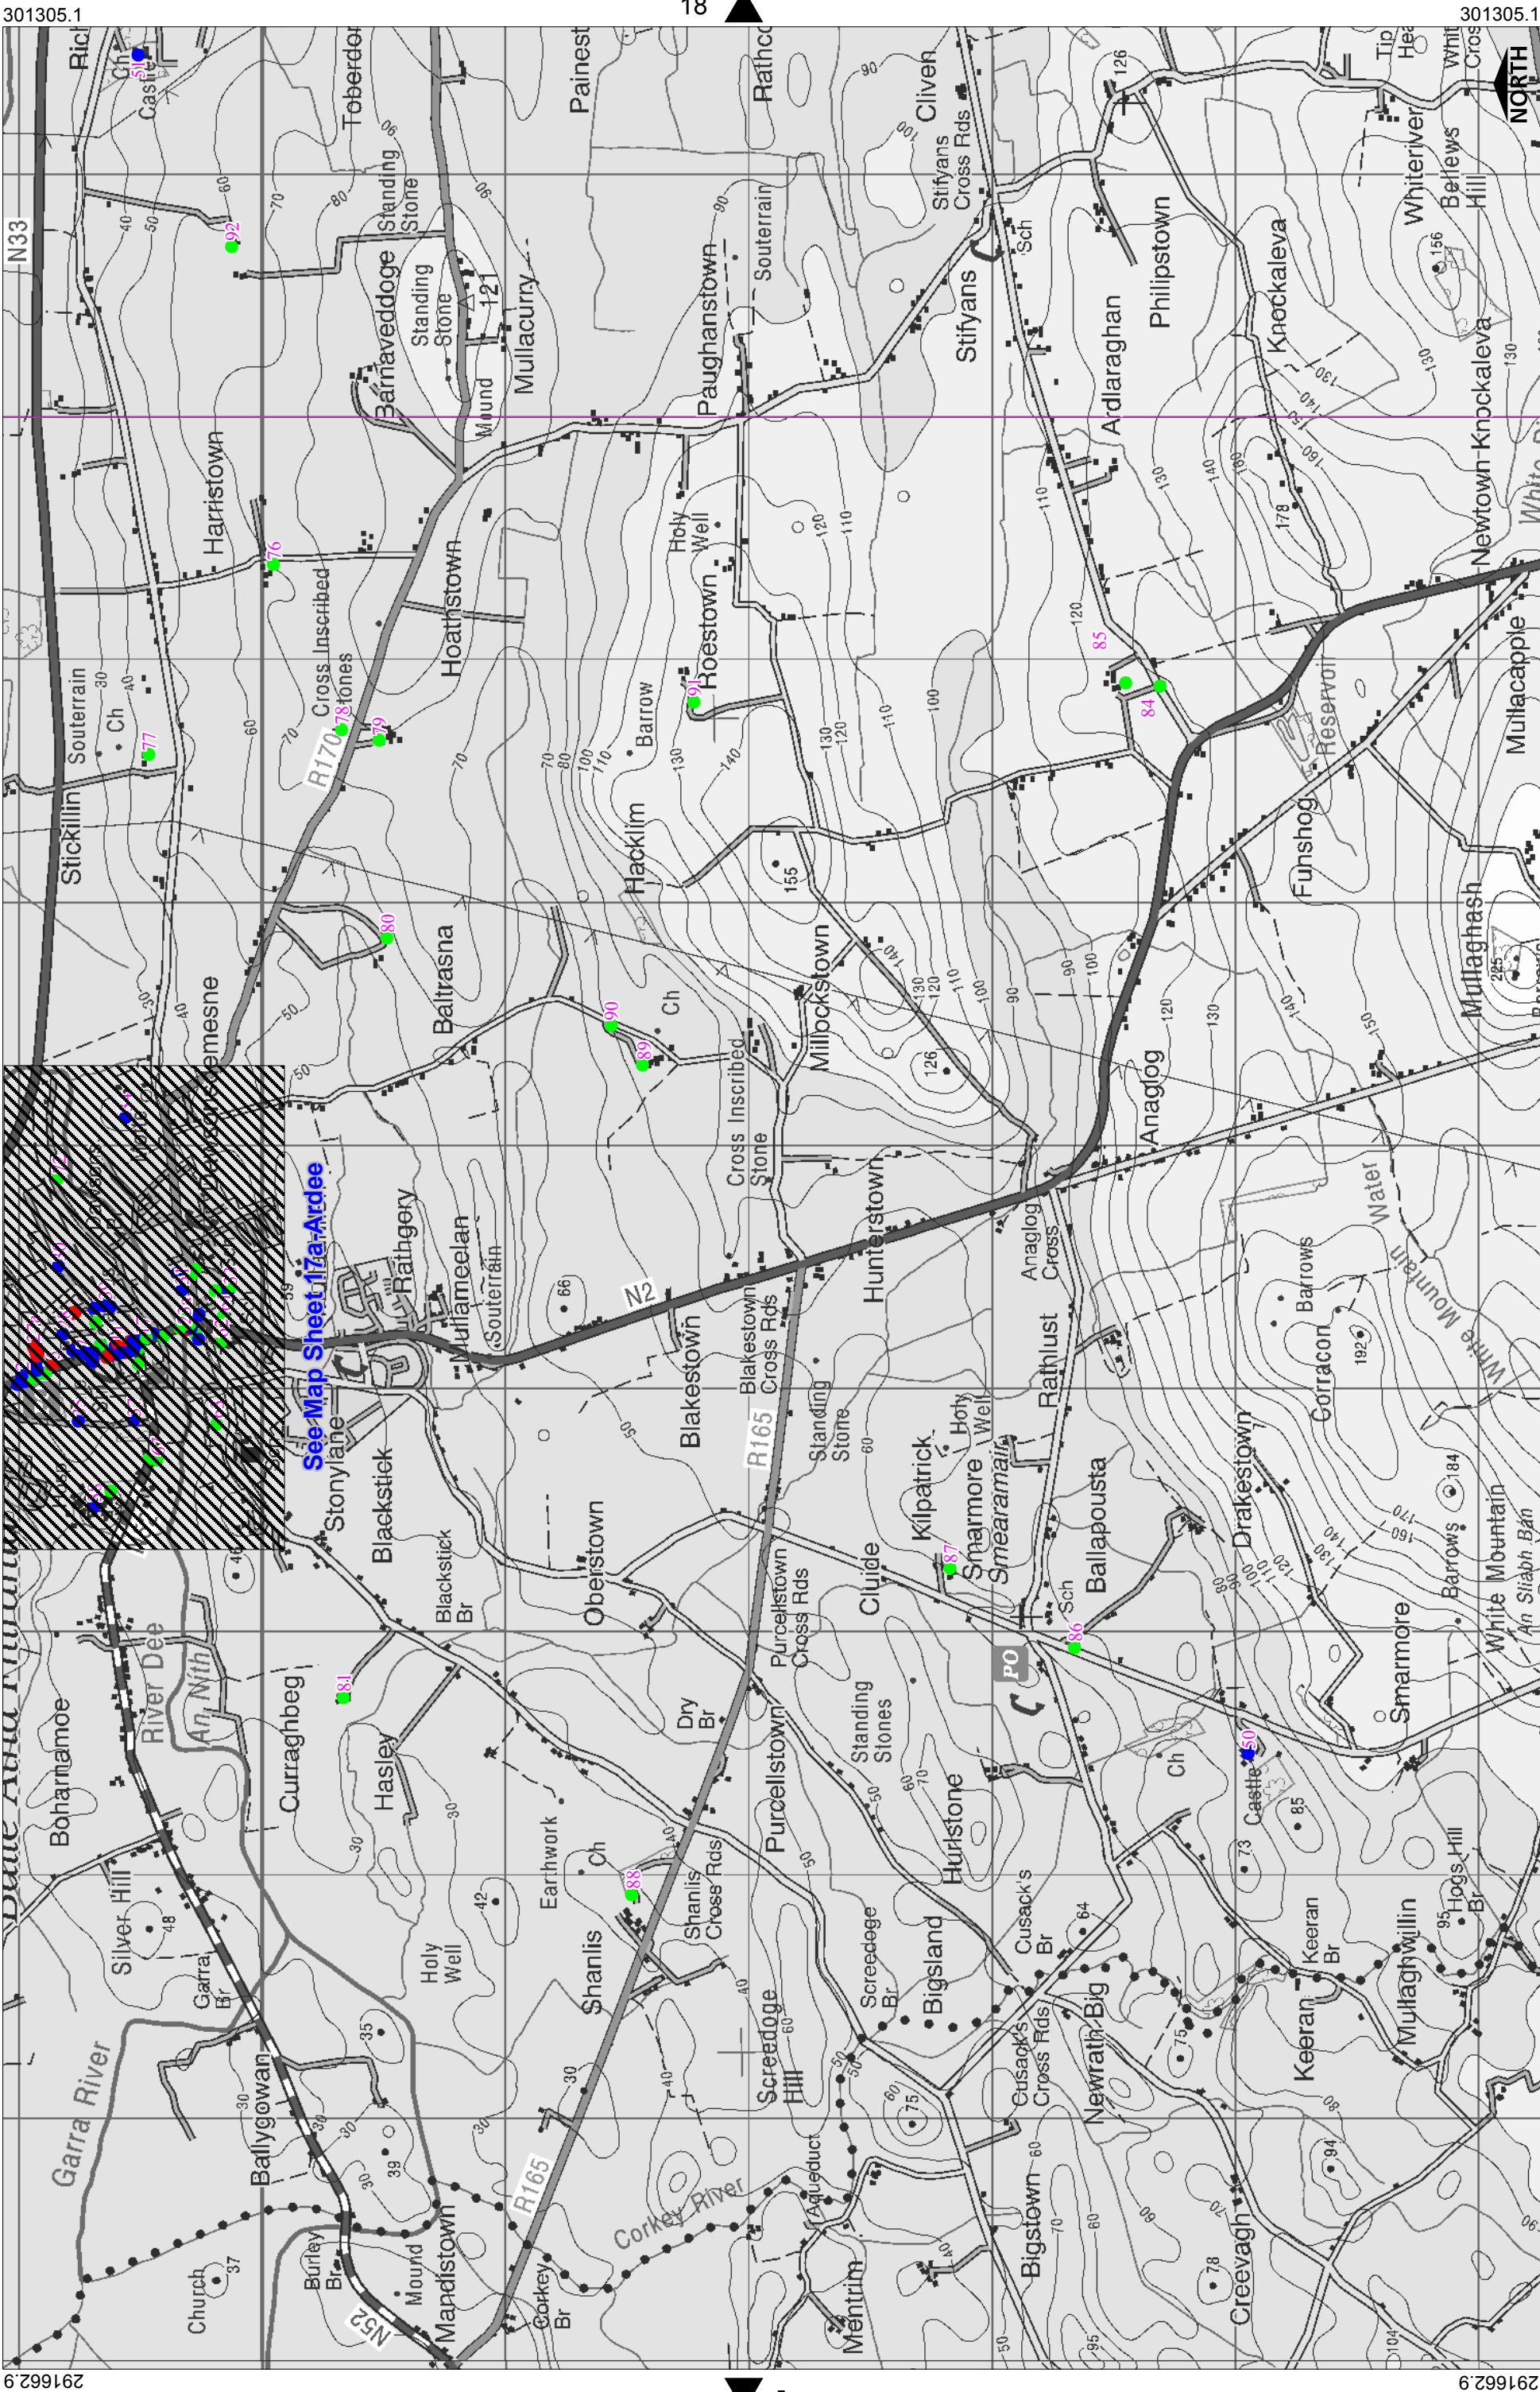


Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie

Note: Details shown on this map are for information purposes only.
Further details on any item should be clarified with Louth County Council.
The map has been produced by Louth County Council with available Local Authority and Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number 2009/30/CCMA/LouthLocalAuthorities.
Not to scale when printed A3 Landscape

Louth County Council Record of Protected Structures Sheet No 17

- Protected Structure
- Proposed Protected Structure
- Proposed to be deleted from Register of Protected Structures

All Protected Structures within this boundary are in the Dundalk & Environs Plan

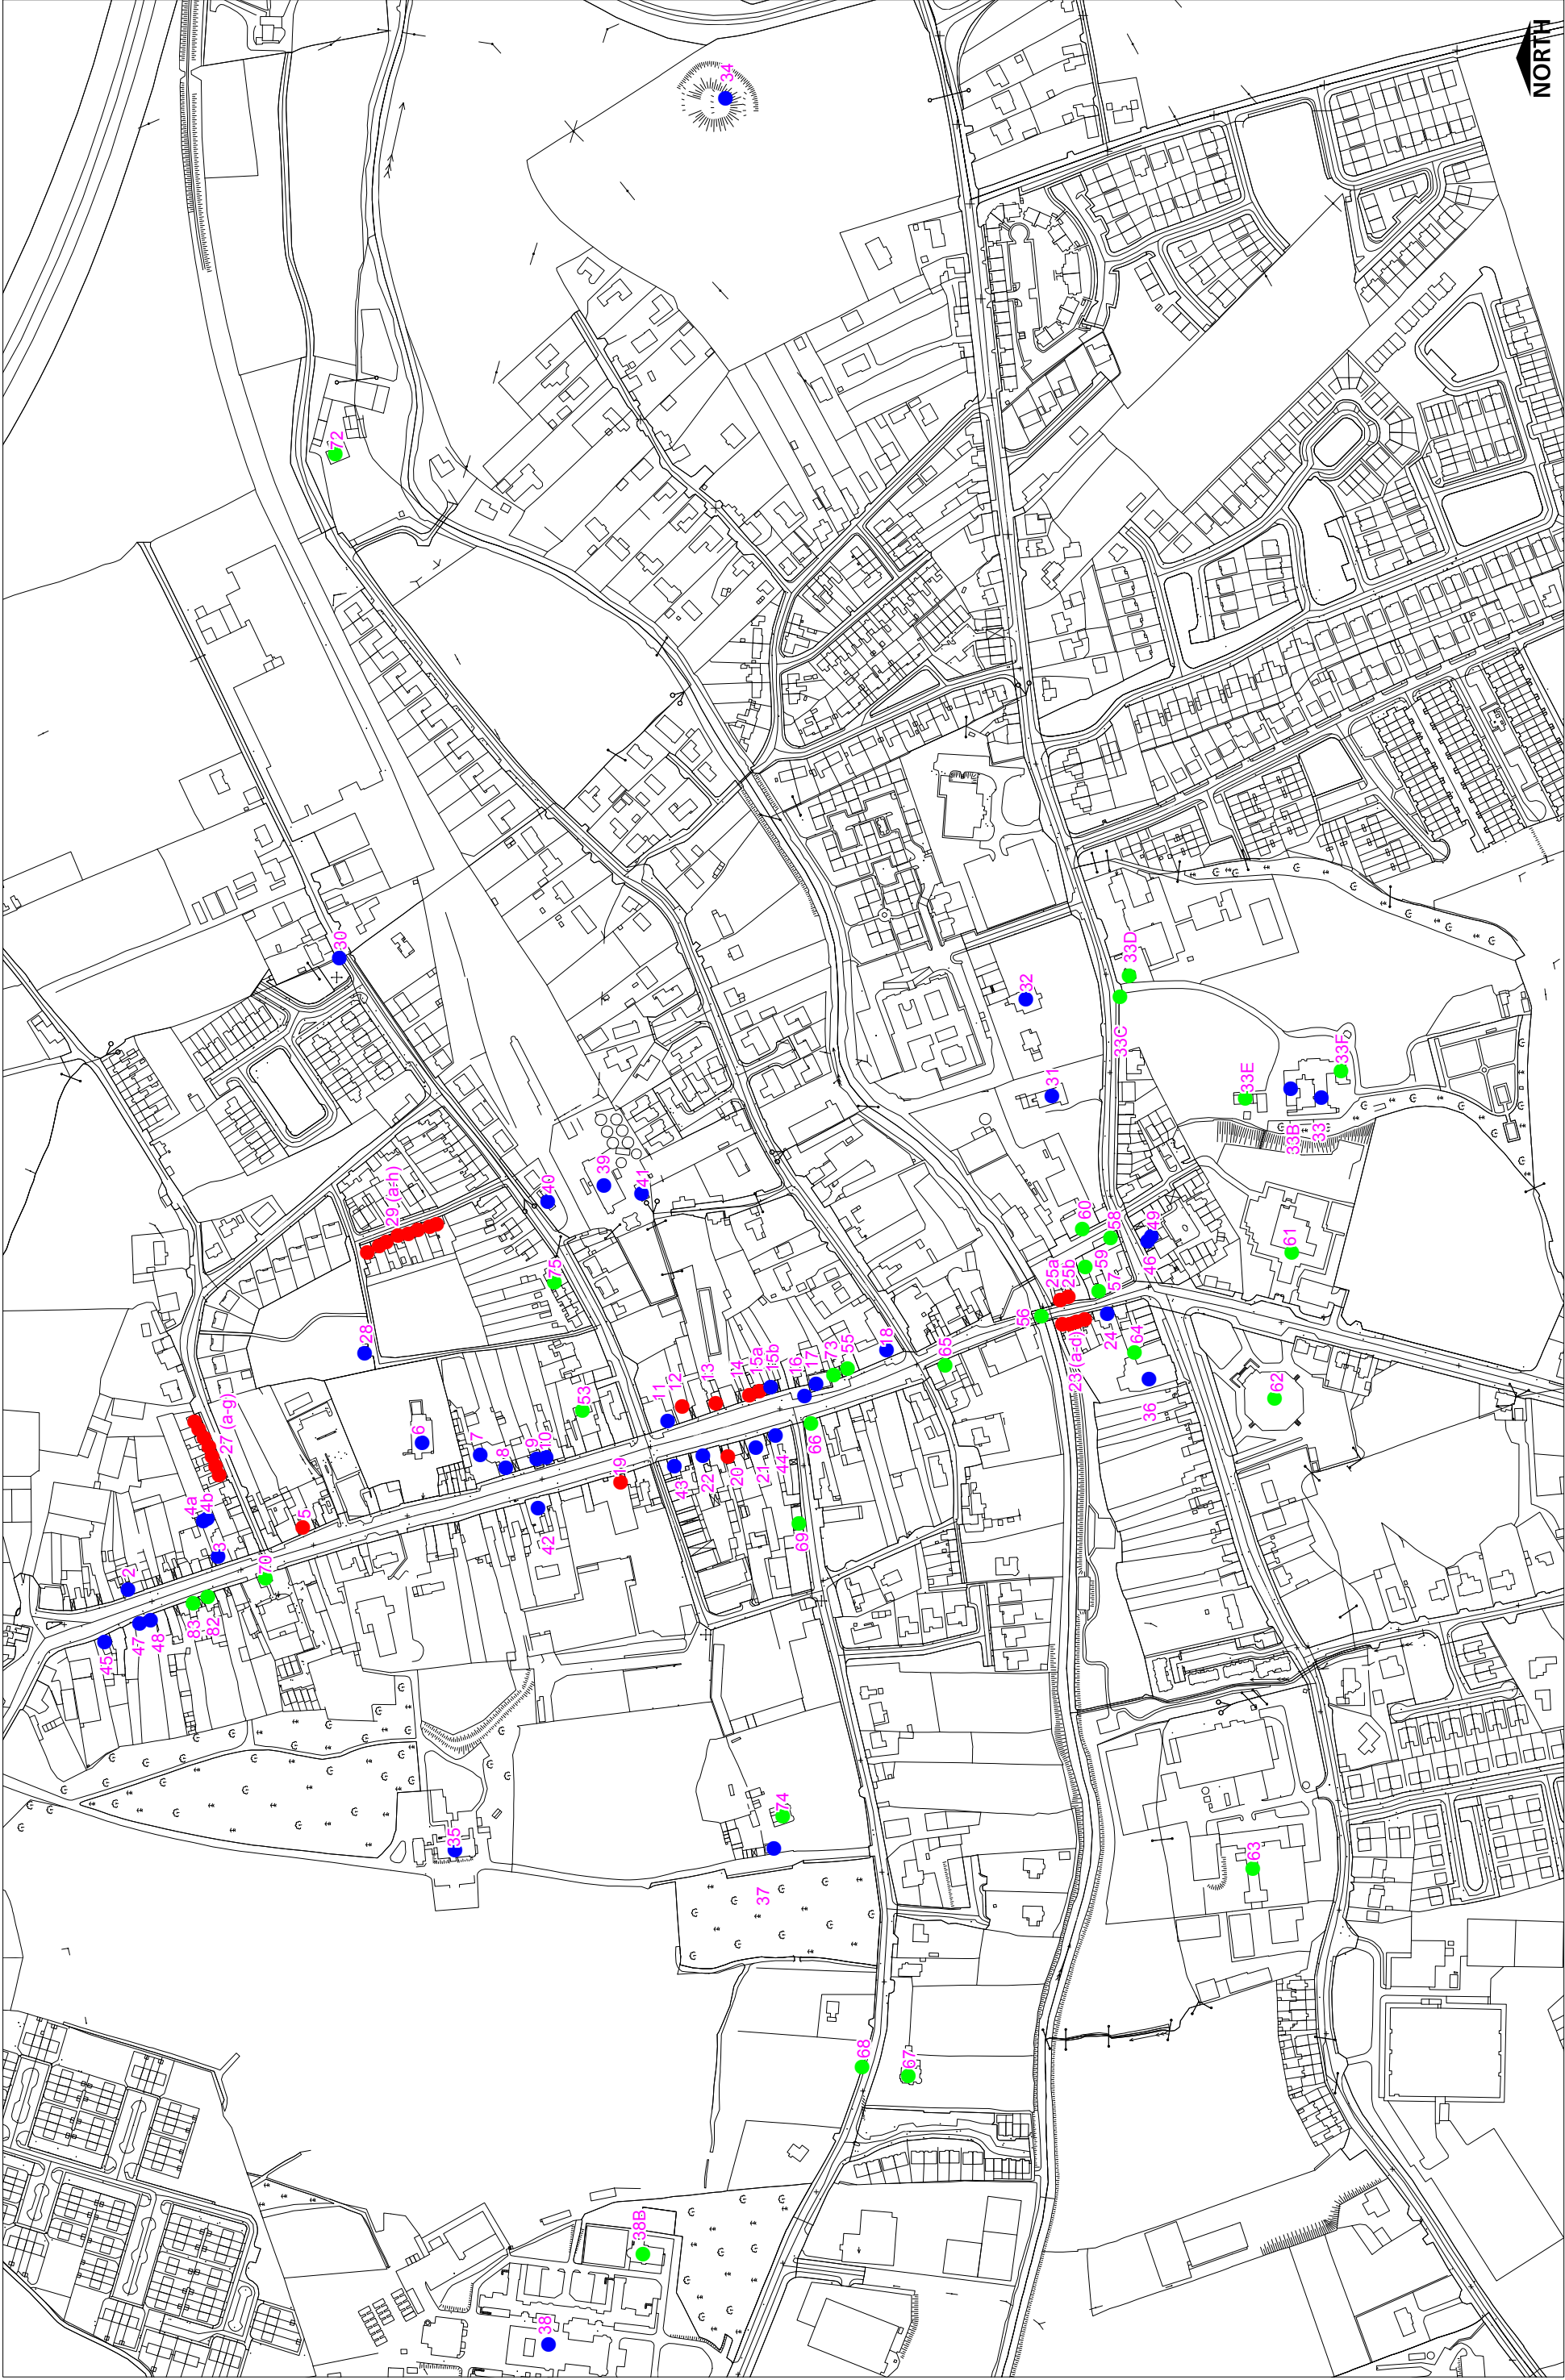

Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie



Louth County Council Record of Protected Structures Sheet No 17(a) Ardee

Note: Details shown on this map are for information purposes only.
Further details on any item should be clarified with Louth County Council.
The map has been produced by Louth County Council with available Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number 2009/00/CCLMA/LouthLocalAuthorities.

Not to scale when printed A3 Landscape

- Protected Structure
- Proposed Protected Structure
- Proposed to be deleted from Register of Protected Structures



All Protected Structures within
this boundary are in the
Dundalk & Environs Plan

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Existing Protected Structure	Lhs017-002	17	Irish Street Townparks	"J.malone"	Shop	Terraced two-bay two-storey house, built c. 1840 with original 1885 shopfront. Return, additions and outbuilding to rear	13823049
Existing Protected Structure	Lhs017-003	17	Irish Street, Townparks	Ulster Bank	Bank/financial Institution	Georgian style built c. 1910. four-bay three-storey bank. Pilastered three-bay shopfront to cash office with a broad carriage arch.	13823051
Existing Protected Structure	Lhs017-004a	17	Irish Street, Townparks	Stone Warehouse At Rear Of Ulster Bank	Warehouse	Rubble stone warehouses with brick arched heads and surrounds to windows	
Existing Protected Structure	Lhs017-004b	17	Irish Street, Townparks	Sansom Electric	Warehouse	Detached multiple-bay three-storey former corn mill, built c. 1820, now in use as offices.	13823050
Proposed To Be Deleted	Lhs017-005	17	Market Street, Townparks	First Active & Bartle Landy Financial Services	Office	Five-bay two-storey building with cement rendered front.	
Existing Protected Structure	Lhs017-006	17	Market Street, Townparks	St. Mary's Church Of Ireland	Church	Detached stone Church of Ireland church, built c. 1810, on site of earlier church. West-facing, four-bay nave, aisle to south, west front with advanced three-stage bell tower to centre.	13823052
Existing Protected Structure	Lhs017-007	17	Market Street, Townparks	Former Wesleyan Chapel	Vet Clinic	Freestanding three-bay gable-fronted single-storey former Methodist church, built 1852, now in use as kennels, attached to south to single-storey shop building. small hard Gothic building.	13823053
Existing Protected Structure	Lhs017-008	17	Market Street, Townparks	House South Of Wesleyan Chapel (J.b. Kiernan)	House	End-of-terrace three-bay two-storey former house, built c. 1840, now in use as veterinary surgery. Single- and two-storey flat-roofed extensions to rear c. 1960.	13823054
Existing Protected Structure	Lhs017-009	17	Market Street Townparks	Hatch Castle	Towerhouse	Rectangular, four-storey tower house with rounded corners. C15 or C16. Two semi circular turrets project at rear. renovated in 1837 as a dwelling.	13823055
Existing Protected Structure	Lhs017-010	17	Market Street, Townparks	Three Storey House Abutting Hatch Castle (South)	House	Four-bay three-storey former house built c. 1860, now in use as commercial premises.decorative door surround. PCV windows	13823056
Existing Protected Structure	Lhs017-011	17	Castle Street, Townparks	Bank Of Ireland	Bank/financial Institution	Corner-sited detached four-bay two-storey bank, built c. 1890, extended c. 1980. with small pavilion-like entrance blocks at each end & carriage arch to south. Single-storey hipped porches to north and south of front (west) elevation; porch to south housing cash machine.	13823001
Proposed To Be Deleted	Lhs017-012	17	Castle Street, Townparks	Kearney's Drapery Store	Shop	Five-bay two-storey building with shopfront and carriage arch. replacement windows	
Proposed To Be Deleted	Lhs017-013	17	Castle Street, Townparks	Liscou	Shop	unusual shopfront	
Proposed To Be Deleted	Lhs017-014	17	Castle Street , Townparks	"J. Kiernan " Solicitor	Office	Four-bay two-storey building with plastered façade and carriage arch	
Proposed To Be Deleted	Lhs017-015a	17	Castle Street, Townparks	House 1 South Of J.kieran Solicitor	House	Three-bay two-storey house, plastered façade with plaster quoins	
Existing Protected Structure	Lhs017-015b	17	Castle Street, Townparks	House 2 South Of J.kieran, Solicitor	House	Terraced three-bay, two-storey house, built c. 1860	13823003

Draft Louth County Development Plan 2009 - 2015.
Record of Protected Structures.

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Existing Protected Structure	Lhs017-016	17	Castle Street, Townparks	Roadside Water Pump Outside Ardee Castle	Waterpump	Freestanding cast-iron water pump, c. 1890, now disused.	
Existing Protected Structure	Lhs017-017	17	Castle Street, Townparks	Ardee Castle	Castle	Attached multiple-bay four-storey stone tower house, built c. 1600, converted to court house c. 1850. Projecting corner towers to north-west and south-west, largely rebuilt c. 1850, three-bay two-storey infill between towers c. 1850 Also known as Pippard'	13823004
Existing Protected Structure	Lhs017-018	17	Castle Street , Townparks	" Ardee Bread Company "	Shop	End-of-terrace eleven-bay two-storey former bakery, built c. 1860, now in use as builder's yard. Single-storey return to south-east c. 1950, along Tisdale Street, Edwardian shopfront with gold incised lettering	13823007
Proposed To Be Deleted	Lhs017-019	17	Castle Street , Townparks	" Lanney's "	Shop	four-bay two-storey building with replacement shopfront	
Proposed To Be Deleted	Lhs017-020	17	Castle Street , Townparks	" Ardee Fireplaces "	Shop	two-bay, two-storey building with shopfront	
Existing Protected Structure	Lhs017-021	17	Castle Street, Townparks	Sweeny Byrne/imbue	Shop	Attached six-bay two-storey former house, built c. 1850, now in use as commercial premises. Integral carriage arch to south of front (east) elevation, two-storey return and extension to rear, shops to ground floor, offices to first floor.	13823039
Existing Protected Structure	Lhs017-022	17	Castle Street, Townparks	Allied Irish Bank	Bank/financial Institution	built c. 1870, Five-bay three-storey building with decorative fanlight over door and modern renovations to shopfront. now with bank to ground floor and guest house to upper floors.	13823040
Proposed To Be Deleted	Lhs017-023a	17	Bridge Street, Townparks	Bridge St, West Side, Two Storey House 1	Terraced House	Two-bay two-storey terraced house with pebble dash finish to front and brick heads and surrounds to opes.	
Proposed To Be Deleted	Lhs017-023b	17	Bridge Street, Townparks	Bridge St, West Side, Two Storey House 2	Terraced House	Two-bay two-storey terraced house with pebble dash finish to front and brick heads and surrounds to opes. replacement windows	
Proposed To Be Deleted	Lhs017-023c	17	Bridge Street, Townparks	Bridge St, West Side, Two Storey House 3	Terraced House	Two-bay two-storey terraced house with pebble dash finish to front and brick heads and surrounds to opes. replacement windows	
Proposed To Be Deleted	Lhs017-023d	17	Bridge Street, Townparks	Bridge St, West Side, Two Storey House 4	Terraced House	Two-bay two-storey terraced house with pebble dash finish to front and brick heads and surrounds to opes. replacement windows	
Existing Protected Structure	Lhs017-024	17	Bridge Street, Townparks	"Hamill's Public House" & Attached Premises	Public House	Five-bay two-storey built c. 1900, building with art deco ceramic tiled shopfront with pub to ground floor. Elaborate pub front to south, central entrance door giving to first floor, simpler shopfront to north, integral carriage arch to north end.	13823028
Proposed To Be Deleted	Lhs017-025a	17	Bridge Street, Townparks	Bridge St, East Side, Two Storey House	Terraced House	Two-bay two-storey house with pebble-dash façade and brick heads and jambs to opes.	
Proposed To Be Deleted	Lhs017-025b	17	Bridge Street, Townparks	Bridge St, East Side	Terraced House	Two-bay two-storey house with pebble-dash façade and brick heads and jambs to opes. Replacement windows.	
Proposed To Be Deleted	Lhs017-027a	17	Market House Lane, Townparks	Market House Lane Cottages No 1	Terraced House	1932 terraced cottage, three-bay with central door	

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Proposed To Be Deleted	Lhs017-027b	17	Market House Lane, Townparks	Market House Lane Cottages No 2	Terraced House	1932 terraced cottage, three-bay with central door	
Proposed To Be Deleted	Lhs017-027c	17	Market House Lane, Townparks	Market House Lane Cottages No 3	Terraced House	1932 terraced cottage, three-bay with central door	
Proposed To Be Deleted	Lhs017-027d	17	Market House Lane, Townparks	Market House Lane Cottages No 4	Terraced House	1932 terraced cottage, three-bay with central door	
Proposed To Be Deleted	Lhs017-027e	17	Market House Lane, Townparks	Market House Lane Cottages No 5	Terraced House	1932 terraced cottage, three-bay with central door	
Proposed To Be Deleted	Lhs017-027f	17	Market House Lane, Townparks	Market House Lane Cottages No 6	Terraced House	1932 terraced cottage, three-bay with central door	
Proposed To Be Deleted	Lhs017-027g	17	Market House Lane, Townparks	Market House Lane Cottages No 7	Terraced House	1932 terraced cottage, three-bay with central door	
Existing Protected Structure	Lhs017-028	17	College Park , Cappocksgreen	Chantry College	Ruin	from 1487, only southern part survives, a rectangular three-storey structure with high pointed gables.	
Proposed To Be Deleted	Lhs017-029a	17	St. Vincent's Road, Townparks	St. Vincent's Road Cottages 1	Cottage	c. 1930, terraced cottage, three-bay with central door	
Proposed To Be Deleted	Lhs017-029b	17	St Vincent's Road, Townparks	St Vincent's Road Cottages 2	Cottage	c. 1930, terraced cottage, three-bay with central door	
Proposed To Be Deleted	Lhs017-029c	17	St Vincent's Road, Townparks	St Vincent's Road Cottages 3	Cottage	c. 1930, terraced cottage, three-bay with central door	
Proposed To Be Deleted	Lhs017-029d	17	St Vincent's Road, Townparks	St Vincent's Road Cottages 4	Cottage	c. 1930, terraced cottage, three-bay with central door	
Proposed To Be Deleted	Lhs017-029e	17	St Vincent's Road, Townparks	St Vincent's Road Cottages 5	Cottage	c. 1930, terraced cottage, three-bay with central door	
Proposed To Be Deleted	Lhs017-029f	17	St Vincent's Road, Townparks	St Vincents Road Cottages 6	Cottage	c. 1930, terraced cottage, three-bay with central door	
Proposed To Be Deleted	Lhs017-029g	17	St Vincent's Road, Townparks	St Vincents Road Cottages 7	Cottage	c. 1930, terraced cottage, three-bay with central door	
Proposed To Be Deleted	Lhs017-029h	17	St Vincent's Road, Townparks	St Vincents Road Cottages 8	Cottage	c. 1930, terraced cottage, three-bay with central door	
Existing Protected Structure	Lhs017-030	17	Cappocksgreen	Cappock's Gate, Ardee Town Wall	Fortifications	remnants of Medieval Town Wall	
Existing Protected Structure	Lhs017-031	17	Moore Hall Townparks	De La Salle Monastery	Monastery	Detached five-bay two-storey monastery with decorative doorcase built c. 1890. T-plan with central breakfront to south block (front elevation), metal fire escape to north-east of south block, single-storey pitched roof service wing to north.	13823013

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Existing Protected Structure	Lhs017-032	17	Moore Hall Townparks	Parochial House	House	Detached three-bay two-storey parochial house, built c. 1870. with hipped roof and bracketed eaves, incl courtyard buildings. replacement windows. Square on plan, two-storey returns to north, single-storey flat-roofed entrance porch to south c. 1900.	13823014
Existing Protected Structure	Lhs017-033	17	Moore Hall, Townparks	Convent Of Mercy	Convent/nunnery	Attached five-bay two-storey stone convent school, built c. 1855	13823018
Existing Protected Structure	LHS017-033B	17	Townparks	Convent Of Mercy Gate Lodge	Gate Lodge	Detached single-storey with attic former gate lodge, built c. 1860,	13823016
Proposed Protected Structure	LHS017-033C	17	Moorhall Street□□Townparks	Convent Of Mercy Gates	Gates/railings	Gateway, built c. 1860. Pair of limestone ashlar octagonal gate piers, quadrant wing walls, gabled pedestrian entrance gateway to east. Piers with projecting chamfered plinths, splayed string courses, quatrefoil carved frieze panels, splayed cornice caps;	13823015
Proposed Protected Structure	LHS017-033D	17	Moorhall Street, □□Townparks	Convent Of Mercy Gate Lodge	Gate Lodge	Detached single-storey with attic former gate lodge, built c. 1860, now in use as private residence. Canted five-sided extension to east.	13823016
Proposed Protected Structure	LHS017-033E	17	TOWNPARKS	Convent Of Mercy (Former School)	School	Detached single-storey former school, built c. 1920, now in use as a community facility. Two four-bay buildings arranged in L-plan with flat-roofed corrugated-iron garage in south-east corner.	13823017
Proposed Protected Structure	LHS017-033F	17	Convent of Mercy Chapel, Townparks	Convent Of Mercy Chapel	Chapel	Attached stone chapel, built c. 1870. Two-bay aisle to north between main convent and square-plan two-storey gabled stair tower to north-west, projecting single-storey gabled porch to south-west.	13823020
Existing Protected Structure	Lhs017-034	17	Dawsons Demesne	Castle Guard Fort	Motte	from 1185. During C18plan appears to have been of an octagonal surrounded by an octagonal curtain wall. Two ramparts and ditches encircled the motte.	
Existing Protected Structure	Lhs017-035	17	Fair Green Road, Townparks	St. Joseph's Hospital / Ardee House	Country House	Detached seven-bay three-storey over basement former house, built c. 1780, now in use as hospital.	13823035
Existing Protected Structure	Lhs017-036	17	John Street, Townparks	Old St. Mary's Church	Church	Freestanding former Roman Catholic church, built 1829, remodelled 1860, deconsecrated 1974, now used as shop.	13823026
Existing Protected Structure	Lhs017-037	17	Kells Road (off)Townparks	Town House	Towerhouse	C15 rectangular stone castle, three-storeys.	
Existing Protected Structure	Lhs017-038	17	Kells Road Townparks	St. Briget's Hospital	Hospital	Detached multiple-bay, red brick, two-storey hospital, built 1933. Designed by architect HT Wright.	13823032
Proposed Protected Structure	LHS017-038B	17	Saint Brigid's Hospital Chapel, Townparks	Saint Brigid's Hospital Chapel	Chapel	Detached six-bay single-cell chapel, built 1933. Rectangular-plan with semi-circular chancel to north and flat-roofed sacristy to north-east.	13823033
Existing Protected Structure	Lhs017-039	17	O'Carroll Street , Dawsons Demesne	Former Railway Station Building	Railway Station	Detached multiple-bay single-storey former railway station, built c. 1880, now in use as commercial premises.	13823060
Existing Protected Structure	Lhs017-040	17	O'Carroll Street , Dawsons Demesne	Two Storey Red Brick House .	House	Detached three-bay single-storey with dormer attic, red brick house with yellow brick trim. Former station master's house, built c. 1880, now in use as private residence. Gabled dormer over central bay, return to east.	13823059


Draft Louth County Development Plan 2009 - 2015.
Record of Protected Structures.

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Existing Protected Structure	Lhs017-041	17	O'Carroll Street , Dawsons Demesne	Former Railway Locomotive Shed	Locomotive Shed	Three-bay, single storey building of squared rubble, arch headed windows with yellow brick surrounds.	13823060
Existing Protected Structure	Lhs017-042	17	Castle Street, Townparks	V1 Clothing	Shop	Attached three-bay two-storey house, built c. 1860, remodelled c. 1950, now with shop to ground floor. Two-storey return to rear. Decorative plaster surrounds to windows.	13823062
Existing Protected Structure	Lhs017-043	17	Castle Street , Townparks	Decafe	Shop	Three-bay, two-storey, red brick gable fronted house with brick detail at apex, built c. 1915. Replacement windows at first floor. Now in use as café and flats.	13823041
Existing Protected Structure	Lhs017-044	17	Castle Street Townparks	Ferdia Arms	Public House	Georgian house with fanlight Corner-sited attached five-bay two-storey former house, built c. 1800, now in use as public house and restaurant. L-plan, six-bay return to Barrett's Lane with integral carriage arch to west end.	13823038
Existing Protected Structure	Lhs017-045	17	Irish St , Townparks	Anderson's	Public House	End-of-terrace two-bay two-storey house, built c. 1840, formerly also in use as shop and public house. Integral shopfront to ground floor, two-storey return to north-west, sash windows with architraves	13823045
Existing Protected Structure	Lhs017-046	17	William Street□□Townparks	William Street	House	Terraced three-bay two-storey house built c. 1830. With decorative fanlight, doorcase carriage arch and sash windows. single-storey lean-to return to south-west (rear) elevation, single-storey flat-roofed extension centre rear	13823021
Existing Protected Structure	Lhs017-047	17	Irish St , Townparks	Four-bay House With Fanlight	House	End-of-terrace four-bay two-storey house, built c. 1800. decorative fanlight, plastered façade and sash windows.	13823047
Existing Protected Structure	Lhs017-048	17	20 Irish Street Townparks	Three-bay House With Fanlight	House	Terraced three-bay two-storey house, built c. 1840. With decorative fanlight and carriage arch, plastered façade,sash windows.	13823048
Existing Protected Structure	Lhs017-049	17	William Street Townparks	" Annies "	House	terraced three-bay, two-storey house, with modern shopfront, decorative fanlight, doorcase, and carriage arch, replacement windows at first floor.	13823022
Existing Protected Structure	Lhs017-050	17	Smarmore	Smarmore Castle	Towerhouse	Detached multiple-bay house, built c. 1740, now used as guest house. Irregular plan, medieval tower house, c. 1320, to centre of east elevation, three-bay two-storey wing to south and three-bay two-storey wing to north, c. 1770.	13901701
Existing Protected Structure	Lhs017-051	17	Richardstown	Richardstown Castle & Gate Lodge	House	Detached three-bay three-storey house, built c. 1770. Fourteenth century tower house, four-storeys with four round corner towers to south, extensions to rear (west) elevation c. 1860.	13901712
Proposed Protected Structure	LHS017-053	17	Warehouse, Market Street□□Townparks	Warehouse	Warehouse	Detached four-bay three-storey warehouse, built c. 1850.	13823057
Proposed Protected Structure	LHS017-055	17	Sheridan Services Castle Street□□	Sheridan Services	House	Terraced five-bay two-storey house, built c. 1840. Integral carriage arch to north, shopfront inserted to south c. 1970, two-storey extension to east, further additions to north and east c. 1970.	13823006
Proposed Protected Structure	LHS017-056	17	Bridge Street□□Townparks	Bridge Street Bridge	Road Bridge	Single-span road bridge over river, built c. 1860.	13823008
Proposed Protected Structure	LHS017-057	17	Bridge Street□□Townparks	Ardee Clinic	House	Attached five-bay two-storey house, built c. 1870, now also in use as clinic. Northern most bay angled to follow streetline, two-storey rendered pitched and flat roof returns to rear (east).	13823009
Proposed Protected Structure	LHS017-058	17	Moorhall□□Townparks		Granary	Corner-sited attached five-bay three-storey warehouse, built c. 1870, now undergoing renovation.	13823010

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Proposed Protected Structure	LHS017-059	17	Moorhall□□Townparks	Bridge Leisure	Granary	Attached six-bay three-storey gable-fronted former warehouse, built c. 1870, now in use as apartments and amusement arcade. Rectangular-plan, westernmost two-bays angled, single-storey flat-roofed extension to north c. 1970.	13823011
Proposed Protected Structure	LHS017-060	17	Odea Agri Seeds Limited, Moorhall□□	Odea Agri Seeds Limited	Warehouse	Attached multiple-bay three-storey gable-fronted warehouse, built c. 1860. L-plan with attached in-situ concrete warehouse c.1960 to north incorporating west wall of part of original warehouse, further in-situ concrete pitched roof range to east.	13823012
Proposed Protected Structure	LHS017-061	17	National School, Drogheda Road□□Townparks	Ardee Monastery National School	School	Detached multiple-bay single-storey school, built 1938.	13823023
Proposed Protected Structure	LHS017-062	17	John Street□□	The Church Of The Nativity Of Our Lady	Church	Detached multi-bay Roman Catholic church, built 1974. Octagonal plan, flat-roofed main entrance to east with cantilevered canopy, secondary entrances to north, south and west.	13823024
Proposed Protected Structure	LHS017-063	17	Ardee Workhouse John Street	Ardee Workhouse/vocational School/farrels	Factory	Detached T-plan multiple-bay former workhouse, built c. 1850, later used as vocational school, now in commercial use.	13823025
Proposed Protected Structure	LHS017-064	17	John Street□□Townparks		Gates/railings	Freestanding stone gateway, built c. 1860. Segmental-headed opening leading from carpark to south to stone steps to north descending to graveyard. Atdjoining St Mary's Church - Now Shop.	13823027
Proposed Protected Structure	LHS017-065	17	Cuchulainn House, Bridge Street□□	Cuchulainn House	House	Attached five-bay three-storey former house, built c. 1800, now in use as flats. U-plan, lower two-storey extension to west c. 1900.	13823029
Proposed Protected Structure	LHS017-066	17	Sizzler's/The Barber Shop, Castle Street	Sizzler's/the Barber Shop	House	Corner-sited attached four-bay two-storey house, built c. 1830, also in use as shops	13823030
Proposed Protected Structure	LHS017-067	17	The Old Rectory, Jervis Street□□	The Old Rectory	Rectory	Detached three-bay two-storey former rectory, built c. 1910, now in use as guest house.	13823031
Proposed Protected Structure	LHS017-068	17	Jervis Street□□Townparks		Gates/railings	Freestanding gates, c. 1860. Squared-and-coursed rubble stone square piers with galleting, pyramidal caps, uncoursed rubble stone field boundary walls, with roughly-dressed stone copings, extending to east and west. Wrought-iron gates with latch.	13823034
Proposed Protected Structure	LHS017-069	17	Barret's Lane,□□Townparks		Store	Attached six-bay two-storey stone former store, built c. 1830.	13823037
Proposed Protected Structure	LHS017-070	17	Sir Frederick Foster Memorial, Market Square,□□	Sir Frederick Foster Memorial	Monument	Freestanding stone monument, erected 1861.	13823042
Proposed Protected Structure	LHS017-071	17	Fair View□□Townparks		House	Detached three-bay two-storey house, built c. 1840. Two-bay two-storey addition to south c. 1900, two-bay single-storey addition to west.	13823046
Proposed Protected Structure	LHS017-072	17	Cappocksgreen	Manor Mill / Leg Mill / Meadow Mill	House	Detached three-bay two-storey former mill house, built c. 1850. Two-storey return to rear (east), single-storey flat-roofed extension to south-west corner	13823061
Proposed Protected Structure	LHS017-073	17	Castle Street,□□Townparks		House	Terraced two-bay two-storey house, built c. 1840. Two-storey return to east partially engaged with castle to north.	13823005

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Proposed Protected Structure	LHS017-074	17	Jervis Street, □□Townparks		House	Detached three-bay two-storey house with full-height canted bays flanking entrance, built c. 1900, now disused.	13823036
Proposed Protected Structure	LHS017-075	17	Lambs Lane, □□	Saint Joseph's Terrace	House	Terraced three-bay two-storey house, built c. 1920. Two-storey flat-roofed extension to rear (north) c. 1960	13823058
Proposed Protected Structure	LHS017-076	17	Harristown House, Harristown	Harristown House	Country House	Detached three-bay two-storey with attic house, built c. 1810. Rectangular-plan, full-height canted bay windows to east and west of south elevation, entrance porch to south elevation, lean-to extension to north, pitched roof gable-fronted dormered to attic.	13901715
Proposed Protected Structure	LHS017-077	17	Stickilllin House, Stickilllin	Stickilllin House	House	Detached three-bay two-storey Arts and Crafts style house, built 1912. Two storey lean to veranda to south elevation.	13901716
Proposed Protected Structure	LHS017-078	17	Markaville House, Harristown	Markaville House	House	Detached five-bay two-storey house, built c. 1780. Rectangular-plan, single-storey extension to east	13901717
Proposed Protected Structure	LHS017-079	17	Hoathstown House, Hoathstown	Hoathstown House	Farm House	Detached three-bay single-storey house, built c. 1890, four-bay two-storey extension south-east, c. 1920, having gable-fronted breakfront to north and east elevations and two-storey box bays projecting from gables, two-storey crenellated extension to rear	13901718
Proposed Protected Structure	LHS017-080	17	Baltrasna House, Stickilllin	Baltrasna House	Country House	Detached five-bay two-storey over basement house, built c. 1870	13901719
Proposed Protected Structure	LHS017-081	17	Curraghbeg House,	Curraghbeg House	Country House	Detached seven-bay two-storey house, built c.1750. Lean-to cat-slide roofed extension to west of north elevation, pitched two-storey return to east of north elevation, slight projecting entrance porch to south	13901720
Proposed Protected Structure	LHS017-082	17	Irish Street, □□Townparks		House	Terraced two-bay two-storey house, built c. 1840. Shopfront to north ground floor c. 1970.	13823043
Proposed Protected Structure	LHS017-083	17	Irish Street, □□Townparks		House	Terraced three-bay two-storey house, built c. 1840. Integral carriage arch to south, entrance to house to north.	13823044
Proposed Protected Structure	LHS017-084	17	Ashville House Gate Lodge, Funshog	Ashville House Gate Lodge	Gate Lodge	Detached three-bay two-storey former gate lodge, built c. 1840, now in private domestic use. Rectangular-plan, projecting gable-fronted full-height entrance bay to north, single-storey flat asphalt roofed extension to south	13901702
Proposed Protected Structure	LHS017-085	17	Ashville House, Funshog		Country House	Detached five-bay single-storey house, built c. 1840. T-plan, projecting glazed porch to east, pitched roofed porch to west, single-bay hipped roof projecting to north.	13901703
Proposed Protected Structure	LHS017-086	17	Former School Master's House, Smarmore	Former School Master's House	House	Detached three-bay two-storey stone former school master's house, built 1867, now in private domestic use. T-plan, gable-fronted extension to east of north elevation c. 1970, single-storey flat-roofed extension to east elevation.	13901704
Proposed Protected Structure	LHS017-087	17	Kilpatrick House, Kilpatrick	Kilpatrick House	Country House	Detached four-bay two-storey house, built c. 1860. T-plan, single-bay hipped roofed breakfronts to south of east and west elevations, canted-bay to ground floor of south breakfront, entrance porch to west elevation, two-storey return with lean-to entrance	13901705
Proposed Protected Structure	LHS017-088	17	Shanlis House, Shanlis	Shanlis House	Country House	Detached five-bay two-storey over basement house, built 1858. Projecting entrance porch to centre east elevation.	13901706

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Proposed Protected Structure	LHS017-089	17	Kildemook House, Millockstown	Kildemook House	Curate's House	Detached five-bay three-storey over basement former rectory, built c. 1780, now in use as private house. Single-storey flat-roofed extension and hipped roof porch to west.	13901708
Proposed Protected Structure	LHS017-090	17	Kildemook House Gate Lodge, Millockstown	Kildemook House Gate Lodge	Gate Lodge	Detached two-bay single-storey gate lodge, built c. 1820, no longer in use.	13901709
Proposed Protected Structure	LHS017-091	17	Roestown House, Roestown	Roestown House	House	Detached three-bay two-storey house, built c. 1850, incorporating fabric of eighteenth century building, remodelled and replacement fittings inserted, c. 1920. L-plan, returning four-bays to north, gable-fronted central breakfront to north elevation, two-	13901710
Proposed Protected Structure	LHS017-092	17	Toberdoney House, Toberdoney	Toberdoney House	House	Detached three-bay two-storey house, built c. 1820. L-plan, two-bay two-storey to south of east elevation, single-storey addition to south-west, entrance door at north-east angle under lean-to porch	13901714

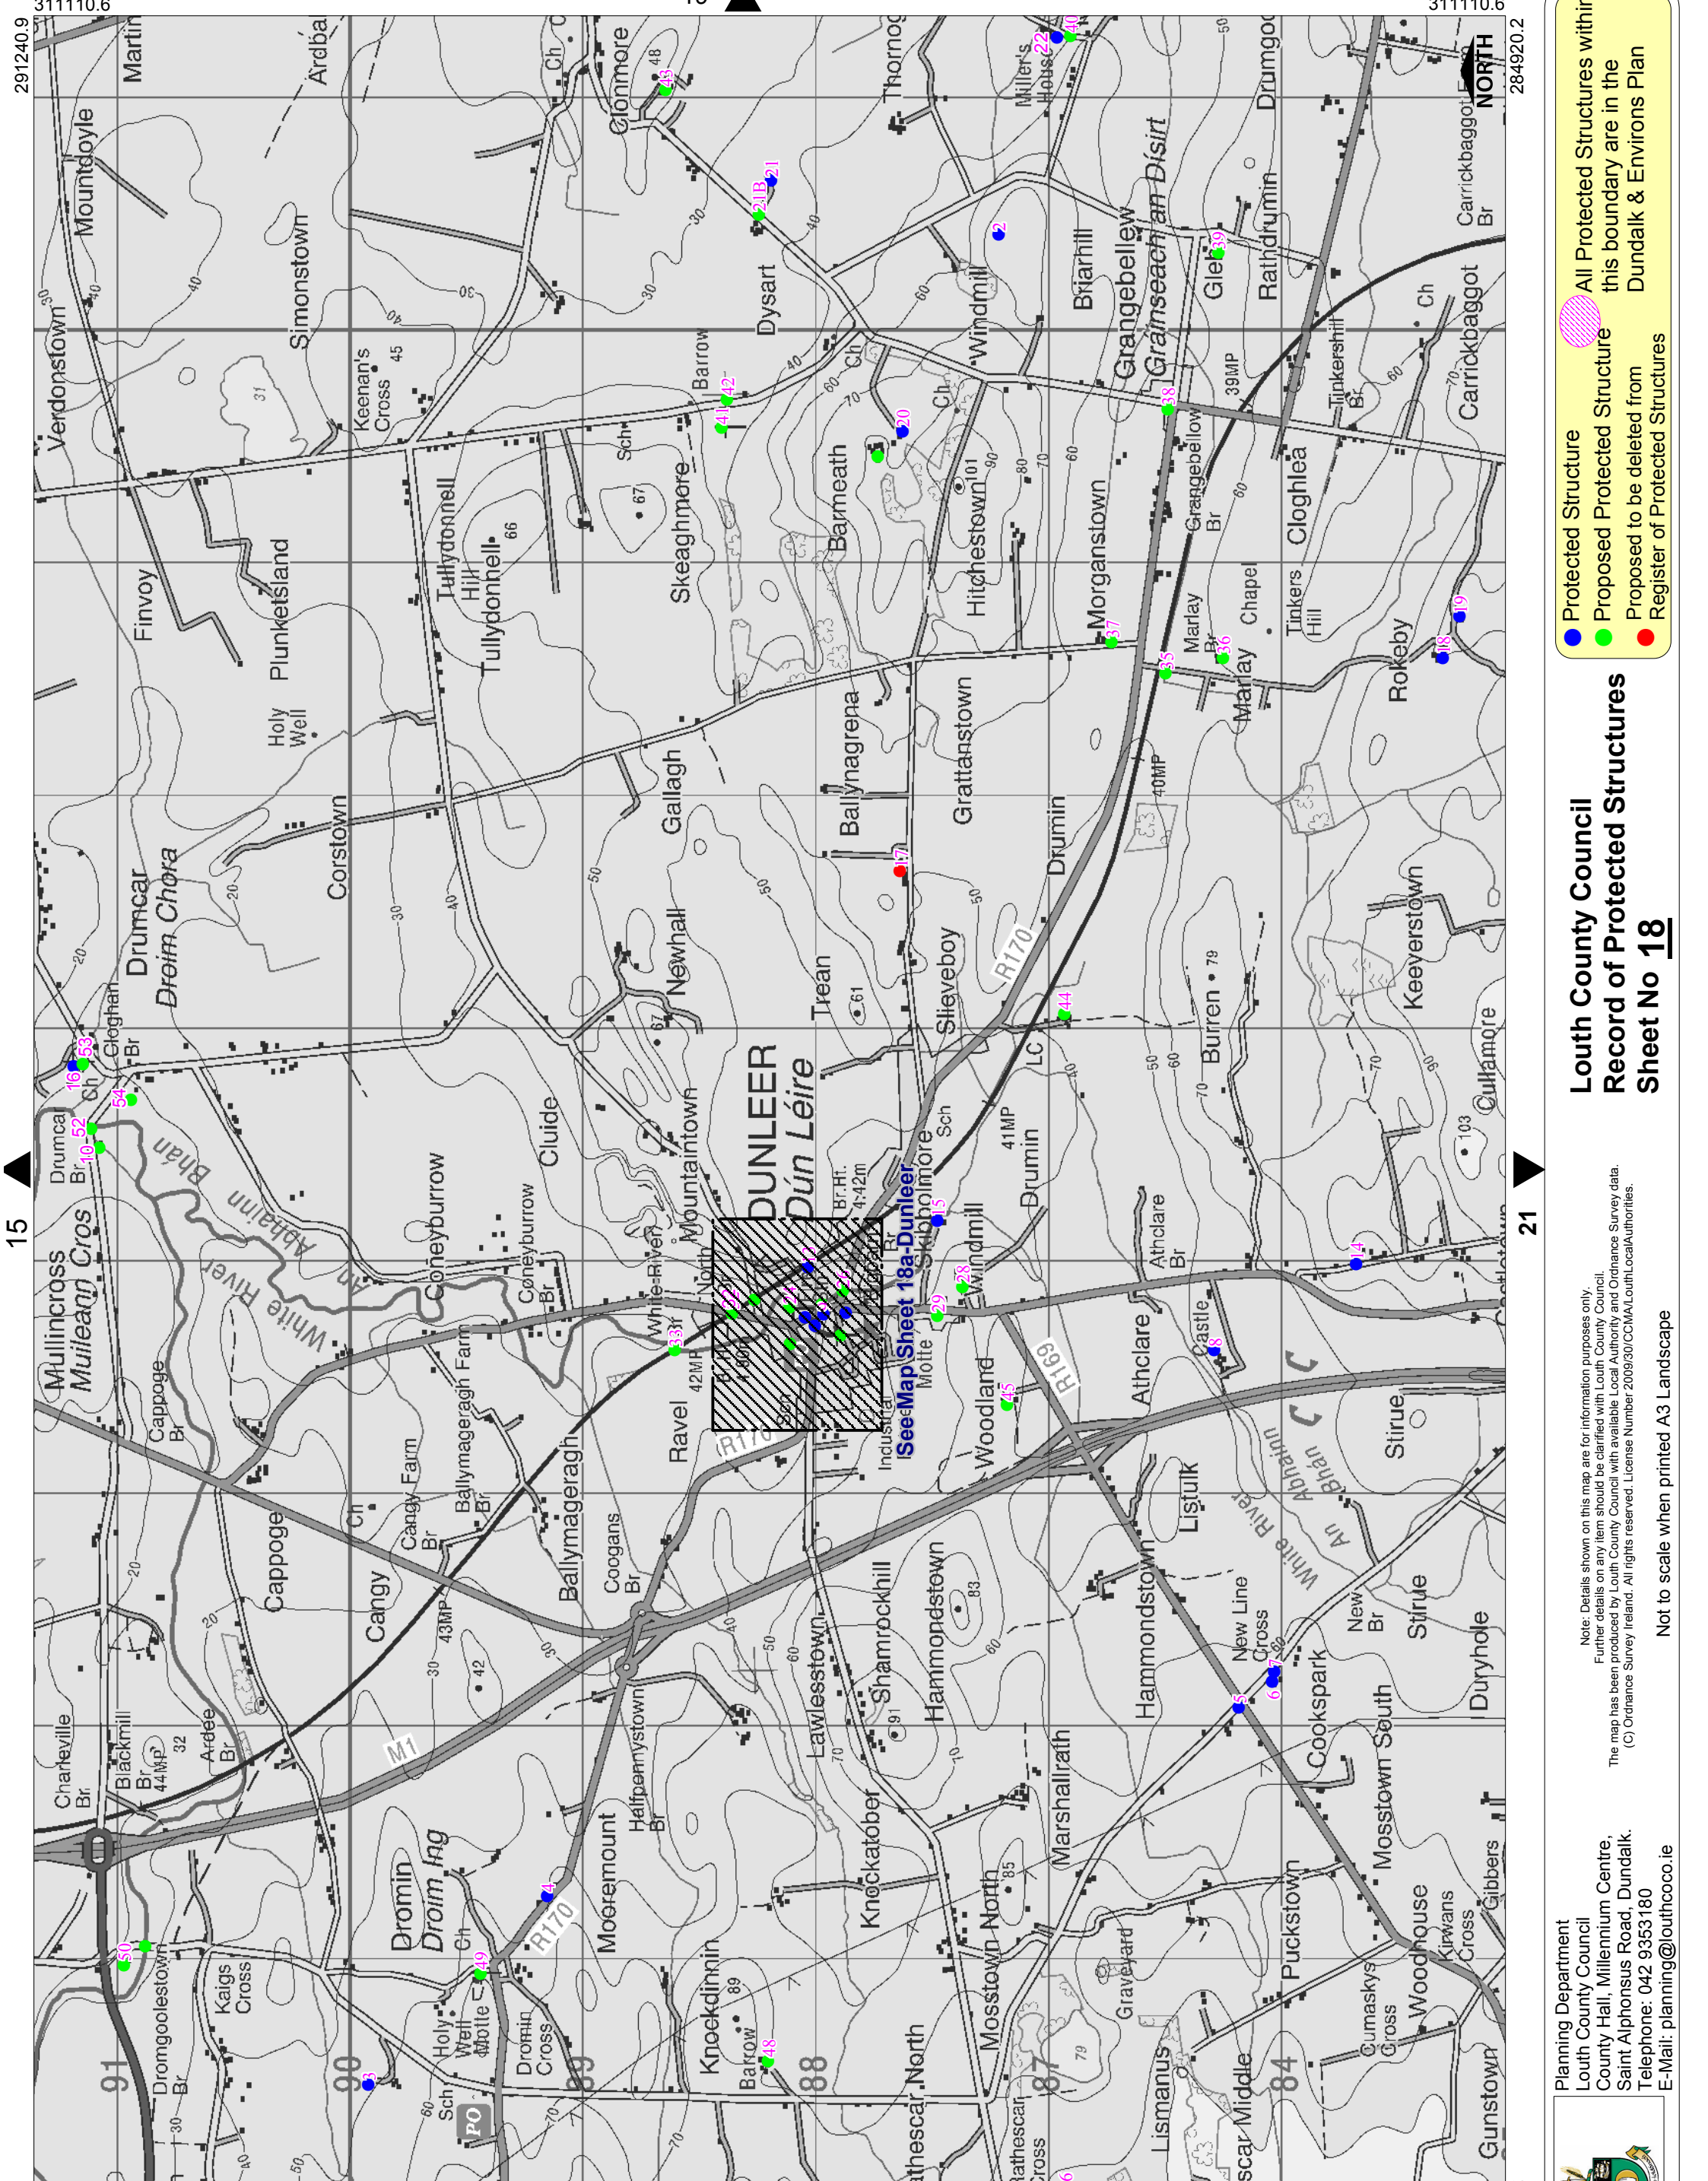


Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie

Note: Details shown on this map are for information purposes only.
Further details on any item should be clarified with Louth County Council.
The map has been produced by Louth County Council with available Local Authority and Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number 2009/30/CCMA/LouthLocalAuthorities.

Not to scale when printed A3 Landscape

Louth County Council Record of Protected Structures Sheet No 18

- Protected Structure
- Proposed Protected Structure
- Proposed to be deleted from Register of Protected Structures
- All Protected Structures within this boundary are in the Dundalk & Environs Plan

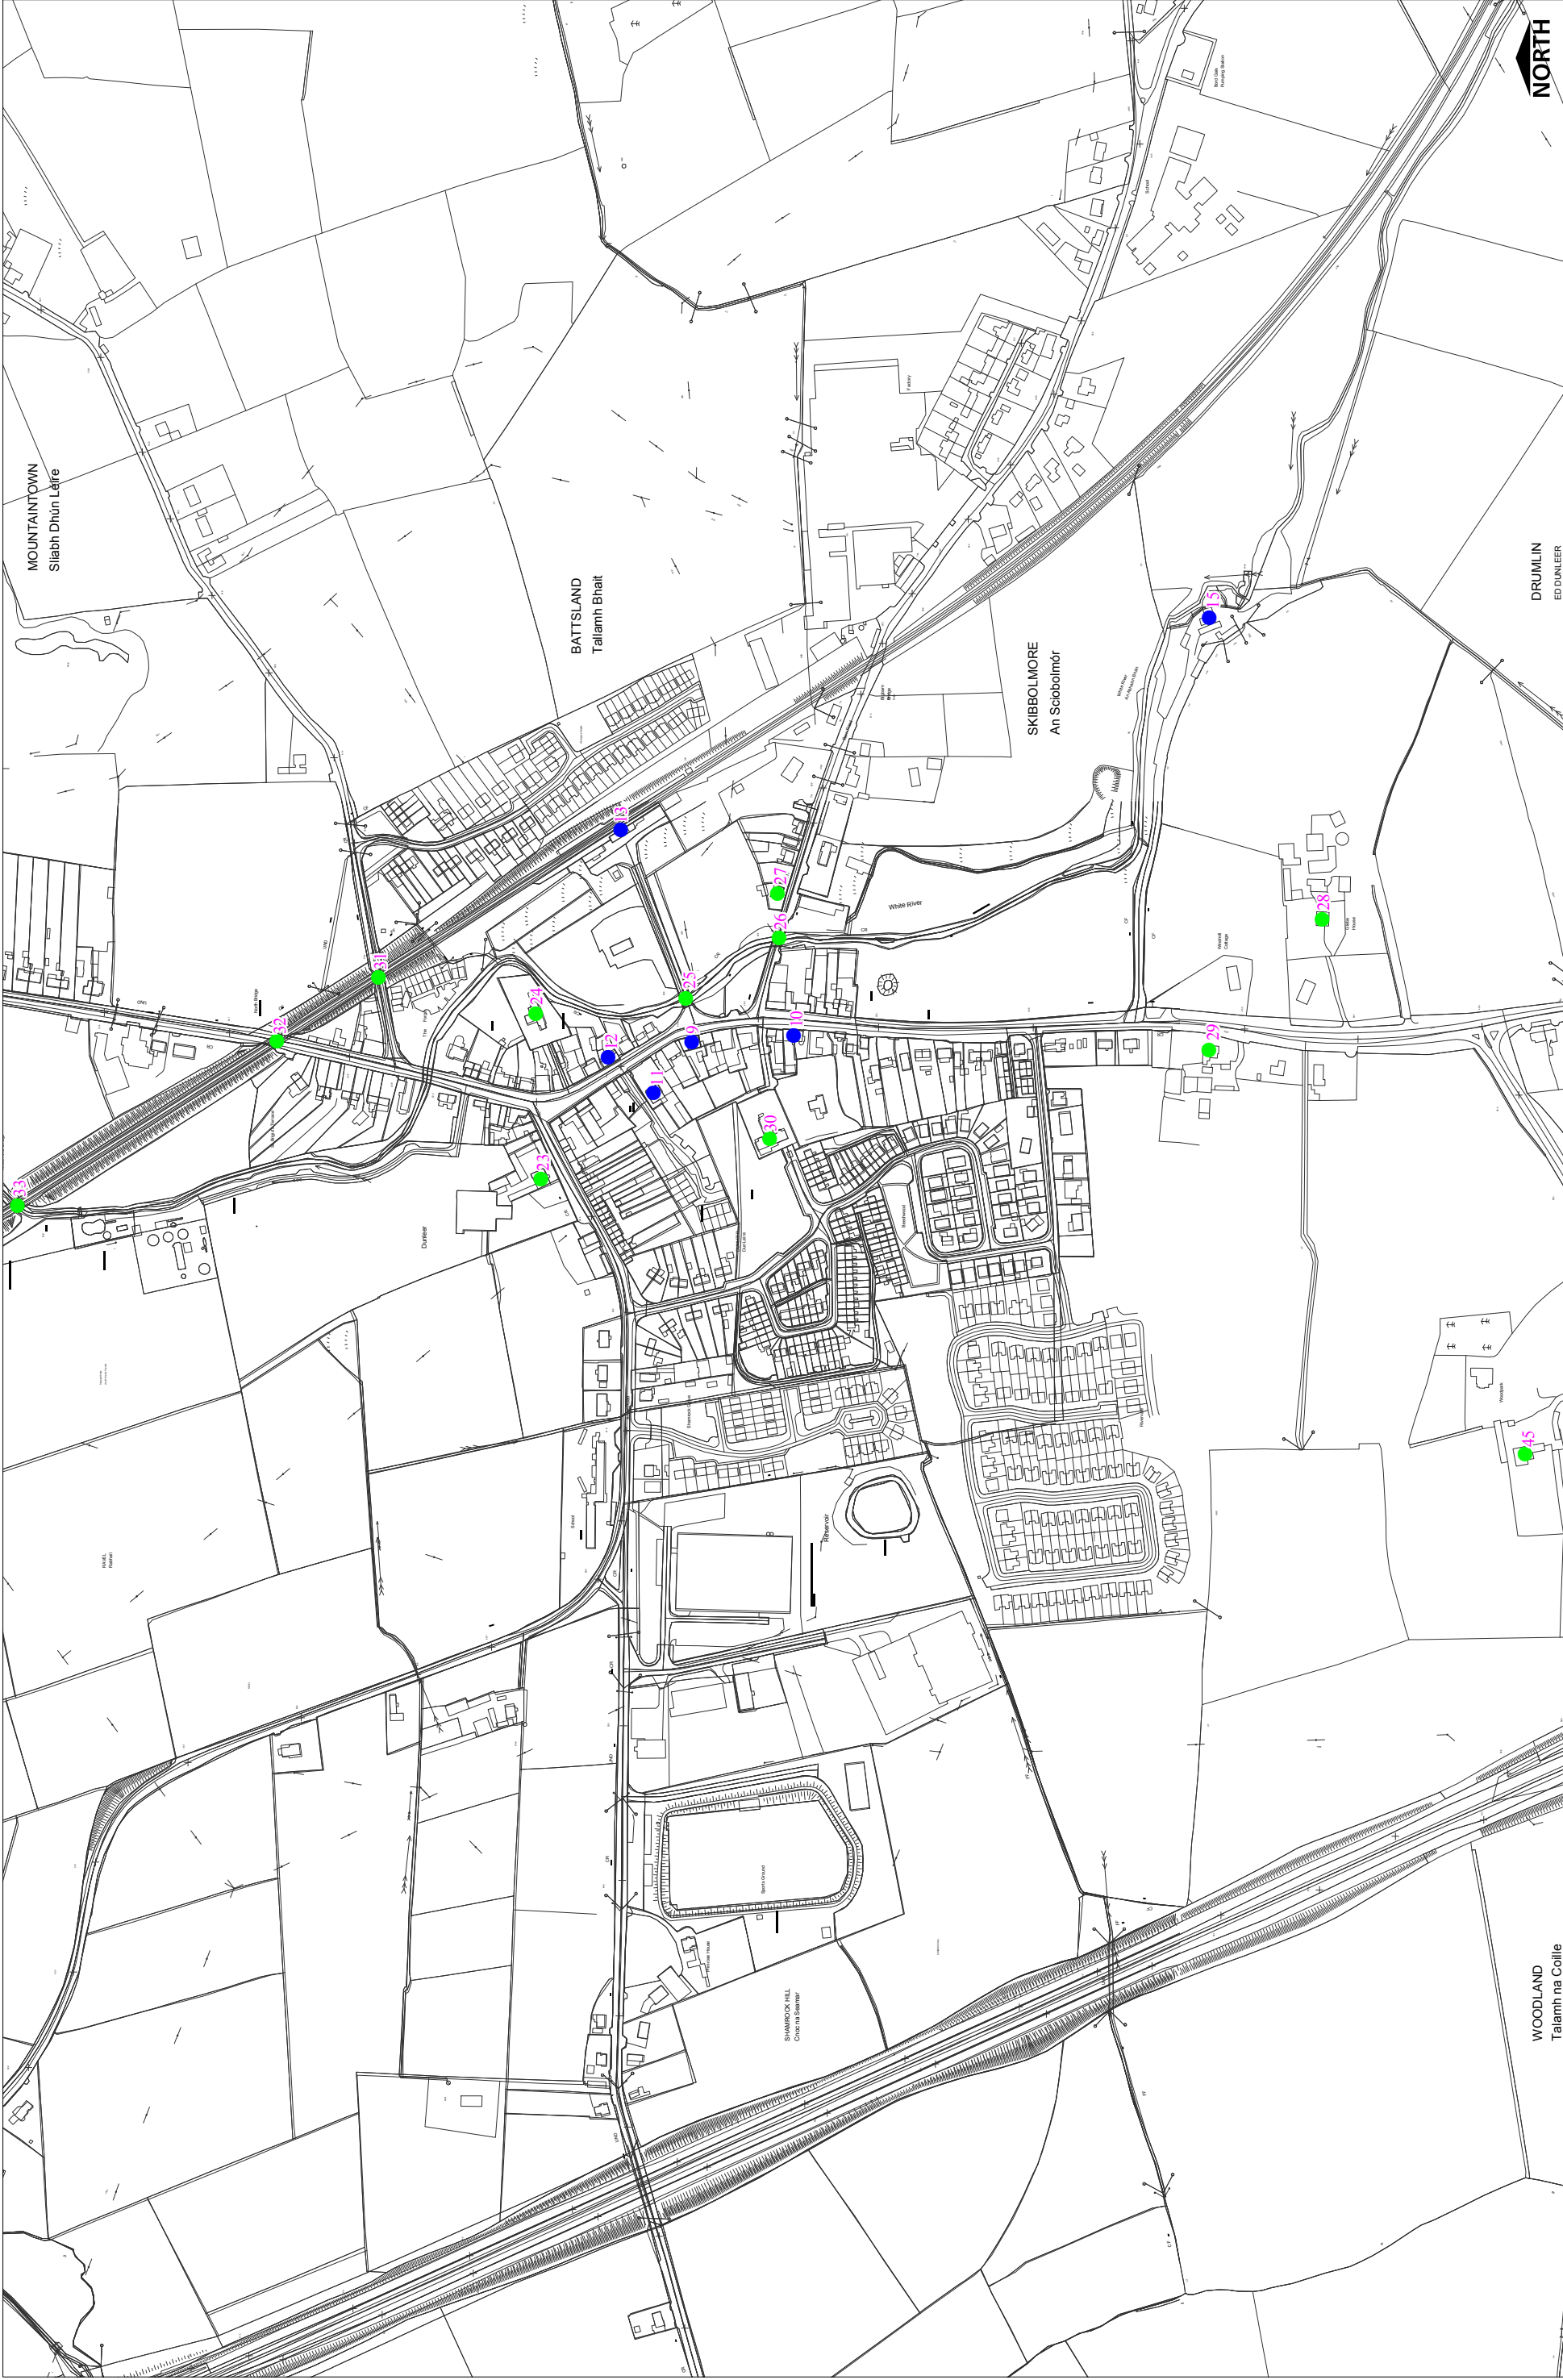

Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie

Note: Details shown on this map are for information purposes only.
Further details on any item should be clarified with Louth County Council.
The map has been produced by Louth County Council with available Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number 2009/00/CCLMA/LouthLocalAuthorities.

Louth County Council Record of Protected Structures Sheet No 18(a) Dunleer

- Protected Structure
- Proposed Protected Structure
- Proposed to be deleted from Register of Protected Structures



All Protected Structures within
this boundary are in the
Dundalk & Environs Plan

Not to scale when printed A3 Landscape

Draft Louth County Development Plan 2009 - 2015.
Record of Protected Structures.


Status	I D	Map Sheet	Address	Name	Description	Notes	NIAH Number
Existing Protected Structure	Lhs018-001	18	Rathescar Middle	Rathescar	Country House	From early 19thC, three-bay three-storey central block with single-bay two-storey lateral wings, Regency finish over an earlier house, with tower, conservatory, walled garden, stables and outbuildings	13901826
Existing Protected Structure	Lhs018-002	18	Windmill	Moneyveg Tower	Folly	Mid fortified freestanding gothic tower folly, dated 1837. four-storey with stone dressings, circular plan	13901815
Existing Protected Structure	Lhs018-003	18	Dromin	Dromin House	House	Country house,built c. 1800. five-bay, two-storey over basement, incl. walled gardens and stable Return to west, built c. 1870, further two-storey extension to west, porch to east elevation yards	13901833
Existing Protected Structure	Lhs018-004	18	Mooremount	Mooremount Thatch	Thatched Cottage	Five-bay single storey stone/clay walled whitewashed thatched cottage with projecting flat roofed porch and galvanised roofed attached outbuilding - OPW site 43	13901831
Existing Protected Structure	Lhs018-005	18	Hammondstown	Hammondstown Thatch	Thatched Cottage	four-bay single storey stone walled whitewashed thatched cottage with galvanised roofed. built c. 1760, currently unoccupied, attached outbuilding -OPW site 44	13901805
Existing Protected Structure	Lhs018-006	18	Hammondstown	Hammondstown Thatch	Thatched Cottage	Detached three-bay single-storey thatched house, built c. 1750. Rectangular-plan, pitched corrugated-iron random rubble attached outbuilding to west. -OPW site 46	13901807
Existing Protected Structure	Lhs018-007	18	Hammondstown	Hammondstown Thatch	Thatched Cottage	five-bay single storey stone/clay walled whitewashed thatched cottage built c. 1750 with attached tiled roofed outbuilding and abutting farm shed.	13901806
Existing Protected Structure	Lhs018-008	18	Athclare	Athclare Castle	Towerhouse	Detached multiple-bay three-storey tower house, built c. 1550, extended c. 1650. Rectangular-plan, tower to east.hall block containing early 17thC chimneypiece, an attached dwelling is under construction.	13901808
Existing Protected Structure	Lhs018-009	18	Dunleer	House Opposite Railway Station	House	c.1870 four-bay two-storey red brick house with yellow brick quoins, & string courses.	13830014
Existing Protected Structure	Lhs018-010	18	Dublin Road□□Dunleer	St. Bridget's Hall	Hall	Attached gable-fronted church hall, dated 1902. Rectangular-plan, corner buttresses to gable, engaged flat-roofed extension to south. red brick with ornamental red tiles	13830012
Existing Protected Structure	Lhs018-011	18	Main Street□□Dunleer	Bramble Lodge	House	c.1840, three-bay two-storey with breakfront, former parochial house, shallow hipped roof, arches on ground floor.	13830015
Existing Protected Structure	Lhs018-012	18	Main Street□□Dunleer	Five-bay House	House	Five-bay, two-storey house, hipped roof with lead roll ridges, two brick chimneys, wide bracketed eaves, Carriage arch, doorcase with decorative fanlight.built c. 1910, formerly also in use as shop. Rectangular-plan with integral carriage arch.	13830003
Existing Protected Structure	Lhs018-013	18	Battsland	Dunleer Railway Station	Railway Station	Station buildings, single storey, red brick with yellow brick trim, goods shed. built 1881, no longer in use	13830005
Existing Protected Structure	Lhs018-014	18	Stonehouse	Stonehouse Thatch	Thatched Cottage	Three-bay single storey thatched cottage with stone chimney stack and attached galvanised roofed outbuildings - OPW site 47	
Existing Protected Structure	Lhs018-015	18	Drumin	White River Watermill	Corn Mill	five-bay two-storey rubble stone mill building with hipped slated roof, drying shed, weirs and sluices	13830009
Existing Protected Structure	Lhs018-016	18	Drumcar	McIntock Mausoleum	Tomb	Freestanding octagonal tooled limestone mausoleum, dated 1868. octagonal, of cut stone with crockets and coats of arms,	13901838

Draft Louth County Development Plan 2009 - 2015.
Record of Protected Structures.

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Proposed To Be Deleted	Lhs018-017	18	Ballynagrena	Ballynagrena Cottage	Cottage	Two-storey t-shaped house with steep pitched gables and projecting eaves, tall red brick chimneys	
Existing Protected Structure	Lhs018-018	18	Rokeby	Rokeby Hall Coach House	House	Stableyard, built c. 1790. by Thomas Cooley and Francis Johnson. Consisting of three interlinked courtyards, walled garden attached to south-west; principal courtyard to east.	13901803
Existing Protected Structure	Lhs018-019	18	Rokeby	Rokeby Hall	House	Detached seven-bay two-storey over basement stone country house, built c. 1785. by Thomas Cooley and Francis Johnson.	13901802
Existing Protected Structure	Lhs018-020	18	Barneath	Barneath Castle & Gate Lodge	Towerhouse	Detached multiple-bay three-storey crenellated county house, built c. 1770, on site of medieval castle. Remodelled, enlarged and crenellated 1839, four-storey crenellated round towers to north and west.	13901817
Proposed Protected Structure	LHS018-020B	18	Barneath	Barneath Castle Farmyard Complex	Farmyard Complex	Rendered stableyard, built c. 1800. Square-plan, single-storey with attic outbuildings ranged to south, north and west; walled garden forming east range.	13901818
Existing Protected Structure	Lhs018-021	18	Clonmore	Clonmore Glebe & Gate Lodge	House	Four-bay two-storey house with 2 bay breakfront with round headed doorcase by Francis Johnson c. 1782, incl gates, piers and gatelodge.	13901822
Proposed Protected Structure	LHS018-021B	18	Clonmore	Clonmore Glebe Gate Lodge	Gate Lodge	Detached three-bay two-storey gate lodge, built c. 1820, no longer in use. Rectangular-plan.	13901821
Existing Protected Structure	Lhs018-022	18	Milltown	Milltown Thatched House	Thatched Cottage	From mid 1700's, five-bay, two-storey, stone/earth walled, thatched farmhouse - OPW site 48	13901842
Proposed Protected Structure	LHS018-023	18	Ravel		House	Detached five-bay two-storey house, built c. 1780. Rectangular-plan with breakfront to centre north elevation, return and lean-to addition to north, single-storey gable-fronted porch to south	13830001
Proposed Protected Structure	LHS018-024	18	Dunleer	Dunleer Church Of Ireland Church	Church	Freestanding Church of Ireland church, built 1830, comprising four-bay nave with thirteenth century three-stage crennellated tower to west and later nineteenth century chancel to east.	13830002
Proposed Protected Structure	LHS018-025	18	Dunleer	Bridge	Road Bridge	Single-span road-over-river bridge, built c. 1840.	13830004
Proposed Protected Structure	LHS018-026	18	Battisland	Bridge	Road Bridge	Single-span road-over-bridge, built c. 1850.	13830007
Proposed Protected Structure	LHS018-027	18	Battisland		House	Detached three-bay two-storey house, built c. 1890.	13830008
Proposed Protected Structure	LHS018-028	18	Glebe House, Windmill	Glebe House	Rectory	Detached three-bay two-storey over basement former glebe house, built c. 1820, now in use as house.	13830010
Proposed Protected Structure	LHS018-029	18	Dunleer	Four-bay Two-storey house	House	Detached four-bay two-storey house, built c. 1890.	13830011
Proposed Protected Structure	LHS018-030	18	St.Brigid's Roman Catholic Church, Dunleer	St.Brigid's Roman Catholic Church	Chapel	Freestanding T-plan church, built c. 1830, square-plan three-stage tower and broach spire added to east, 1859, renovated 1884.	13830013

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Proposed Protected Structure	LHS018-031	18	Dunleer		Railway Bridge	Single-span stone railway-over-road bridge, built c. 1880.	13830016
Proposed Protected Structure	LHS018-032	18	Dunleer	North Bridge	Railway Bridge	Single-span railway-over-road limestone bridge, built c. 1880. Concrete block parapet walls c. 1970.	13830017
Proposed Protected Structure	LHS018-033	18	Ravel	White River Bridge	Railway Bridge	Single-span rail-over-river bridge, built c. 1880. Cylindrical iron columns, riveted iron panels supporting deck, cylindrical iron railings, depressed plinths. Spanning White River at outskirts of Dunleer town.	13830018
Proposed Protected Structure	LHS018-035	18	Rokeby Hall Gate Lodge, Marlay	Rokeby Hall Gate Lodge	Gate Lodge	Detached three-bay single-storey over basement former gate lodge, built c. 1820, now in private domestic use. Square-plan, cast-iron lean-to return to north.	13901809
Proposed Protected Structure	LHS018-036	18	Marlay House, Marlay	Marlay House	Farm House	Detached three-bay two-storey farm house, built c. 1800, extended to north c. 1850.	13901810
Proposed Protected Structure	LHS018-037	18	Morganstown House	Morganstown House	Farm House	Detached three-bay two-storey house, built c. 1830. L-plan, returning three-bays to west, two-storey return at angle of "L" to north, lean-to and flat-roofed extensions added to north c. 1970.	13901811
Proposed Protected Structure	LHS018-038	18	Grangebellew	Three-bay Two-storey house	House	Detached three-bay two-storey house, built c. 1860. Pair of single-storey pitched returns to north, lean-to extension to return, gable-fronted porch to south elevation	13901812
Proposed Protected Structure	LHS018-039	18	Glebe		Rectory	Detached three-bay two-storey over basement former glebe house, built c. 1800, now in use as private house. Return and lean-to extension to west.	13901813
Proposed Protected Structure	LHS018-040	18	Milltown		Water Mill	Detached single- and double-height and two-storey former corn mill complex, built c. 1800, now in use as store. Rectangular main building, lower pitched roofed extension to east, single-storey mud-walled building to north, freestanding two-storey pitched	13901814
Proposed Protected Structure	LHS018-041	18	Dysart Roman Catholic Church, Barmeath	Dysart Roman Catholic Church	Church	Freestanding Roman Catholic church, built 1766. T-plan, sacristy to west	13901819
Proposed Protected Structure	LHS018-042	18	Dysart National School, Dysart	Dysart National School	School	Detached seven-bay single-storey rendered national school, dated 1835, no longer in use. Rectangular-plan, single-bay projecting entrance porch to north, flat-roofed extension to south c. 1970	13901820
Proposed Protected Structure	LHS018-043	18	Clonmore Hill, Clonmore	Clonmore Hill	Farm House	Detached three-bay two-storey house, built c. 1820. Gable-fronted porch to south, single-storey wings to east and west	13901823
Proposed Protected Structure	LHS018-044	18	Burren House, Burren	Burren House	House	Detached three-bay two-storey house, built c. 1840. L-plan, three-bay two-storey south main block, gable-fronted block to north-west, canted bay to east, flat-roofed single-storey porch to north.	13901824
Proposed Protected Structure	LHS018-045	18	Woodpark, Woodland	Woodpark	House	Detached three-bay two-storey house, built c. 1880. Hipped roofed porch to south, conservatory to west, garage to north-east.	13901825
Proposed Protected Structure	LHS018-046	18	Rathescar,	Rathescar Stables	Stables	Rendered and stone stableyard, built c. 1820. Irregular plan, single- and two-storey outbuildings gathered around central yard, screen wall to east.	13901827

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Proposed Protected Structure	LHS018-047	18	Rathcoole House, Rathcoole	Rathcoole House	House	Detached three-bay two-storey over basement house, built c. 1820. Two-storey over basement lean-to return to west, single-storey over basement lean-to to north-west, three-bay two-storey addition to south-west	13901828
Proposed Protected Structure	LHS018-048	18	Knockdinnin Janeville,	Janeville	House	Detached three-bay two-storey house, built c. 1800. Two-storey lean-to return to north, hipped roofed porch c. 1970.	13901829
Proposed Protected Structure	LHS018-049	18	St.Joseph's Roman Catholic Church, Dromin	St.Joseph's Roman Catholic Church	Church	Freestanding double-height Roman Catholic church, built 1826. T-plan, two-bays to nave, single-bay to transepts; four stage pinnacled stone entrance tower, added 1843, terminating in broach spire, added 1877.	13901832
Proposed Protected Structure	LHS018-050	18	White Mills, Stabannan	White Mills	Mill Worker's Cottage	Attached three-bay single-storey miller's house, built c. 1820, now disused. Abutting mill to south.	13901834
Proposed Protected Structure	LHS018-051	18	Dromgoolestown Bridge, Richardstown	Dromgoolestown Bridge	Road Bridge	Single-arch bridge, built c. 1840, crossing the River Dee. □	13901835
Proposed Protected Structure	LHS018-052	18	Drumcar	Drumcar Bridge	Road Bridge	Humpback four-arched stone road-over-river bridge, built c. 1750, crossing the River Dee. Concrete to bases c.2000.	13901837
Proposed Protected Structure	LHS018-053	18	St. Fintan's Church of Ireland, Drumcar	St. Fintan's Church Of Ireland	Church	Freestanding Church of Ireland church, built 1845. Three-bay nave, single-bay chancel to east, gable-fronted entrance porch to south, gable-fronted vestry to north.	13901839
Proposed Protected Structure	LHS018-054	18	Old Rectory, Drumcar	Old Rectory	Rectory	Detached three-bay two-storey over basement former rectory, built c. 1800, now in use a private house. Decorative cast-iron veranda to north elevation.	13901840
Proposed Protected Structure	LHS018-055	18	Drumacar Corn Mill, Drumcar	Drumacar Corn Mill	Corn Mill	Detached multiple-bay two-storey corn mill, built c. 1800, no longer in use. L-plan, single-story stone addition to north, cast-iron and timber wheel to south. Remains of pitched slate roof, clay ridge tiles. Random rubble stone walling.	13901841

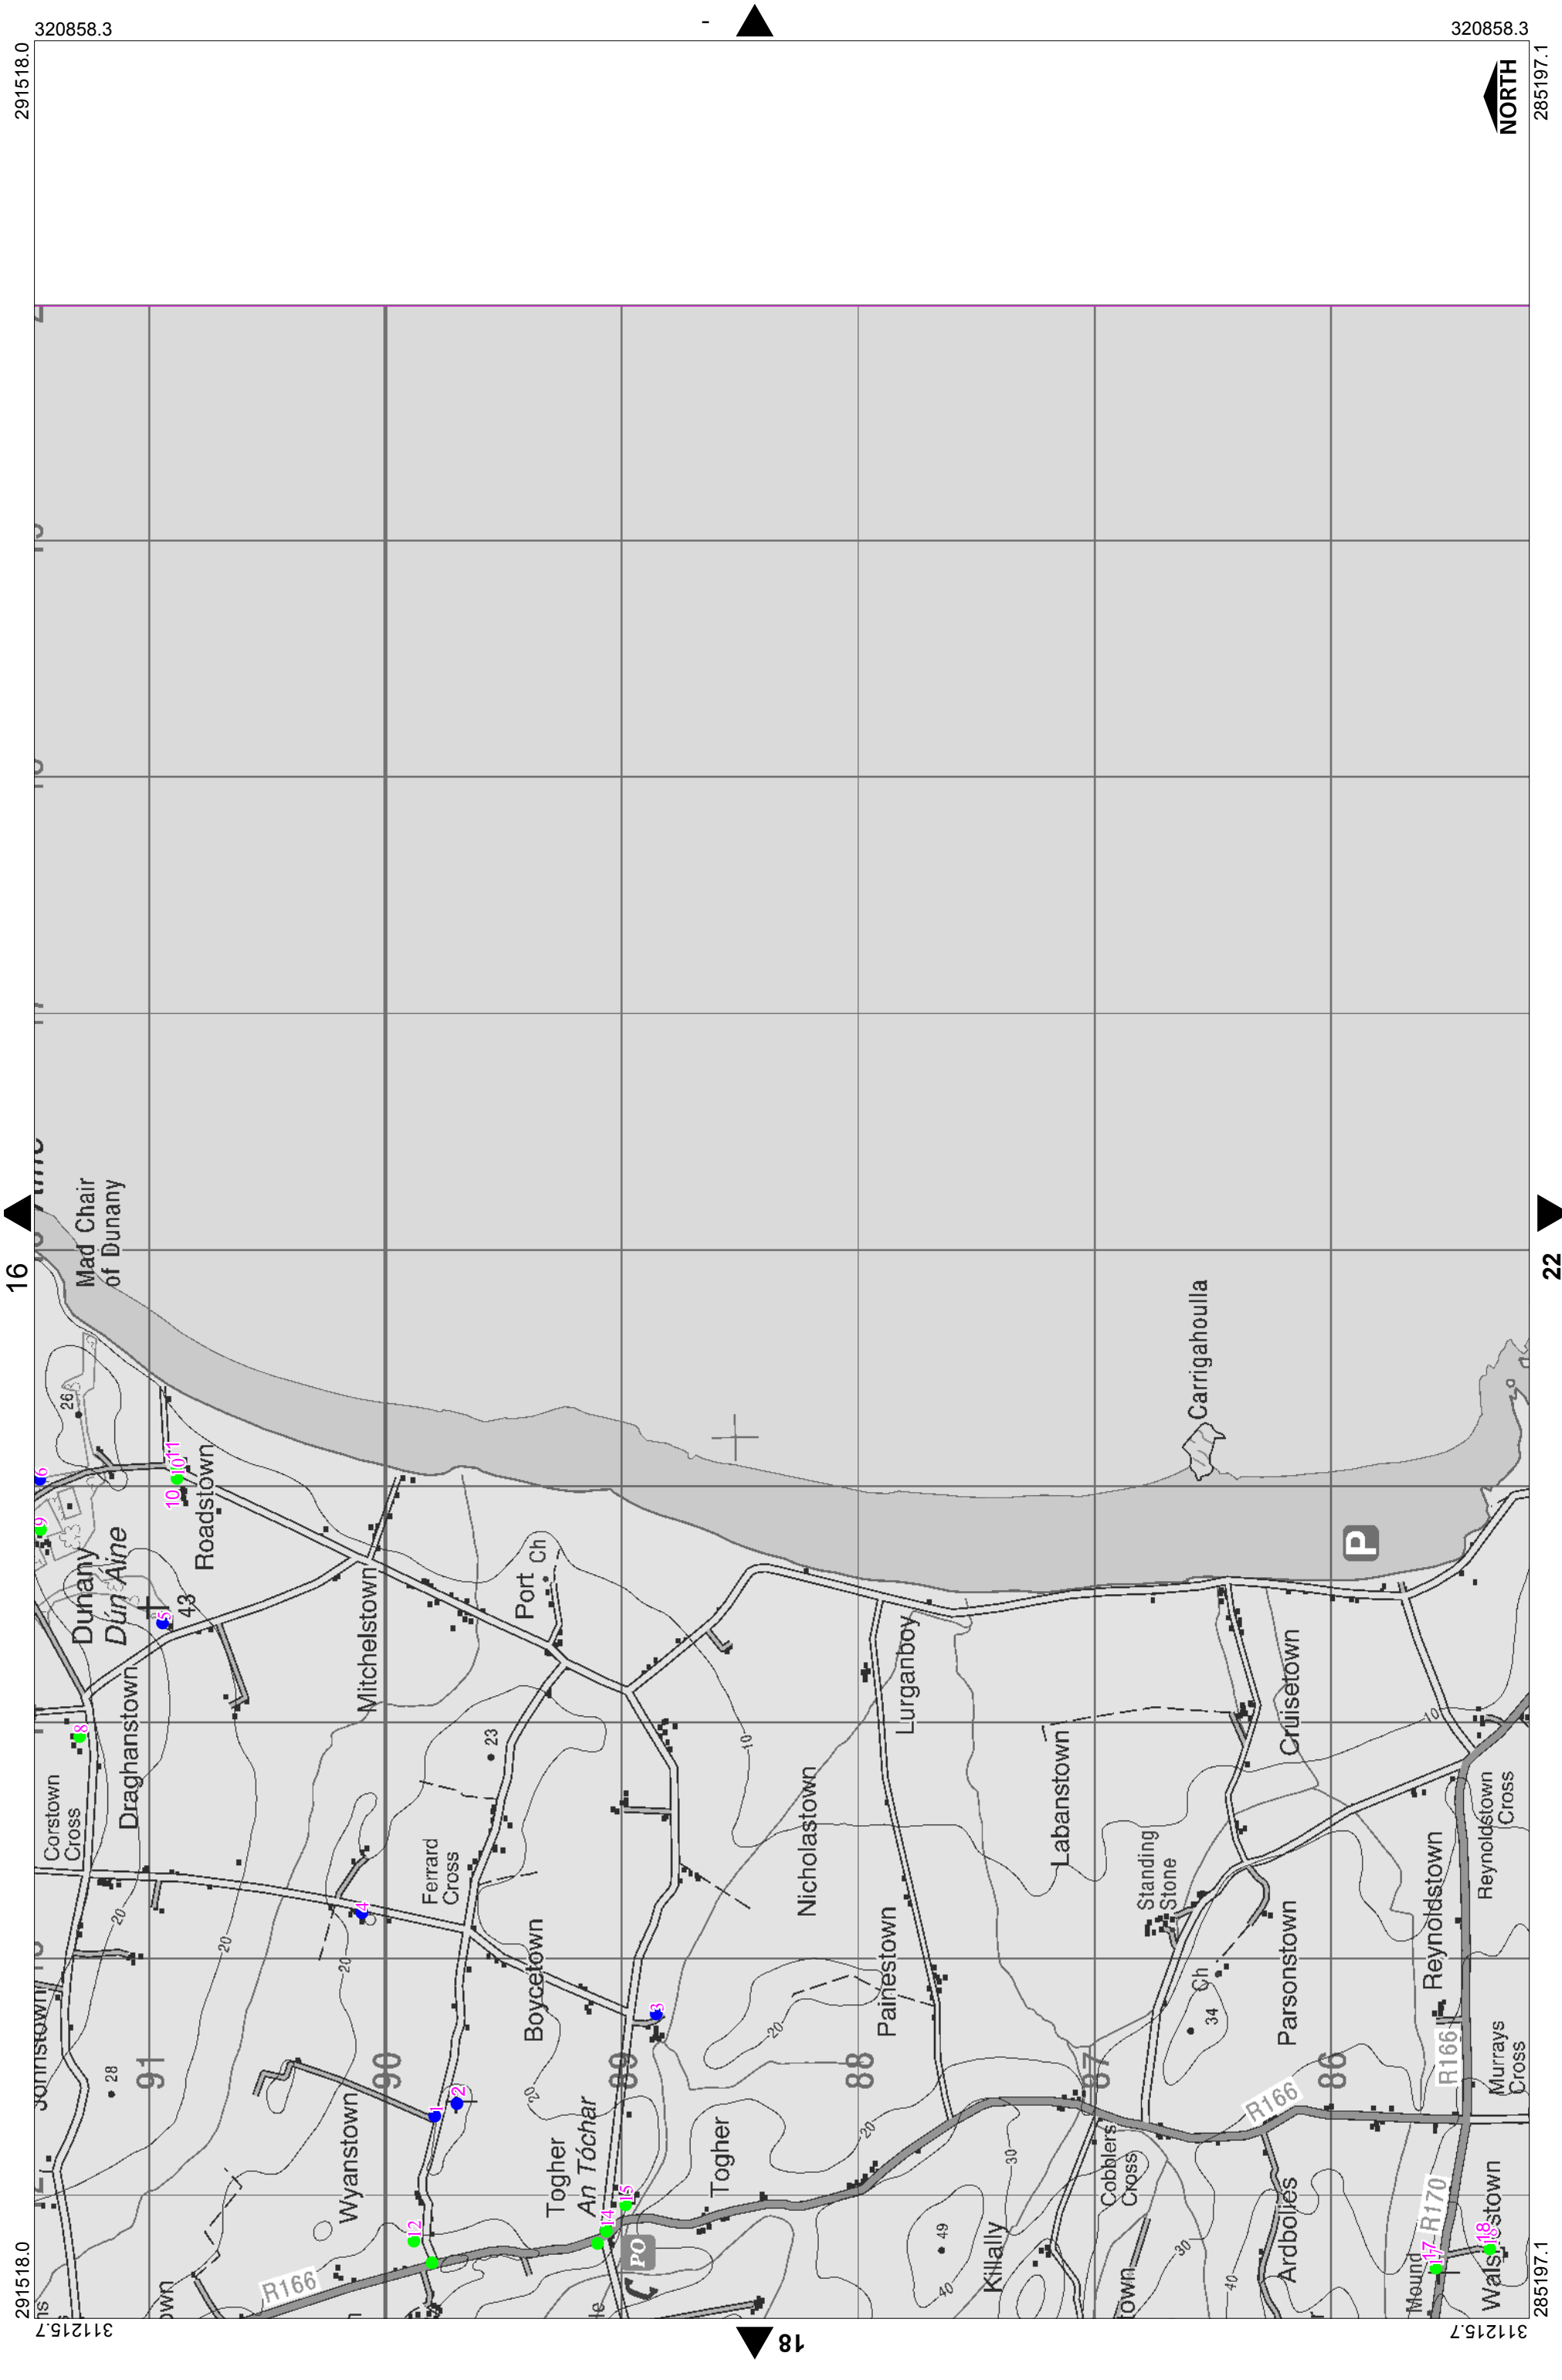

Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie

Note: Details shown on this map are for information purposes only.
Further details on any item should be clarified with Louth County Council.
The map has been produced by Louth County Council with available Local Authority and Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number 2009/30/CCMA/LouthLocalAuthorities.

Not to scale when printed A3 Landscape


Louth County Council Record of Protected Structures Sheet No 19

- Protected Structure
- Proposed Protected Structure
- Proposed to be deleted from Register of Protected Structures
- All Protected Structures within this boundary are in the Dundalk & Environs Plan

Draft Louth County Development Plan 2009 - 2015.
Record of Protected Structures.

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Existing Protected Structure	Lhs019-001	19	Wyanstown	Sally Cottage	Cottage	c. 1825. cottage ornee with applied shells, single bay two-storey central block with single storey wings with half hipped roofs.	13901907
Existing Protected Structure	Lhs019-002	19	Wyanstown	St Columille, Catholic Church	Church	Detached stone Gothic Revival Roman Catholic church, built 1866. Basilica plan, seven-bay two-storey nave elevation with single-storey lean-to aisles to east and west.	13901908
Existing Protected Structure	Lhs019-003	19	Boycetown	Seaview House	House	Three-bay two-storey over basement Georgian House, c. 1810 (Boycetown) replacement windows.	13901911
Existing Protected Structure	Lhs019-004	19	Port	Port Thatch	Thatched Cottage	Four-bay single-storey stone walled whitewashed thatched cottage, with attic, built c. 1830.- OPW thatch site 50	13901906
Existing Protected Structure	Lhs019-005	19	Dunany	St John The Baptist's Church	Church	Freestanding Church of Ireland church, built c. 1815, in Board of First Fruits style, remodelled c. 1840 in Tudor Gothic style.	13901905
Existing Protected Structure	Lhs019-006	19	Dunany	Dunany House - Pigeon House	Pigeon House	Dated 1751red brick octagonal plan with two levels, roofless.	
Proposed Protected Structure	LHS019-008	19	Dunany Cottage	Dunany Cottage	House	Detached three-bay single-storey with attic house, built c. 1880. Cant ed single-storey hipped roof porch to front (east) elevation, central pitched roofed return to west, single-pitch extension to south-west.	13901901
Proposed Protected Structure	LHS019-009	19	Dunany House	Dunany House	House	Detached multiple-bay two-storey house, built c. 1720, altered and extended c. 1770, enlarged and castellated c. 1820. H-plan, north and south wings each with crenellated parapets to east (front) elevation (both three-bays wide with slightly recessed cent	13901902
Proposed Protected Structure	LHS019-010	19	Seagrave House, Dunany	Seagrave House	House	Detached four-bay two-storey house, built c. 1850. Asymmetric timber gabled porch to south c. 1960, two-storey lean-to extension to north-east.	13901903
Proposed Protected Structure	LHS019-011	19	Dunany	Three-bay Two-storey house	House	Detached three-bay two-storey house, built c. 1840. Single-storey return enlarged to two-storey, section of single-storey return remains to east	13901904
Proposed Protected Structure	LHS019-012	19	Former Parochial House, Wyanstown	Former Parochial House	Passage Grave	Detached three-bay two-storey former parochial house, built c. 1890, now in use as private house. Two-storey return and single-storey outbuilding to north (rear), two-storey projecting bay to east.	13901909
Proposed Protected Structure	LHS019-013	19	Wyanstown	Four-bay Two-storey house	House	Detached four-bay two-storey house, built c. 1900. Gable-fronted projecting porch to south (front) elevation. Fronts onto T Junction.	13901910
Proposed Protected Structure	LHS019-014	19	Darby's, Togher	Darby's	House	Detached five-bay two-storey house, built c. 1800, now also in use as public house. Located on a busy crossroads.	13901912
Proposed Protected Structure	LHS019-015	19	Togher House□□	Togher House	House	Detached house, built c. 1700. Triple gabled rear elevation. Pitched slate roofs with rebuilt red brick chimneystacks. Rendered walls. Some timber and replacement uPVC windows. Additions and outbuildings to rear.	13901913

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Proposed Protected Structure	LHS019-016	19	Louth	Four-bay Two-storey house	House	Detached four-bay two-storey house, built c. 1820.	13901914
Proposed Protected Structure	LHS019-017	19	Walshestown	St. Peter's Roman Catholic Church	Church	Freestanding Roman Catholic church, built 1837. Four-bay nave, entrance porch to west, three-stage crenellated square tower to east with engaged octagonal crenellated turret to north-east, sacristy to north-east.	13901915
Proposed Protected Structure	LHS019-018	19	Walshestown House	Walshestown House	Country House	Detached four-bay two-storey over basement house, built 1799. Originally three-bay, single-bay extension to south, single-storey basement extension to centre east surmounted by first floor gabled conservatory built 2005.	13901916

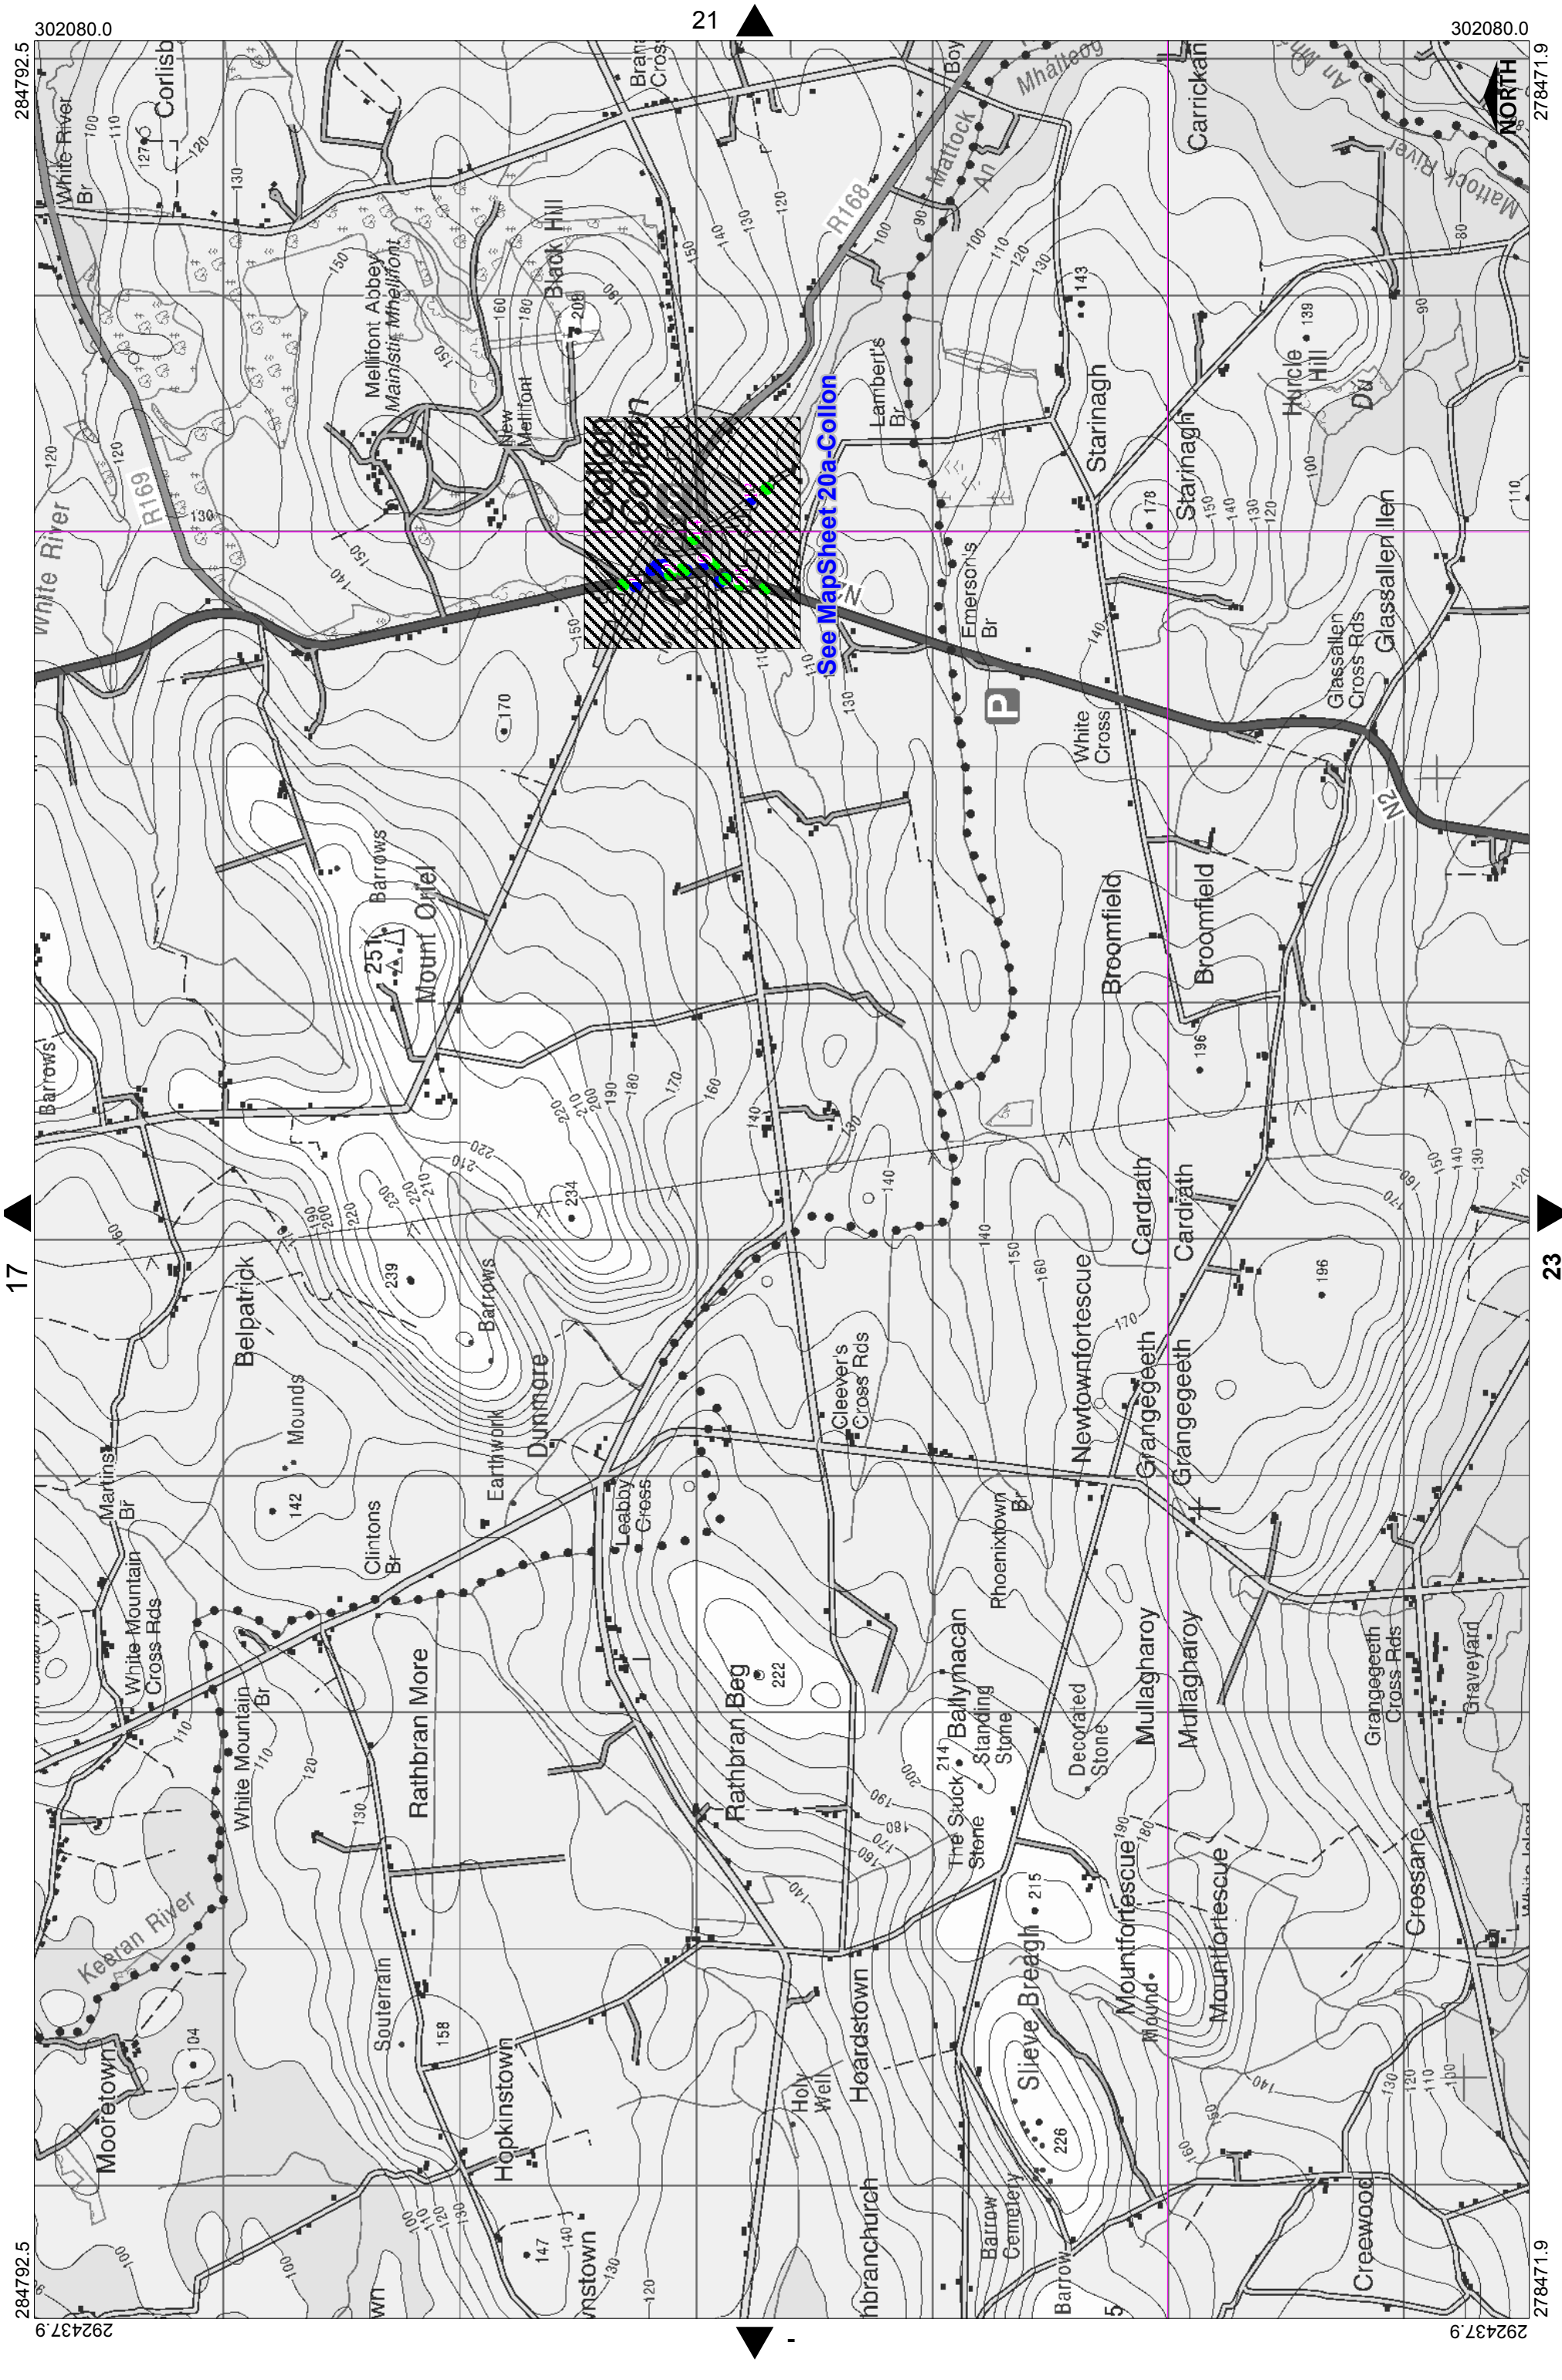



Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie


Louth County Council
Record of Protected Structures
Sheet No 20

Note: Details shown on this map are for information purposes only.
Further details on any item should be clarified with Louth County Council.
The map has been produced by Louth County Council with available Local Authority and Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number 2009/30/CCMA/LouthLocalAuthorities.

Not to scale when printed A3 Landscape

Protected Structure
Proposed Protected Structure
Proposed to be deleted from
Register of Protected Structures

All Protected Structures within
this boundary are in the
Dundalk & Environs Plan

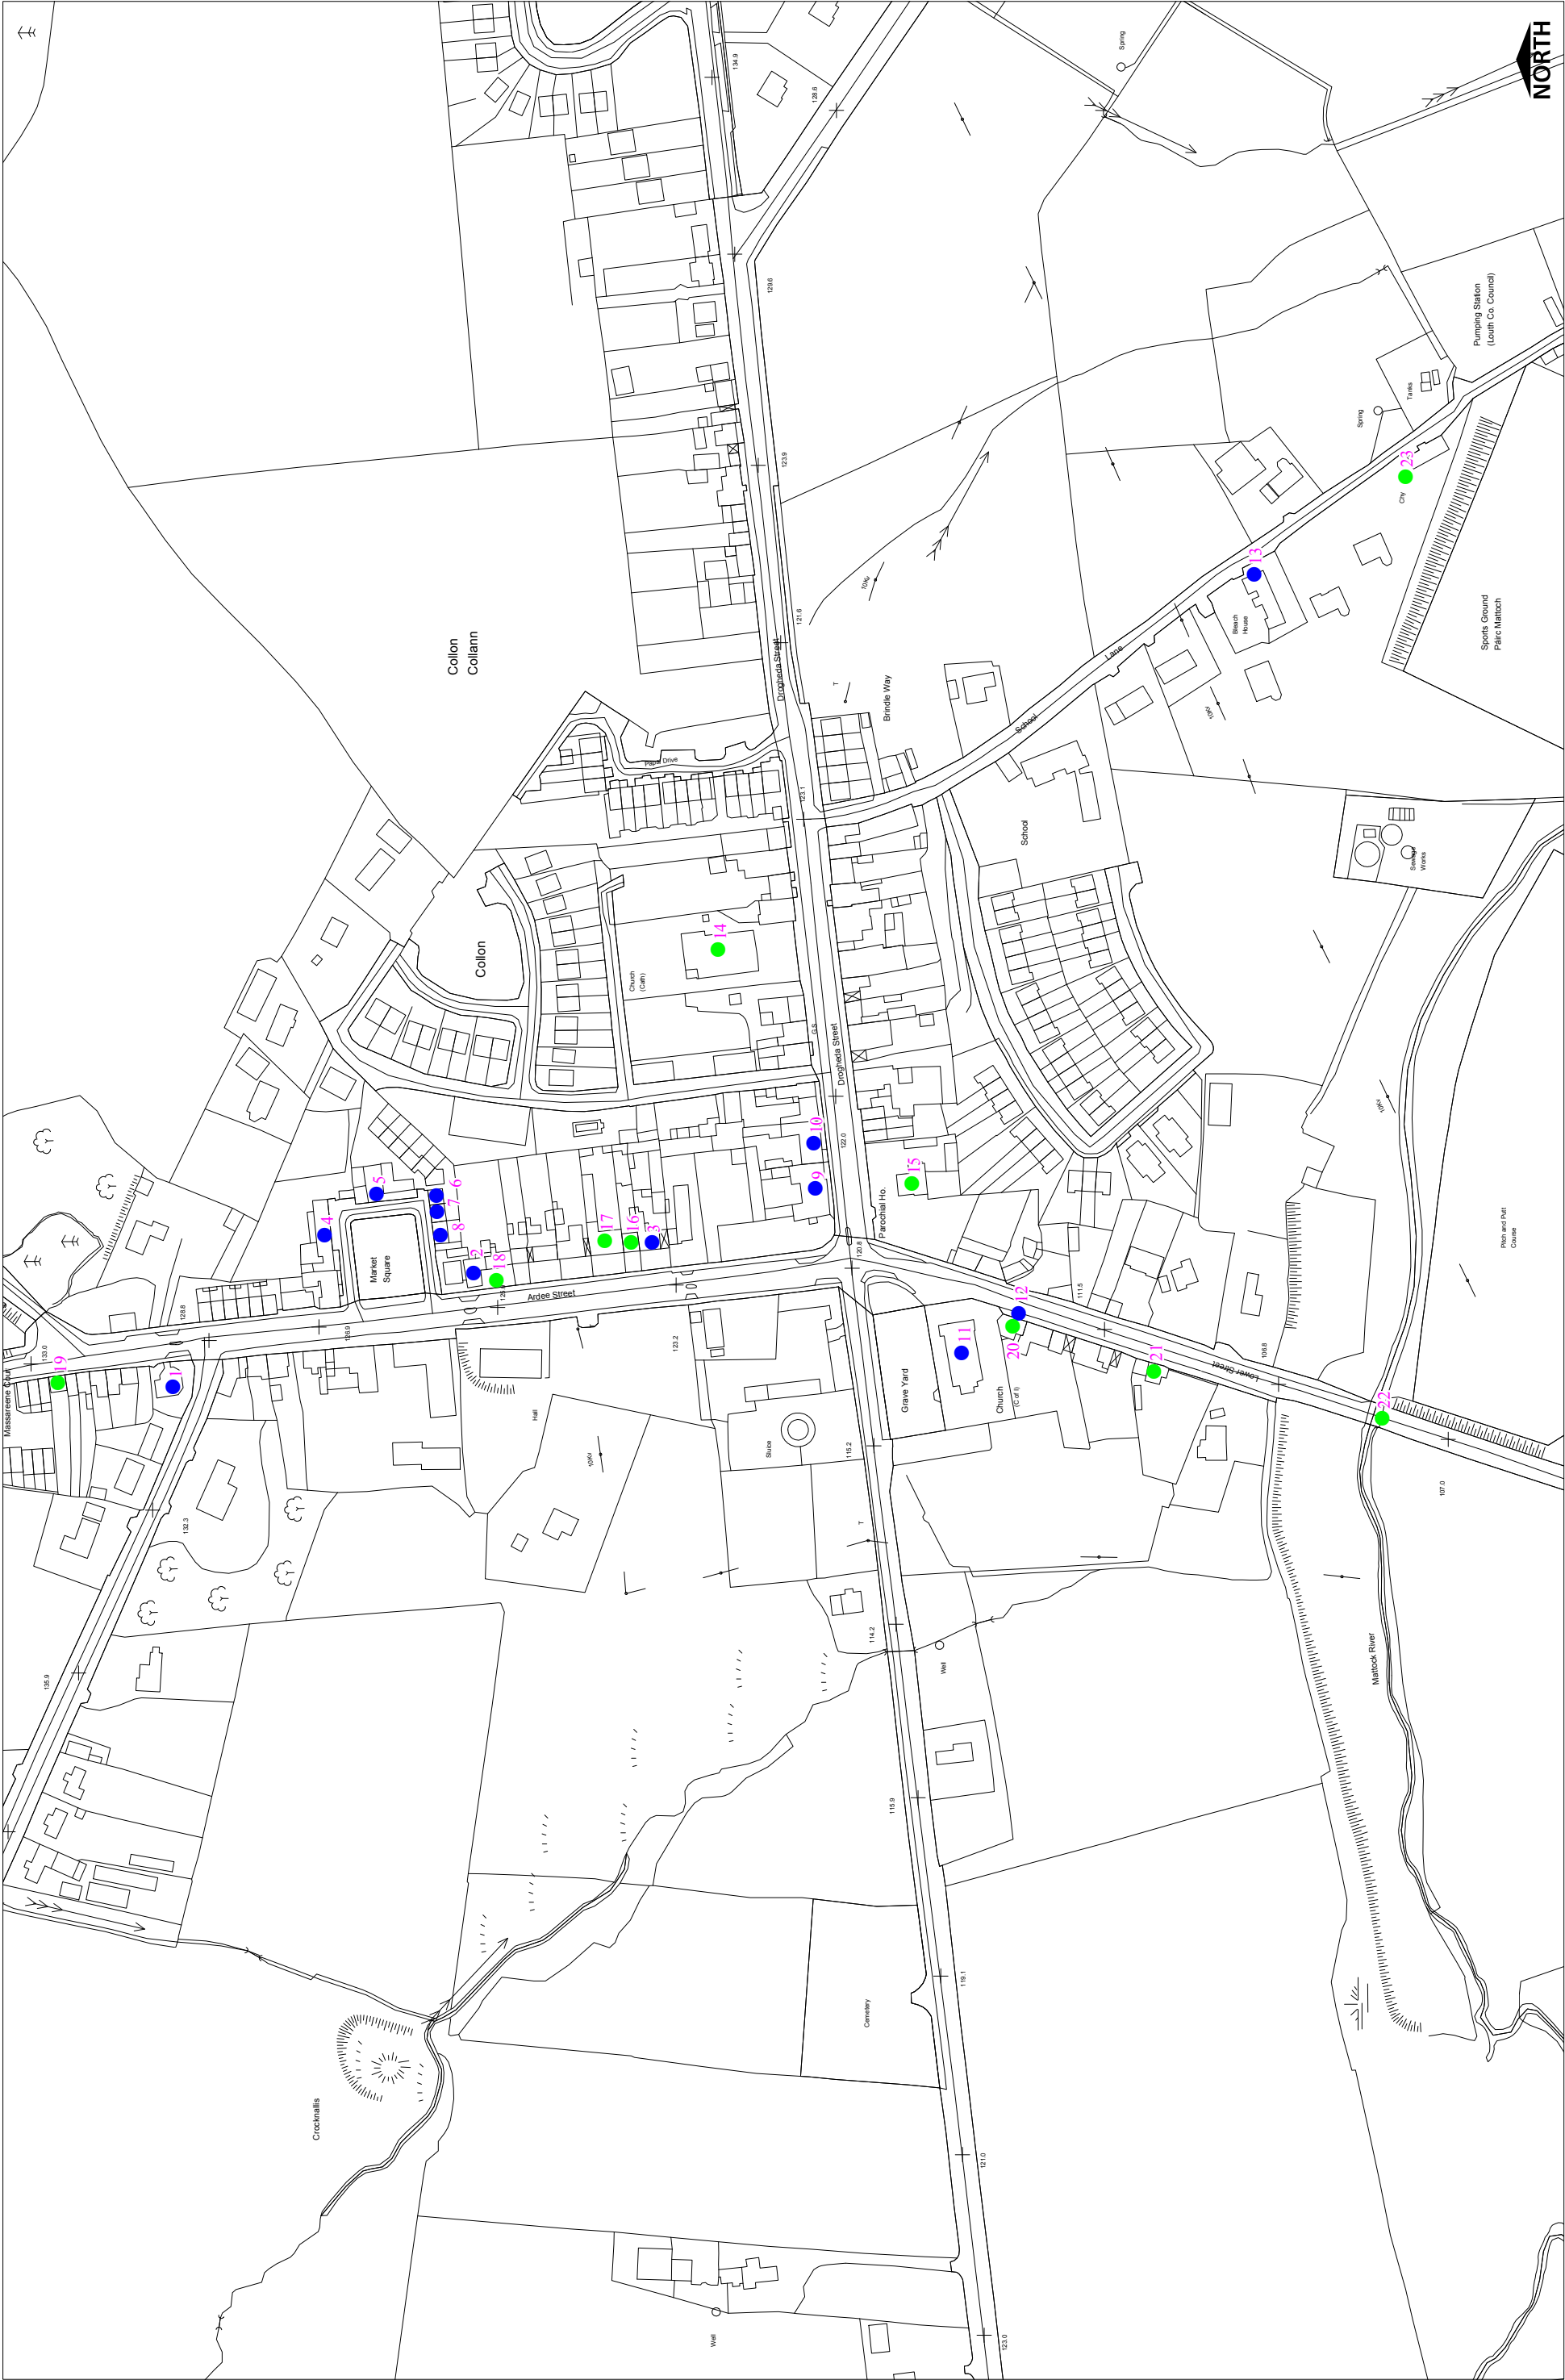

Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie

Note: Details shown on this map are for information purposes only.
Further details on any item should be clarified with Louth County Council.
The map has been produced by Louth County Council with available Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number 2009/00/CCLMA/LouthLocalAuthorities.

Not to scale when printed A3 Landscape

Louth County Council Record of Protected Structures Sheet No 20(a) Collon

- Protected Structure
- Proposed Protected Structure
- Proposed to be deleted from Register of Protected Structures



All Protected Structures within
this boundary are in the
Dundalk & Environs Plan

Draft Louth County Development Plan 2009 - 2015.
Record of Protected Structures.

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Existing Protected Structure	Lhs020-001	20	Ardee Street□, Collon	Round House	Shop	Corner sited former Methodist chapel, built c. 1820, now in commercial use. hexagonal plan, single storey with round headed windows. refurbished 2001	13828016
Existing Protected Structure	Lhs020-002	20	Ardee Street Collon	Former Erasmus Smith School & Adjoining House	House	Attached single-bay two-storey stone gable-fronted former Church of Ireland school built c.1770. single-bay two-storey entrance porch to south-east. Attached four-bay two-storey stone former school master's house, built c. 1870.	13828009
Existing Protected Structure	Lhs020-003	20	Ardee Street Collon	Donegans	Public House	End-of-terrace four-bay two-storey house, built c. 1880, formerly also in use as shop, now also in use as public house. Central pubfront to ground floor, integral carriage arch to south, two-storey lean-to return to east elevation.	13828005
Existing Protected Structure	Lhs020-004	20	Market Square Collon		House	Three interconnected two-storey houses, built c. 1850.	13828013
Existing Protected Structure	Lhs020-005	20	Town Square East□, Collon	Clock Tower Building	Apartment/flat (Purpose Built)	Detached eleven-bay single- two-storey stone former market house, built c. 1820, later used as court house, and subsequently converted for use as residential accommodation.	13828012
Existing Protected Structure	Lhs020-006	20	Town Square South□, Collon	2 Storey House	House	Attached three-bay two-storey house, built c. 1870.	13828011
Existing Protected Structure	Lhs020-007	20	Town Square South□, Collon	Two--storey house	House	Terraced three-bay two-storey house, built c. 1850. Split height with higher section to east and lower to west, return to rear.	13828010
Existing Protected Structure	Lhs020-008	20	Town Square South□, Collon	Two-storey house	House	c. 1830, three-bay, two-storey, recently re-furnished	
Existing Protected Structure	Lhs020-009	20	Drogheda Street□, Collon	Collon House	House	c.1740 Corner-sited attached five-bay three-storey house, built c. 1770. Rectangular-plan, extended by two-bays into two-storey terrace to east, three-bay two-storey wing to north, extended former mews buildings surrounding courtyard to north.	13828001
Existing Protected Structure	Lhs020-010	20	Drogheda Street□, Collon	Six Bay House	House	Terraced six-bay two-storey house, built c. 1780. Rectangular-plan south-facing main block with two further bays to west absorbed into adjoining property, two-storey return to north-east, square porch canopy to main door to south elevation. lime rendered	13828002
Existing Protected Structure	Lhs020-011	20	Lower Main Street, Collon	Church Of Ireland	Church	Freestanding gable-fronted Church of Ireland church, by D.A. Beaufort dated 1813, Diminutive version of King's College Chapel Cambridge.	13828018
Existing Protected Structure	Lhs020-012	20	Lower Main Street, Collon	Octagonal Water Pump	Pump	Freestanding water pump, erected 1822. Cut limestone octagonal shaft, blind trefoil panels, one bearing inscription "The Gift of the Reverend Alexander Bradford Late Vicar of Collon 1822".	13828020
Existing Protected Structure	LHS020-013	20	School Lane, Collon	The Bleach House	House	Detached, five-bay, two-storey rendered house, estimated date of building between 1750 – 1830. Oblong main block with lean-to extensions.	13828023
Proposed Protected Structure	LHS020-014	20	Drogheda Street,	Church Of Mary Immaculate	Church	Detached Roman Catholic church, built 1860-1877.	13828003


Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Proposed Protected Structure	LHS020-015	20	Drogheda Street,	Collon Parochial House	Parochial House	Detached three-bay two-storey parochial house, built 1898, no longer in use.	13828004
Proposed Protected Structure	LHS020-016	20	Ardee Street,	Two-bay Two-storey house	House	Terraced two-bay two-storey house, built c. 1880.	13828006
Proposed Protected Structure	LHS020-017	20	Green Lawns, Ardee Street,	Green Lawns	House	Attached four-bay two-storey house, built c. 1880. Integral carriage arch to south	13828007
Proposed Protected Structure	LHS020-018	20	Ardee Street,	School Master's House	House	Attached four-bay two-storey stone former school master's house, built c. 1870. Two-bay entrance block with lower two-bay wing to south set back slightly	13828008
Proposed Protected Structure	LHS020-019	20	Ardee Street,	Three-bay Single-storey house	House	Attached three-bay single-storey with half-dormer attic house, built c. 1880	13828017
Proposed Protected Structure	LHS020-020	20	Lower Street,	Three-bay Two-storey house	House	Attached three-bay two-storey house, built c. 1870. Central gabled dormer, cantd to north.	13828019
Proposed Protected Structure	LHS020-021	20	Lower Street,	Three-bay Two-storey house	House	Attached three-bay two-storey house, built c. 1900. Gable-fronted entrance porch to east, sun room to south, lean-to to rear (west).	13828021
Proposed Protected Structure	LHS020-022	20	Lower Street,	Bridge	Road Bridge	Single-span road-over-river bridge, built c. 1820.	13828022
Proposed Protected Structure	LHS020-023	20	School Lane,	Chimney	None	Freestanding brick chimney, built c. 1860. Square in plan, tapering to top. Red brick English bond shaft, projecting tooled limestone string course towards base. Located to west side of road with derelict single-storey buildings to south.	13828024

284975.2

18

311885.6

284975.2

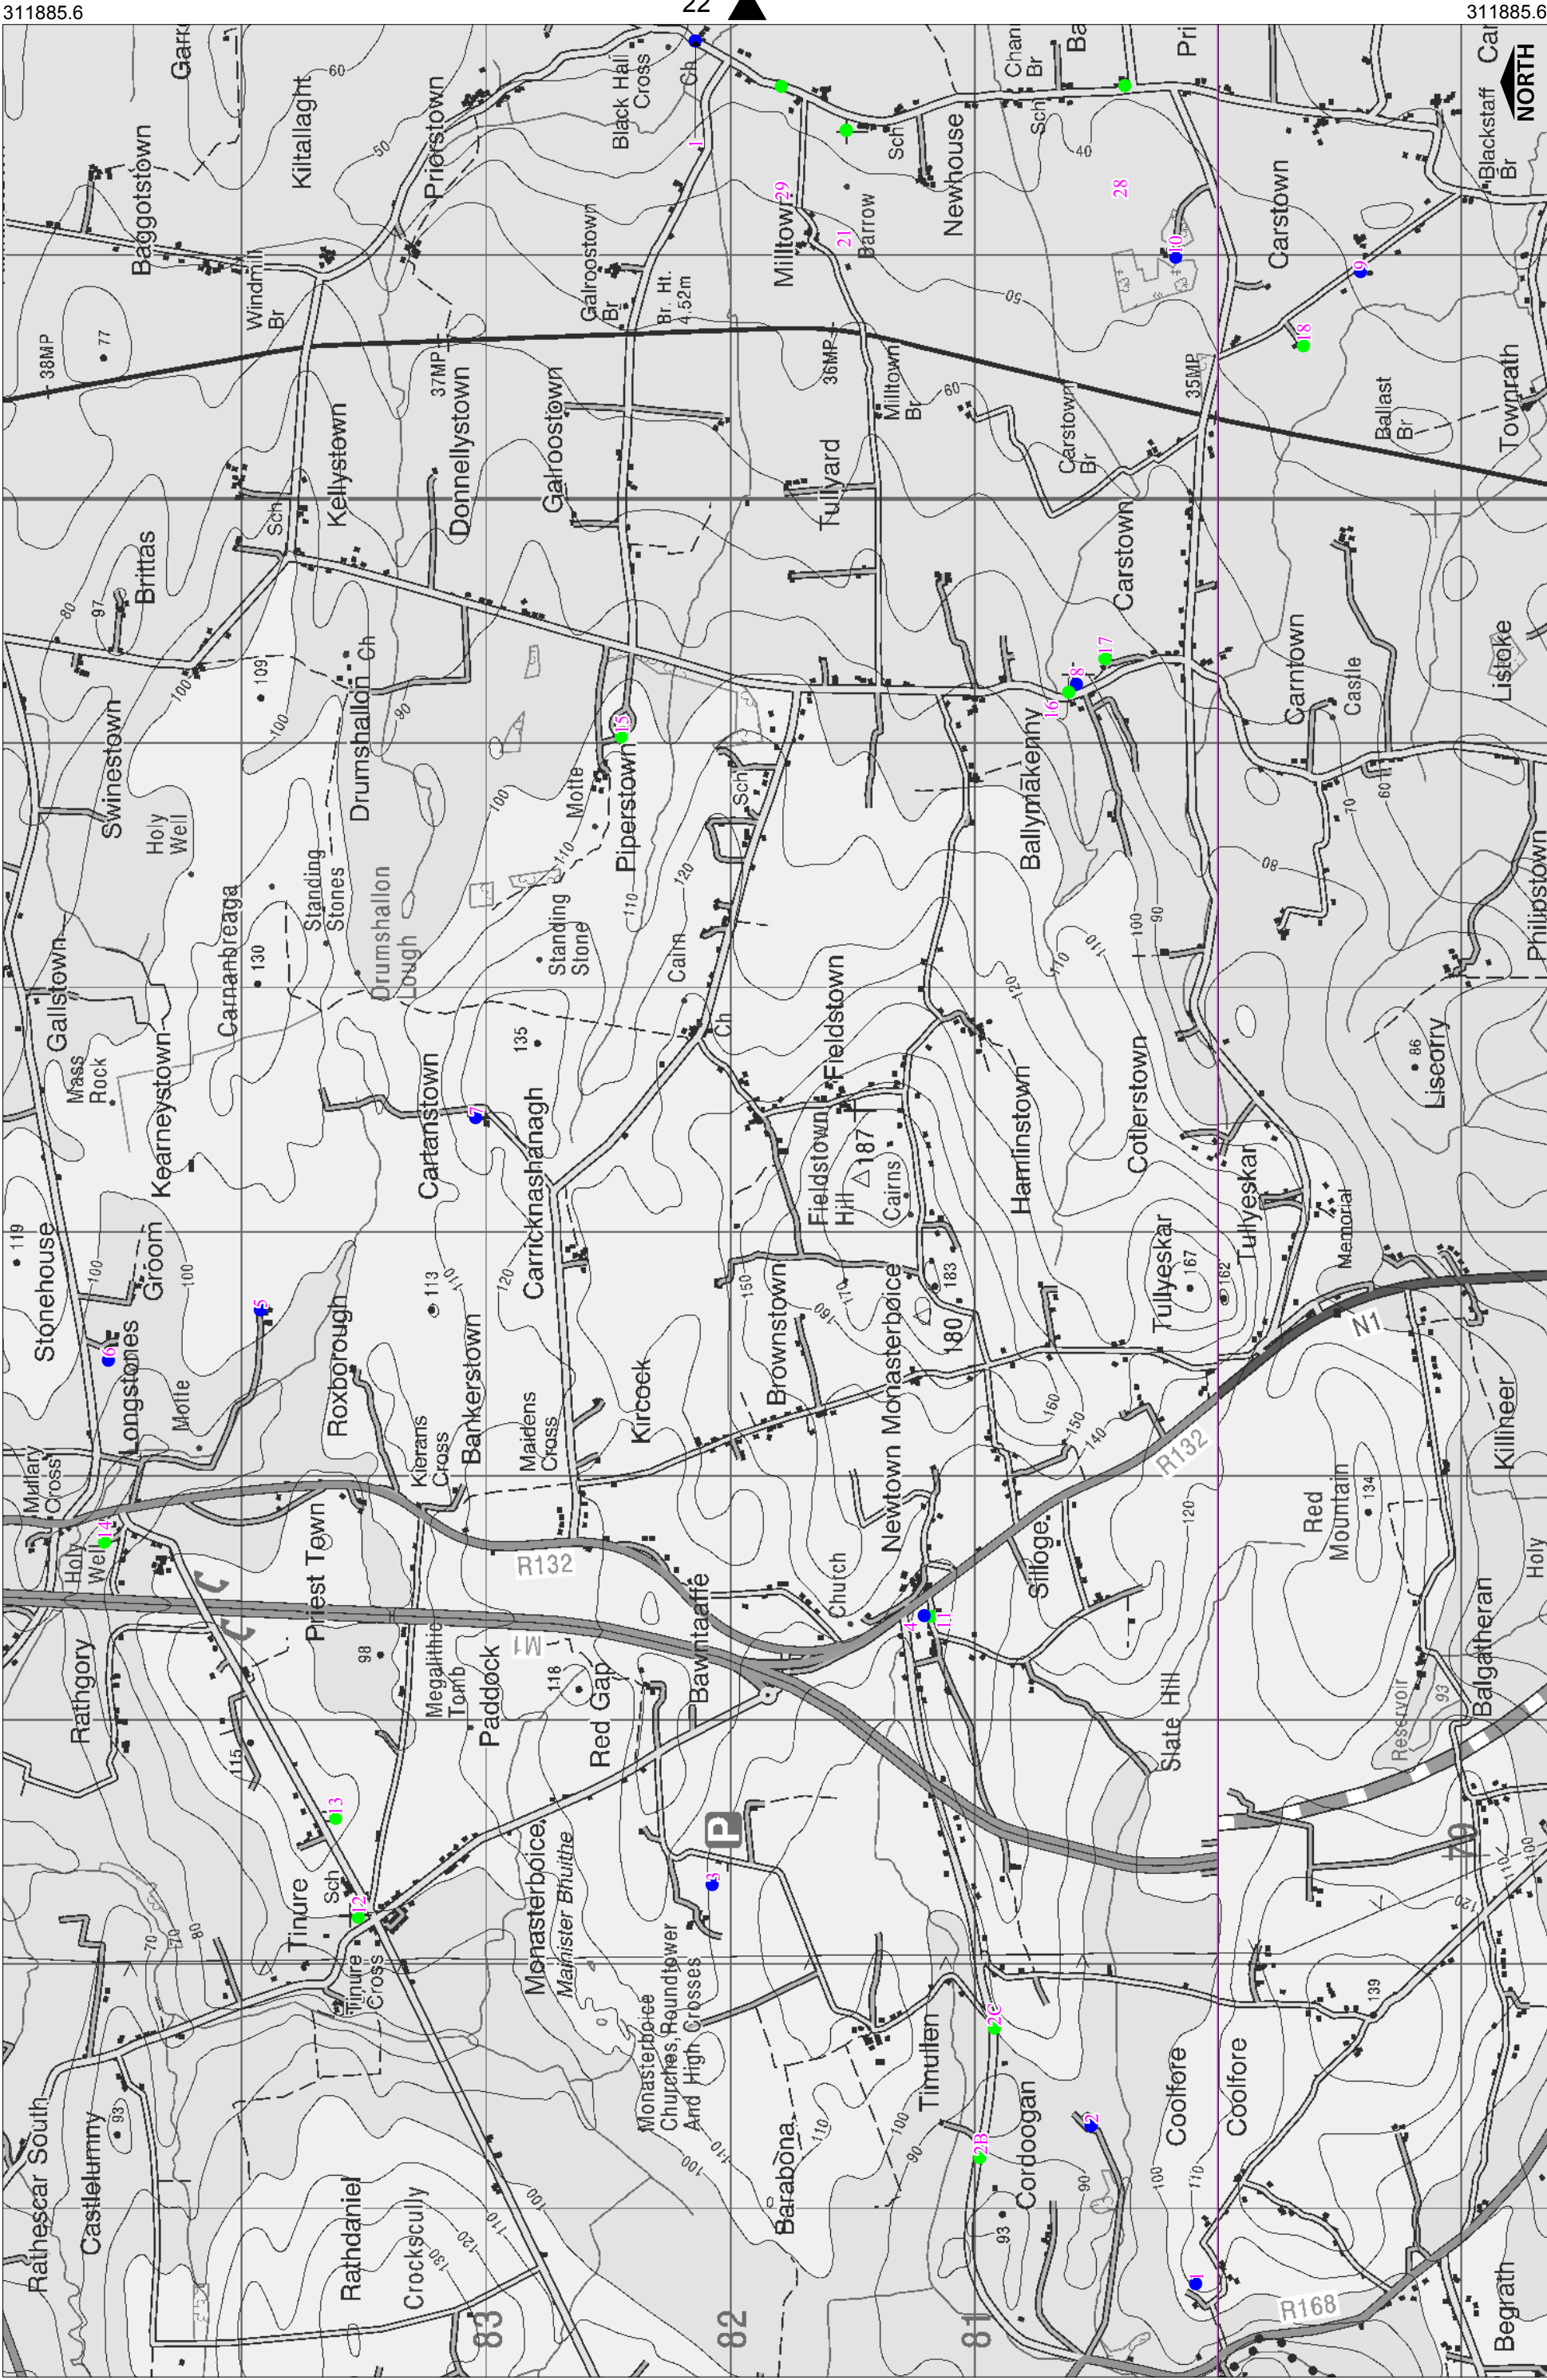

302243.2

311885.6

278645.8

278645.8

24

278645.8



Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie

Note: Details shown on this map are for information purposes only.
Further details on any item should be clarified with Louth County Council.
The map has been produced by Louth County Council with available Local Authority and Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number 2009/30/CCMA/LouthLocalAuthorities.

Not to scale when printed A3 Landscape

Louth County Council Record of Protected Structures Sheet No 21


- Protected Structure
- Proposed Protected Structure
- Proposed to be deleted from Register of Protected Structures

All Protected Structures within this boundary are in the Dundalk & Environs Plan

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Existing Protected Structure	Lhs021-001	21	Coolfore	Drummond Tower & Gate	Folly	Built in 1858 on site of medieval tower house, square plan, three-storey with battlemented parapet. includes freestanding monumental limestone entrance gateway, built 1869.	13902101
Existing Protected Structure	Lhs021-002	21	Cordoogan	Monasterboice House	House	Detached five-bay two-storey house, built c. 1820.	13902102
Proposed Protected Structure	LHS021-002B	21	Monasterboice Gate Lodge, Cordoogan	Monasterboice Gate Lodge	Gate Lodge	Detached three-bay single-storey former gate lodge, built c. 1880, with half-dormer attic. Now in use as private house.	13902103
Proposed Protected Structure	LHS021-002C	21	Monasterboice Gate House, Cordoogan	Monasterboice Gate House	Gate Lodge	Detached three-bay two-storey former gate lodge, built c. 1860, now in use as private dwelling.	13902104
Existing Protected Structure	Lhs021-003	21	Monasterboice	Round Tower, High Crosses, Church And Enclosures	Round Tower		
Existing Protected Structure	Lhs021-004	21	Newtownmonasterboice	Newtownmonasterboice Thatch	Thatched Cottage	Detached five-bay single-storey with attic thatched house, built c. 1780. Rectangular-plan, lobby entry with porch to central bay south elevation, lime rendered and whitewashed - OPW site 53	13902105
Existing Protected Structure	Lhs021-005	21	Stonehouse	Stonehouse Thatch	Thatched Cottage	five-bay two-storey stone/clay walled thatched house, rendered with porch -OPW site 52	
Existing Protected Structure	Lhs021-006	21	Stonehouse	Stone House	House	c. 1760, Gabled Detached five-bay three-storey over basement house, built c. 1760. Rectangular double-pile plan, single-storey addition to west c. 1800	13902110
Existing Protected Structure	Lhs021-007	21	Cartanstown	Cartanstown House	House	Detached seven-bay two-storey over basement house, built c. 1660. Rectangular-plan, pedimented central entrance bay to west, eighteenth- and nineteenth-century rectangular extensions to east, flat-roofed single-storey porch to south c. 1870.	13902111
Existing Protected Structure	Lhs021-008	21	Ballymakenny	St Nicholas' Church Of Ireland	Church	Freestanding former Church of Ireland church, by Francis Johnson, dated 1790. now in use as Baptist church. Rectangular-plan, limestone detailed stone pinnacled three-stage tower with octagonal spire to west.	13902114
Existing Protected Structure	Lhs021-009	21	Carstown	Belview Thatch	Thatched Cottage	Detached four-bay single-storey thatched house with dormer attic, built 1804. Rectangular-plan, lobby entry, gable-fronted porches to north and south elevations, extension to north, lean-to extension to east. Recently refurbished.	13902118
Existing Protected Structure	Lhs021-010	21	Carstown	Carstown House	House	Detached 5 bay single storey over basement with attic, dating from 1612, extended mid 17thC, rebuilt mid 18thC, incl. red brick lodges, piers and railings. Of National Importance.	13902116

Draft Louth County Development Plan 2009 - 2015.
Record of Protected Structures.

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Proposed Protected Structure	LHS021-011	21	Newtown Monasterboice	Outbuilding	Outbuilding (Non Domestic)	Group of five detached single-storey outbuildings, built c. 1780. Rectangular-plans. Pitched corrugated-iron roofs, verge copings. Rubble stone walling, main elevations whitewashed.	13902106
Proposed Protected Structure	LHS021-012	21	Tinure	St. Mary Immaculate Roman Catholic Church	Church	Freestanding Roman Catholic church, dated 1894. T-plan, cantled hipped roofed chancel to east, single-storey gabled sacristies to north and south of chancel, two-stage pinnacled entrance tower to south-west dated 1913.	13902107
Proposed Protected Structure	LHS021-013	21	Tinure	Former Parochial House	Parochial House	Detached three-bay two-storey former parochial house, built c. 1860, now in private domestic use.	13902108
Proposed Protected Structure	LHS021-014	21	Mullary House, Castletown	Mullary House	House	Detached three-bay two-storey house, built c. 1800.	13902109
Proposed Protected Structure	LHS021-015	21	Piperstown House, Piperstown	Piperstown House	Country House	Detached five-bay two-storey over basement house, built 1842. Rectangular-plan, two-storey return to west	13902112
Proposed Protected Structure	LHS021-016	21	Ballymakenny		School	Detached three-bay single-storey former school, built c. 1840, now in private domestic use. Rectangular-plan, single-storey lean-to extension to east.	13902113
Proposed Protected Structure	LHS021-017	21	East Rand, Ballymakenny	East Rand	Rectory	Detached three-bay two-storey former rectory, built c. 1790, later used as school, now in private domestic use. Extensively remodelled.	13902115
Proposed Protected Structure	LHS021-018	21	Belview, Carstown	Belview	House	Detached three-bay two-storey house built c. 1840, now derelict. Rectangular-plan, central gable-fronted porch to south, two-storey return and lean-to extensions to north.	13902117

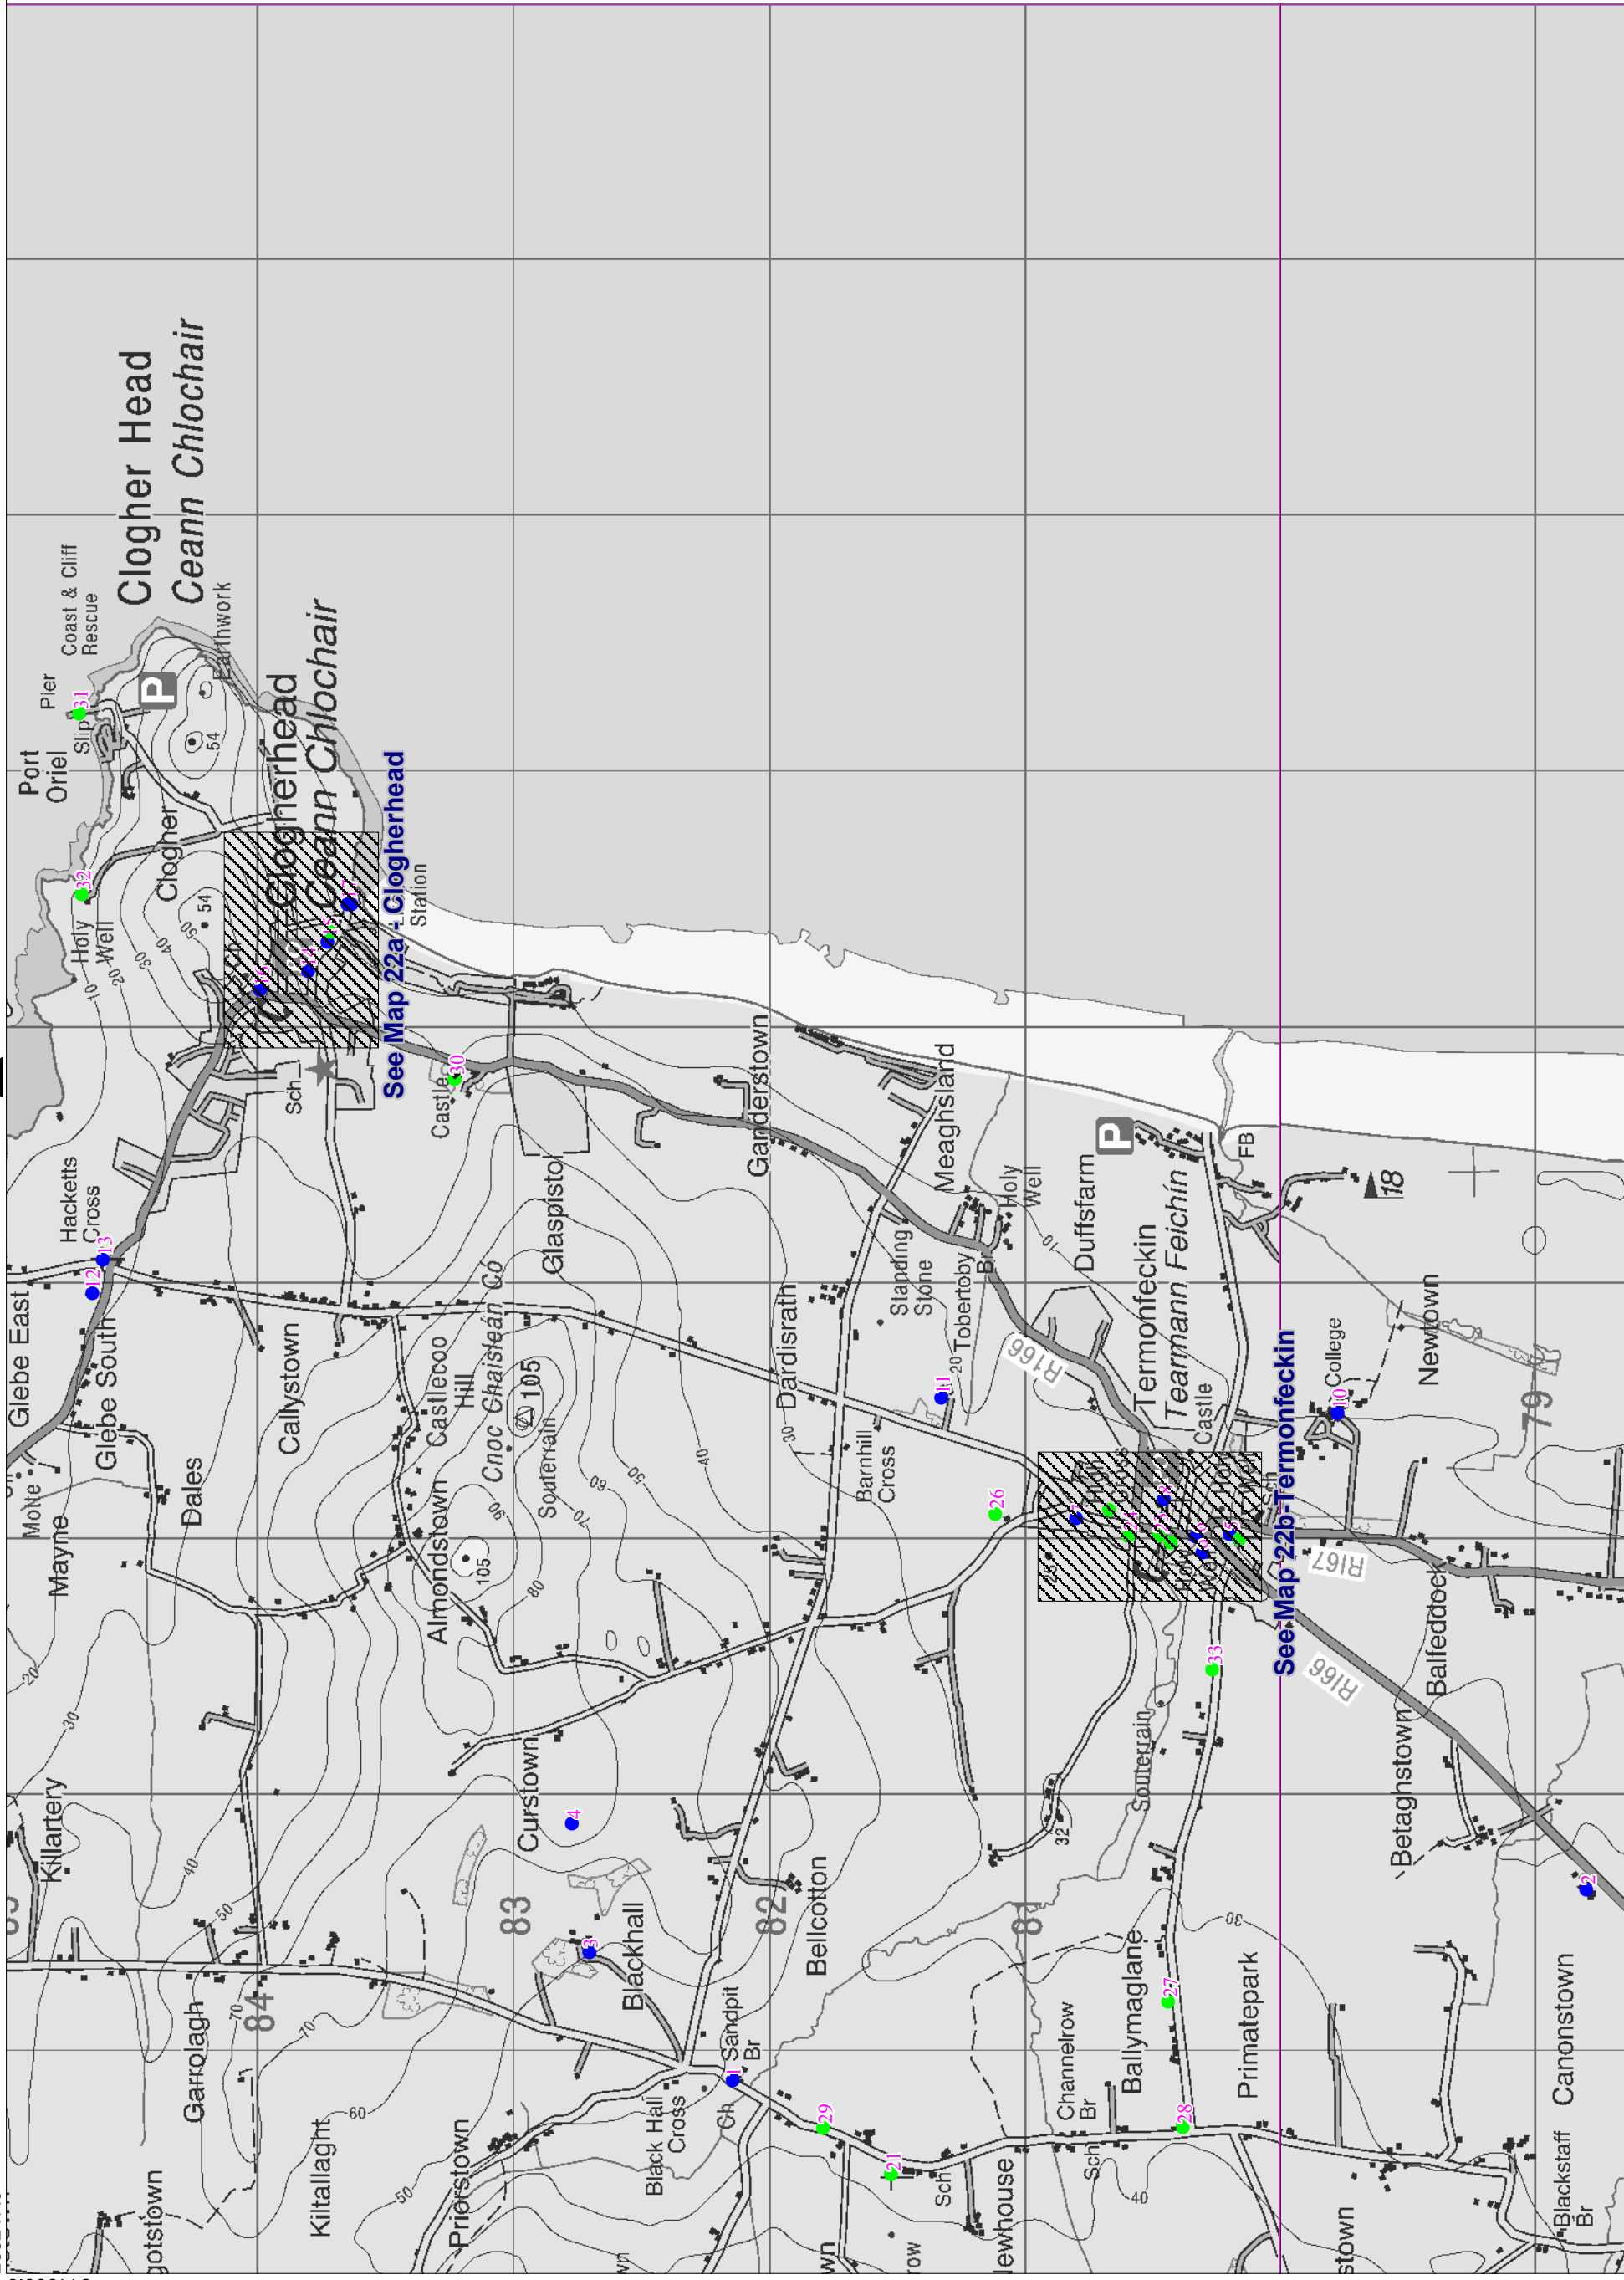

Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie

Note: Details shown on this map are for information purposes only.
Further details on any item should be clarified with Louth County Council.
The map has been produced by Louth County Council with available Local Authority and Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number 2009/30/CCMA/LouthLocalAuthorities.


Not to scale when printed A3 Landscape

Louth County Council Record of Protected Structures Sheet No 22

- Protected Structure
- Proposed Protected Structure
- Proposed to be deleted from Register of Protected Structures



All Protected Structures within this boundary are in the Dundalk & Environs Plan

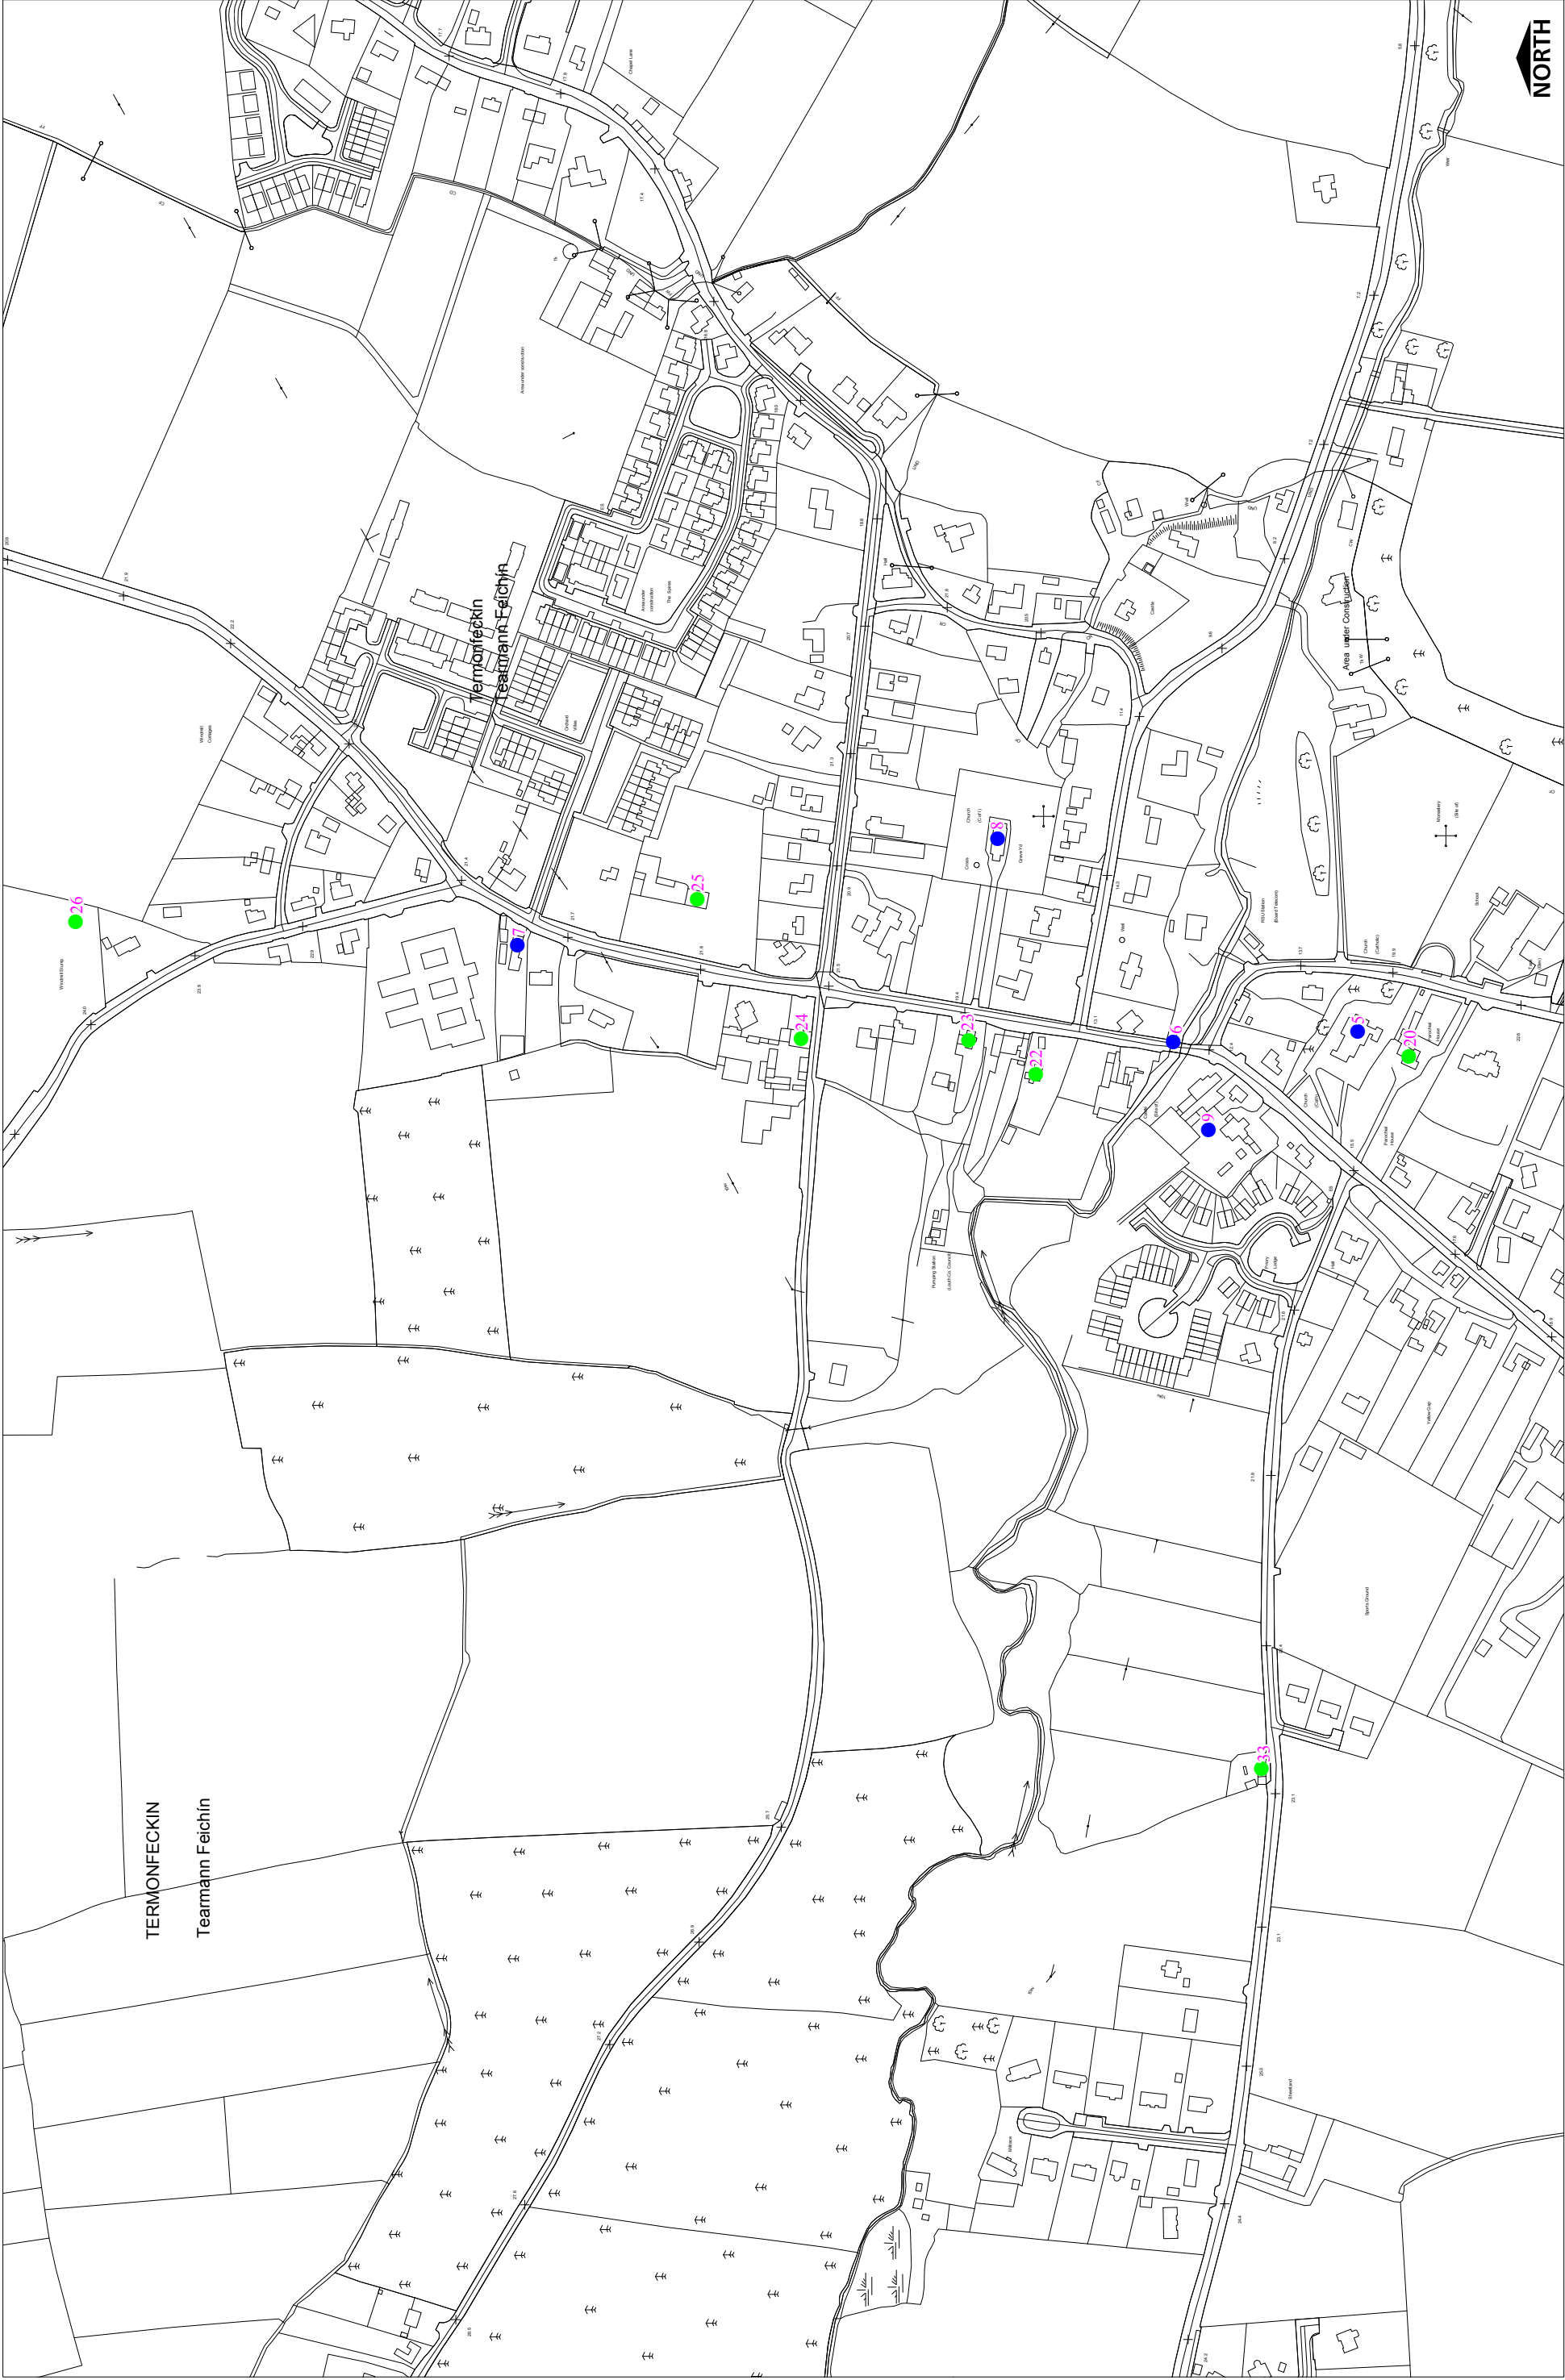

Louth County Council Record of Protected Structures Sheet No 22(b) Termonfeckin

Note: Details shown on this map are for information purposes only.
Further details on any item should be identified with Louth County Council.
The map has been produced by Louth County Council with available Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number 2009/00/CCLMA/LouthLocalAuthorities.

Not to scale when printed A3 Landscape

Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie




- Protected Structure
- Proposed Protected Structure
- Proposed to be deleted from Register of Protected Structures
- All Protected Structures within this boundary are in the Dundalk & Environs Plan

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Existing Protected Structure	Lhs022-001	22	Milltown	Sandpit House	Farm House	Detached five-bay two-storey farmhouse, built c. 1850. Rectangular-plan, shallow porch to south, two-storey extension to north.	13902205
Existing Protected Structure	Lhs022-002	22	Canonstown	Canonstown Thatch	Thatched Cottage	Five-bay single-storey stone walled thatched cottage with attic - OPW site 62	
Existing Protected Structure	Lhs022-003	22	Blackhall	Blackhall House	House	Detached three-bay two-storey over basement house, built c. 1790. Rectangular-plan, central bay west elevation slightly recessed with Ionic porch c. 1880, now closed in, closed in porch to south (garden) elevation.	13902207
Existing Protected Structure	Lhs022-004	22	Blackhall	Brick Folly Tower	Folly	Detached three-stage red brick crenellated tower, built c. 1850, as folly. Roofless. Red brick walling, crenellations originally rendered.	13902206
Existing Protected Structure	Lhs022-005	22	Termonfeckin	Church Of The Immaculate Conception	Church	Freestanding gable-fronted church, dated 1883. By William Hague, completed in 1883.	13834003
Existing Protected Structure	Lhs022-006	22	Termonfeckin	Bridge	Road Bridge	Double-arch road-over-river bridge, dated 1799.	13834004
Existing Protected Structure	Lhs022-007	22	Termonfeckin	Termonfeckin Thatch	Thatched Cottage	Three-bay single-storey stone/clay walled thatched cottage in farmyard - OPW site 61	
Existing Protected Structure	Lhs022-008	22	Termonfeckin	St Fechin's Church & High Cross	Church	Freestanding Church of Ireland church, dated 1792. Rectangular-plan nave, gable-ended chancel with lean-to sanctuary to east dated 1862, three-stage square-plan broached spire with clasping buttresses, pinnacles and cross finial dated 1904 to west.	13834007
Existing Protected Structure	Lhs022-009	22	Termonfeckin	Termonfeckin Castle	Towerhouse	15th C tower house, three-storey with battlemented roof walk, corbelled vault in upper chamber	
Existing Protected Structure	Lhs022-010	22	Newtown	Newtown House / An Grianan	House	Detached three-bay two-storey former country house, built c. 1870, incorporating fabric of earlier eighteenth century building, now in use as adult education centre.	13834001
Existing Protected Structure	Lhs022-011	22	Dardisrath	Rath House	House	Palladian House, five-bay, two-storey over basement with breakfront with lunette window, mid to late 18thC. replacement windows.	13902201
Existing Protected Structure	Lhs022-012	22	Callystown	Parochial House	Parochial House	Square, three-bay two-storey house with breakfront, hipped roof with bracketed eaves and four brick chimneys,	13902212
Existing Protected Structure	Lhs022-013	22	Callystown	St Michael's Church	Church	Freestanding gable-fronted Roman Catholic church. 1856, by John Murray, six-bay lancet hall of coursed rubble with limestone trim, west entrance gable with corner buttresses. to north, flat-roofed extension to north, raised gable-fronted porch, dated 2000	13902211
Existing Protected Structure	Lhs022-014	22	Callystown	Callystown Thatch	House	Three-bay, one and a half storey stone walled thatched cottage with eyebrow windows. built c. 1800. Lobby entry, slightly protruding porch to south (main) elevation. -OPW site 56	13827001
Existing Protected Structure	Lhs022-015	22	Callystown	Callystown Thatch	Thatched Cottage	Three-bay single storey stone walled whitewashed thatched cottage. OPW site 58	13827002

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Existing Protected Structure	Lhs022-016	22	Main Street□□Clogher	The Sail Inn	Public House	c.1850 three-bay single storey stone walled thatched house with projecting porch. Now in use as a public house - OPW site 55	13827007
Existing Protected Structure	Lhs022-017	22	The Slip□□Callystown	Clogherhead Slip Thatch	House	Semi detached four-bay two-storey thatched house, built c. 1800. Cement rendered and whitewashed, single-storey gabled entrance porch to centre of west elevation, attached to parallel outbuilding east of main house. Lobby entry - OPW site 59	13827004
Existing Protected Structure	Lhs022-018	22	The Slip□□Callystown	Clogherhead Slip Thatch	House	Terraced four-bay two-storey thatched house, built c. 1800. semi-detached, rendered and whitewashed. Lobby entry with slightly projecting porch to centre of west elevation, attached to outbuilding east by flat-roofed extension - OPW site 60	13827005
Proposed Protected Structure	LHS022-019	22	Crooked Street,□□Callystown		Farmyard Complex	Range of farm buildings, built c. 1810.	13827003
Proposed Protected Structure	LHS022-020	22	Termonfeckin	Termonfeckin Parochial House	Curate's House	Detached multiple-bay two-storey parochial house, built c. 1890. Off-set double-pile main block, with single-storey flat-roofed porches at junctions to north-west and south-east, two-bay gable-fronted addition to north c. 1930.	13834002
Proposed Protected Structure	LHS022-021	22	Milltown	St. Mary's Roman Catholic Church	Church	Freestanding double-height single-cell Roman Catholic Church, dated 1846, with six-bay nave side elevations, single-bay three-stage entrance tower to east and single-bay single-storey vestry to west.	13902214
Proposed Protected Structure	LHS022-022	22	Termonfeckin	Three-bay Two-storey house	House	Detached three-bay two-storey house, built 1912. Rectangular-plan, extended to north, 1936, with lean-to extensions to east and west elevations, projecting gable-fronted porch to centre of south elevation.	13834005
Proposed Protected Structure	LHS022-023	22	Termonfeckin	Three-bay Single Storey House	House	Detached three-bay single-storey with attic house, built c. 1920. Gable-fronted central bay and projecting single-storey gable-fronted porch to main (south) elevation, two-storey timber extension to north.	13834006
Proposed Protected Structure	LHS022-024	22	Highfield House	Highfield House	House	Detached five-bay two-storey house, built c. 1725. Rectangular-plan, projecting single-storey porch to centre of front (east) elevation, two-storey former dairy to west, renovated 1982.	13834008
Proposed Protected Structure	LHS022-025	22	Termonfeckin		Curate's House	Detached three-bay two-storey over basement former rectory, built c. 1840, now in use as private house. Rectangular-plan, single-storey porch added to west.	13834009
Proposed Protected Structure	LHS022-026	22	Termonfeckin	Windmill	Wind Mill	Freestanding circular-plan windmill, built c. 1800. Random coursed limestone walling. Square-headed window openings and door openings to east and west, stone relieving arch to door openings. Located on a rising to the north of Termonfeckin.	13834010
Proposed Protected Structure	LHS022-027	22	Carstown	Worker's House	House	Detached three-bay two-storey stone former worker's house, built c. 1860, now in private domestic use. Extension to north and gabled central breakfront to south	13902202
Proposed Protected Structure	LHS022-028	22	Carstown	Worker's House	House	Detached three-bay two-storey former worker's house, built c. 1860, now in private domestic use and undergoing extensive renovation. Extension to north under construction	13902203

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Proposed Protected Structure	LHS022-029	22	Milltown	Sand Pit	Farm House	Detached three-bay two-storey house, built c. 1820. Rectangular-plan, gable-fronted porch to west, porch to east.	13902204
Proposed Protected Structure	LHS022-030	22	Glaspistol House, Glaspistol,	Glaspistol House	House	Detached three-bay two-storey house, built c. 1820. L-plan, portico to east, conservatory to south, lean-to and single-storey extensions to west, bathroom to first floor west elevation on cast-iron columns c. 1880.	13902208
Proposed Protected Structure	LHS022-031	22	Clogher	Port Oriel Pier	Pier/jetty	Concrete pier, built c. 1900. Rectangular-plan, projects northwards into sea, currently being extended to east, stepped storm wall to east.	13902209
Proposed Protected Structure	LHS022-032	22	Clogher	Fethis	Farm House	Pair of semi-detached single-storey houses, built c. 1800, amalgamated into single dwelling. Currently unoccupied. Three- and four-bay rectangular blocks set to L-plan with basement to north, lean-to porches to east and south.	13902210
Proposed Protected Structure	LHS022-033	22	Termonfeckin	Four-bay Two-storey house	House	Detached four-bay two-storey house, built c. 1800.	13902213

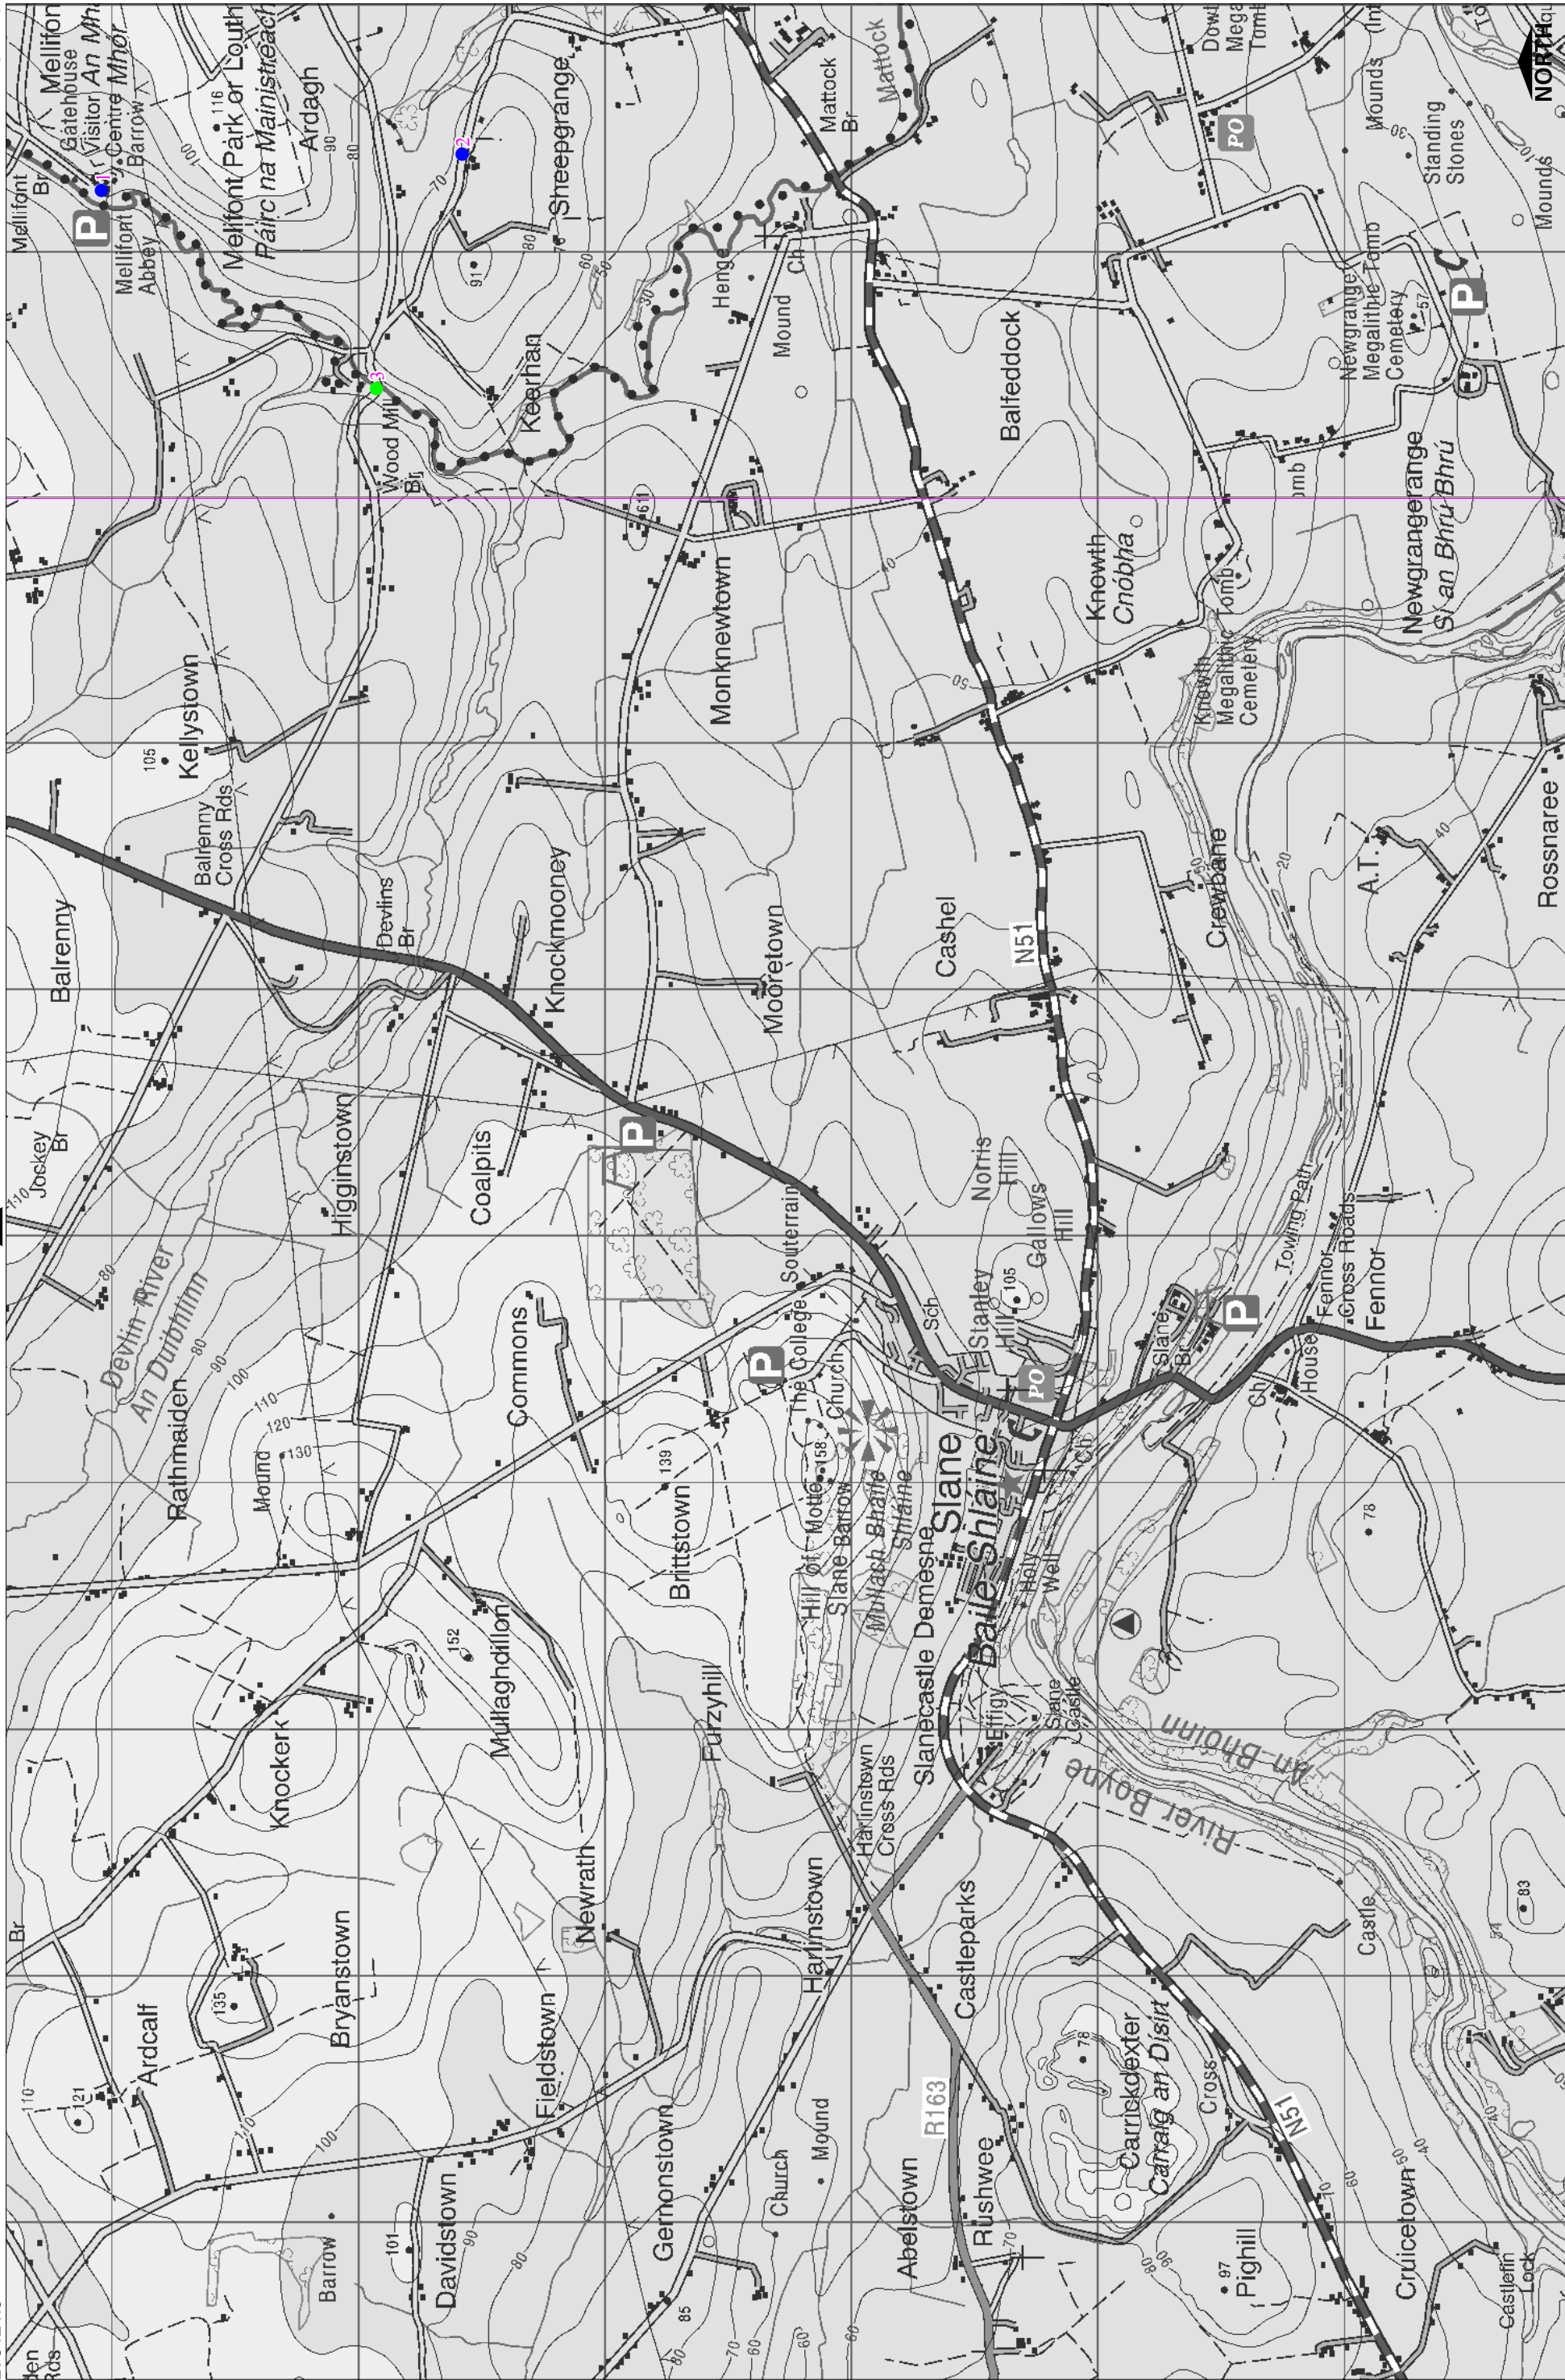


**Louth County Council
Record of Protected Structures
Sheet No 23**

Note: Details shown on this map are for information purposes only.
Further details on any item should be clarified with Louth County Council.
The map has been produced by Louth County Council with available Local Authority and Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number: 2009/30/COWALouth.localAuthorities.

Not to scale when printed A3 Landscape



Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Existing Protected Structure	Lhs023-001	23	Mellifont	Cistercian Abbey	Abbey	Abbey founded 1142, largely rebuilt in C14 with C15 additions, now a ruin.	
Existing Protected Structure	Lhs023-002	23	Sheepgrange	Sheepgrange Thatch	Thatched Cottage	Four-bay single-storey stone walled thatched cottage, replacement windows and door - OPW site 63	
Proposed Protected Structure	LHS023-003	23	Woodmill Bridge	Woodmill Bridge	Road Bridge	Single-arch road bridge over Mattock River, built c. 1840.	13902302

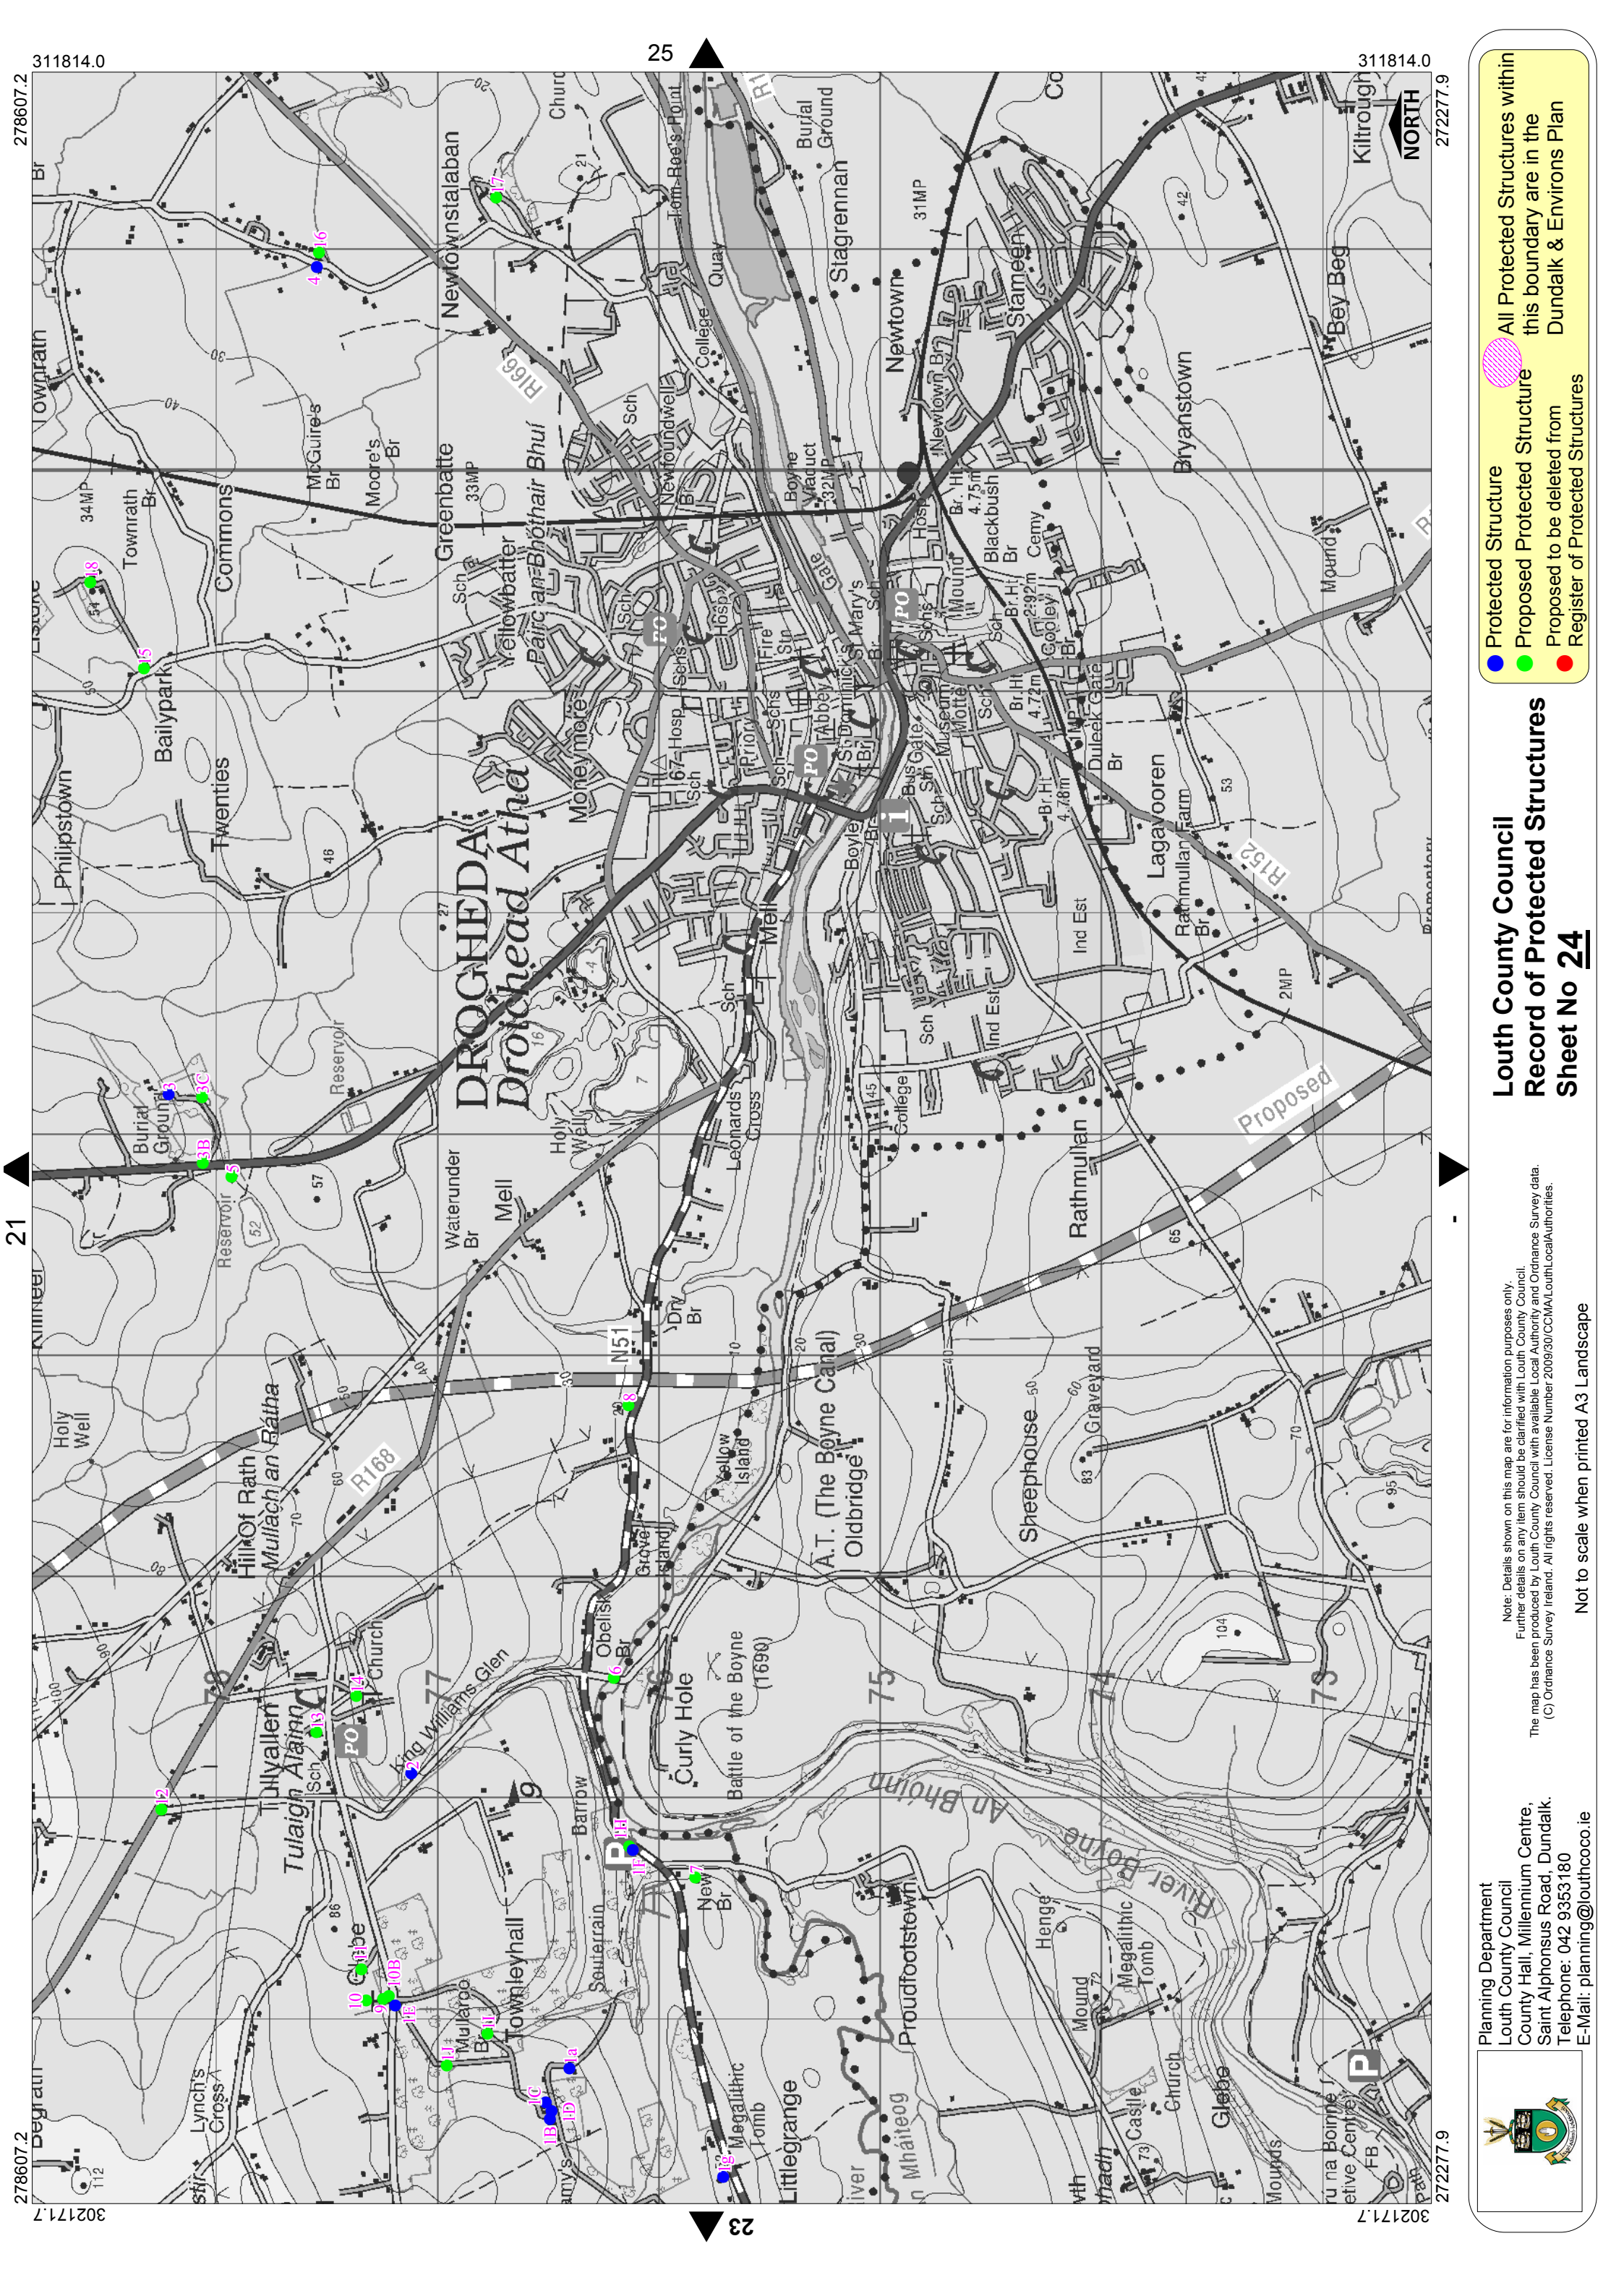

Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie

Note: Details shown on this map are for information purposes only.
Further details on any item should be clarified with Louth County Council.
The map has been produced by Louth County Council with available Local Authority and Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number 2009/30/CCMA/LouthLocalAuthorities.

Not to scale when printed A3 Landscape

Louth County Council Record of Protected Structures Sheet No 24


- Protected Structure
- Proposed Protected Structure
- Proposed to be deleted from Register of Protected Structures
- All Protected Structures within this boundary are in the Dundalk & Environs Plan

Draft Louth County Development Plan 2009 - 2015.
Record of Protected Structures.

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Existing Protected Structure	Lhs024-001a	24	Townley Hall	Townley Hall	House	Detached seven-bay two-storey over basement with attic country house, by Thomas Cooley and Francis Johnson, dated 1794.	13902414
Existing Protected Structure	Lhs024-001b	24	Townley Hall	Townley Hall Mews	House	Stone outbuildings, built c. 1795, some now converted to domestic use. Three courtyards with detached four-bay two-storey stone building to east.	13902415
Existing Protected Structure	Lhs024-001c	24	Townley Hall	Townley Hall Outbuilding	Outbuilding (Domestic)	Stone outbuildings, built c. 1795, some now converted to domestic use. Three courtyards with detached four-bay two-storey stone building to east.	13902415
Existing Protected Structure	Lhs024-001d	24	Townley Hall	Townley Hall Coach House	Outbuilding (Domestic)	Stone outbuildings, built c. 1795, some now converted to domestic use. Three courtyards with detached four-bay two-storey stone building to east.	13902415
Existing Protected Structure	Lhs024-001e	24	Townley Hall,	Townley Hall - Church Lodge	Gate Lodge	Detached three-bay single-storey with attic gate lodge, built c. 1820. T-plan, single-storey flat-roofed and lean-to extensions to east and north, c. 1980.	13902419
Existing Protected Structure	Lhs024-001f	24	Townley Hall	Townley Hall - Boyne Lodge	Gate Lodge	Detached three-bay single-storey stone gate lodge, built c. 1820. Tetrastyle pedimented portico to north on Greek Doric columns	13902412
Existing Protected Structure	Lhs024-001g	24	Townley Hall	Passage Grave	Passage Grave		
Proposed Protected Structure	LHS024-001H	24	Townleyhall	Townley Hall Gateway	Gates/railings	Gateway, built c. 1810.	13902411
Proposed Protected Structure	LHS024-001I	24	Mullaroo Bridge, Townley Hall	Mullaroo Bridge	Road Bridge	Single-arch stone road bridge over river, built c. 1750. Spans the Old Glen River within Townley Hall Demesne.	13902416
Proposed Protected Structure	LHS024-001J	24	Townley Hall	Townley Hall Ice House	Icehouse	Freestanding brick icehouse, built c. 1800, now disused and overgrown.	13902417
Existing Protected Structure	Lhs024-002	24	Tullyallen	King William's Glen Cottage	Cottage	Detached four-bay two-storey whitewashed rubble stone cottage, built c. 1830.	13902426
Existing Protected Structure	Lhs024-003	24	Killineer	Killineer House	House	1835, early Italianate house. Detached six-bay two-storey with projecting single-storey Doric porch and three-bay side elevations.	13902430
Proposed Protected Structure	LHS024-003B	24	Killineer	Killineer House Gate Lodge	Gate Lodge	Detached three-bay single-storey gate lodge, built 1836. Engaged Doric portico to south, fully-engaged extension c. 1870 and lean-to extension to north.	13902428
Proposed Protected Structure	LHS024-003C	24	Killineer	Killineer House Summer House	Summerhouse	Detached two-bay single-storey summer house, built c. 1850. Hipped slate roof with rendered chimneystack. Rendered walls with render pilasters to corners. Timber sliding sash windows. Double-leaf timber glazed doors.	13902429
Existing Protected Structure	Lhs024-004	24	Newtownstalaban	Morgans Pub Thatch	House	Detached six-bay single-storey with attic, thatched house with dry dash render, built c. 1850, formerly with public house to north, now disused- OPW site 68	13902434

Draft Louth County Development Plan 2009 - 2015.
Record of Protected Structures.

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Proposed Protected Structure	Lhs024-005	24	Kilineer	Kilineer Farmhouse	House	Five-bay, two-storey lime rendered farmhouse, built c.1830. Long sash windows to ground floor, incl. Outbuilding, boundary walls, gates and piers	13902427
Proposed Protected Structure	LHS024-006	24	Townleyhall	Obelisk Bridge	Road Bridge	Single-span iron girder road bridge over River Boyne, built 1868, on rock-faced limestone piers. Suspended repair gantry to underside.	13902410
Proposed Protected Structure	LHS024-007	24	Little Grange	Two-storey house	House	Detached two-storey house, built c. 1860. Pitched slate roof with rendered chimneystack. Rendered walls with limestone quoins and string course. Timber sliding sash windows.	13902413
Proposed Protected Structure	LHS024-008	24	Tullyallen	Drybridge House	House	Detached five-bay two-storey house, built c. 1820. Porch to south, attached outbuilding to west.	13902409
Proposed Protected Structure	LHS024-009	24	Townleyhall	Mellifont School	School	Detached four-bay single-storey timber former school, built c. 1930, now disused. Rectangular-plan, porches to north, lean-to to south	13902418
Proposed Protected Structure	LHS024-010	24	Townleyhall	Church Of Ireland	Church	Freestanding Board of First Fruits style former church, dated 1814, now in private domestic use.	13902421
Proposed Protected Structure	LHS024-010B	24	Townleyhall	Outbuilding	Outbuilding (Domestic)	Detached six-bay single-storey outbuilding, built c. 1870. Rectangular-plan. Pitched corrugated-iron roof.	13902420
Proposed Protected Structure	LHS024-011	24	Mellifont Rectory, Glebe	Mellifont Rectory	Rectory	Detached two-bay two-storey rendered former rectory, built c. 1815, now in private domestic use.	13902422
Proposed Protected Structure	LHS024-012	24	-	Former Thatched House & Farming Complex	House	Detached four-bay single-storey lobby-entry formerly thatched house, built c. 1820, now disused. Projecting lean-to entrance porch and outshot to east elevation, attached to outbuilding to south.	13902423
Proposed Protected Structure	LHS024-013	24	Tullyallen	Parochial House	Parochial House	Detached three-bay two-storey parochial house, built c. 1900. L-plan, gable-fronted porch to south, return and lean-to extension to north.	13902424
Proposed Protected Structure	LHS024-014	24	Tullyallen	Mellifont Parish Church	Church	Freestanding Roman Catholic church, dated 1898, renovated, 2001. Cruciform-plan, engaged three stage tower with octagonal spire to south-east. Third stage of tower and spire, added 2001.	13902425
Proposed Protected Structure	LHS024-015	24	Listoke, □□ballymakenny Road□□Commons	Listoke Gate Lodge	Gate Lodge	Detached three-bay single-storey former gate lodge, built c. 1860, now in private domestic use. Projecting gable-fronted porch to south, flat-roofed extension to north.	13902432
Proposed Protected Structure	LHS024-016	24	Newtownstalaban		House	Detached three-bay two-storey house, built c. 1825. Lower two-storey pitched roof return to north-west, external steps to north gable of return.	13902435
Proposed Protected Structure	LHS024-017	24	Newtown House, Newtownstalaban	Newtown House	House	Detached seven-bay two-storey house, built c. 1830.	13902436
Proposed Protected Structure	LHS024-018	24	Listoke Estate□□Ballymakenny Rd	Listoke Estate		Modest demesne of pre 1837 House which is now demolished. Surrounding outhouses remain, including a fine five bay split level two storey dwelling, with render finish, brick window surrounds & four brick chimneys	

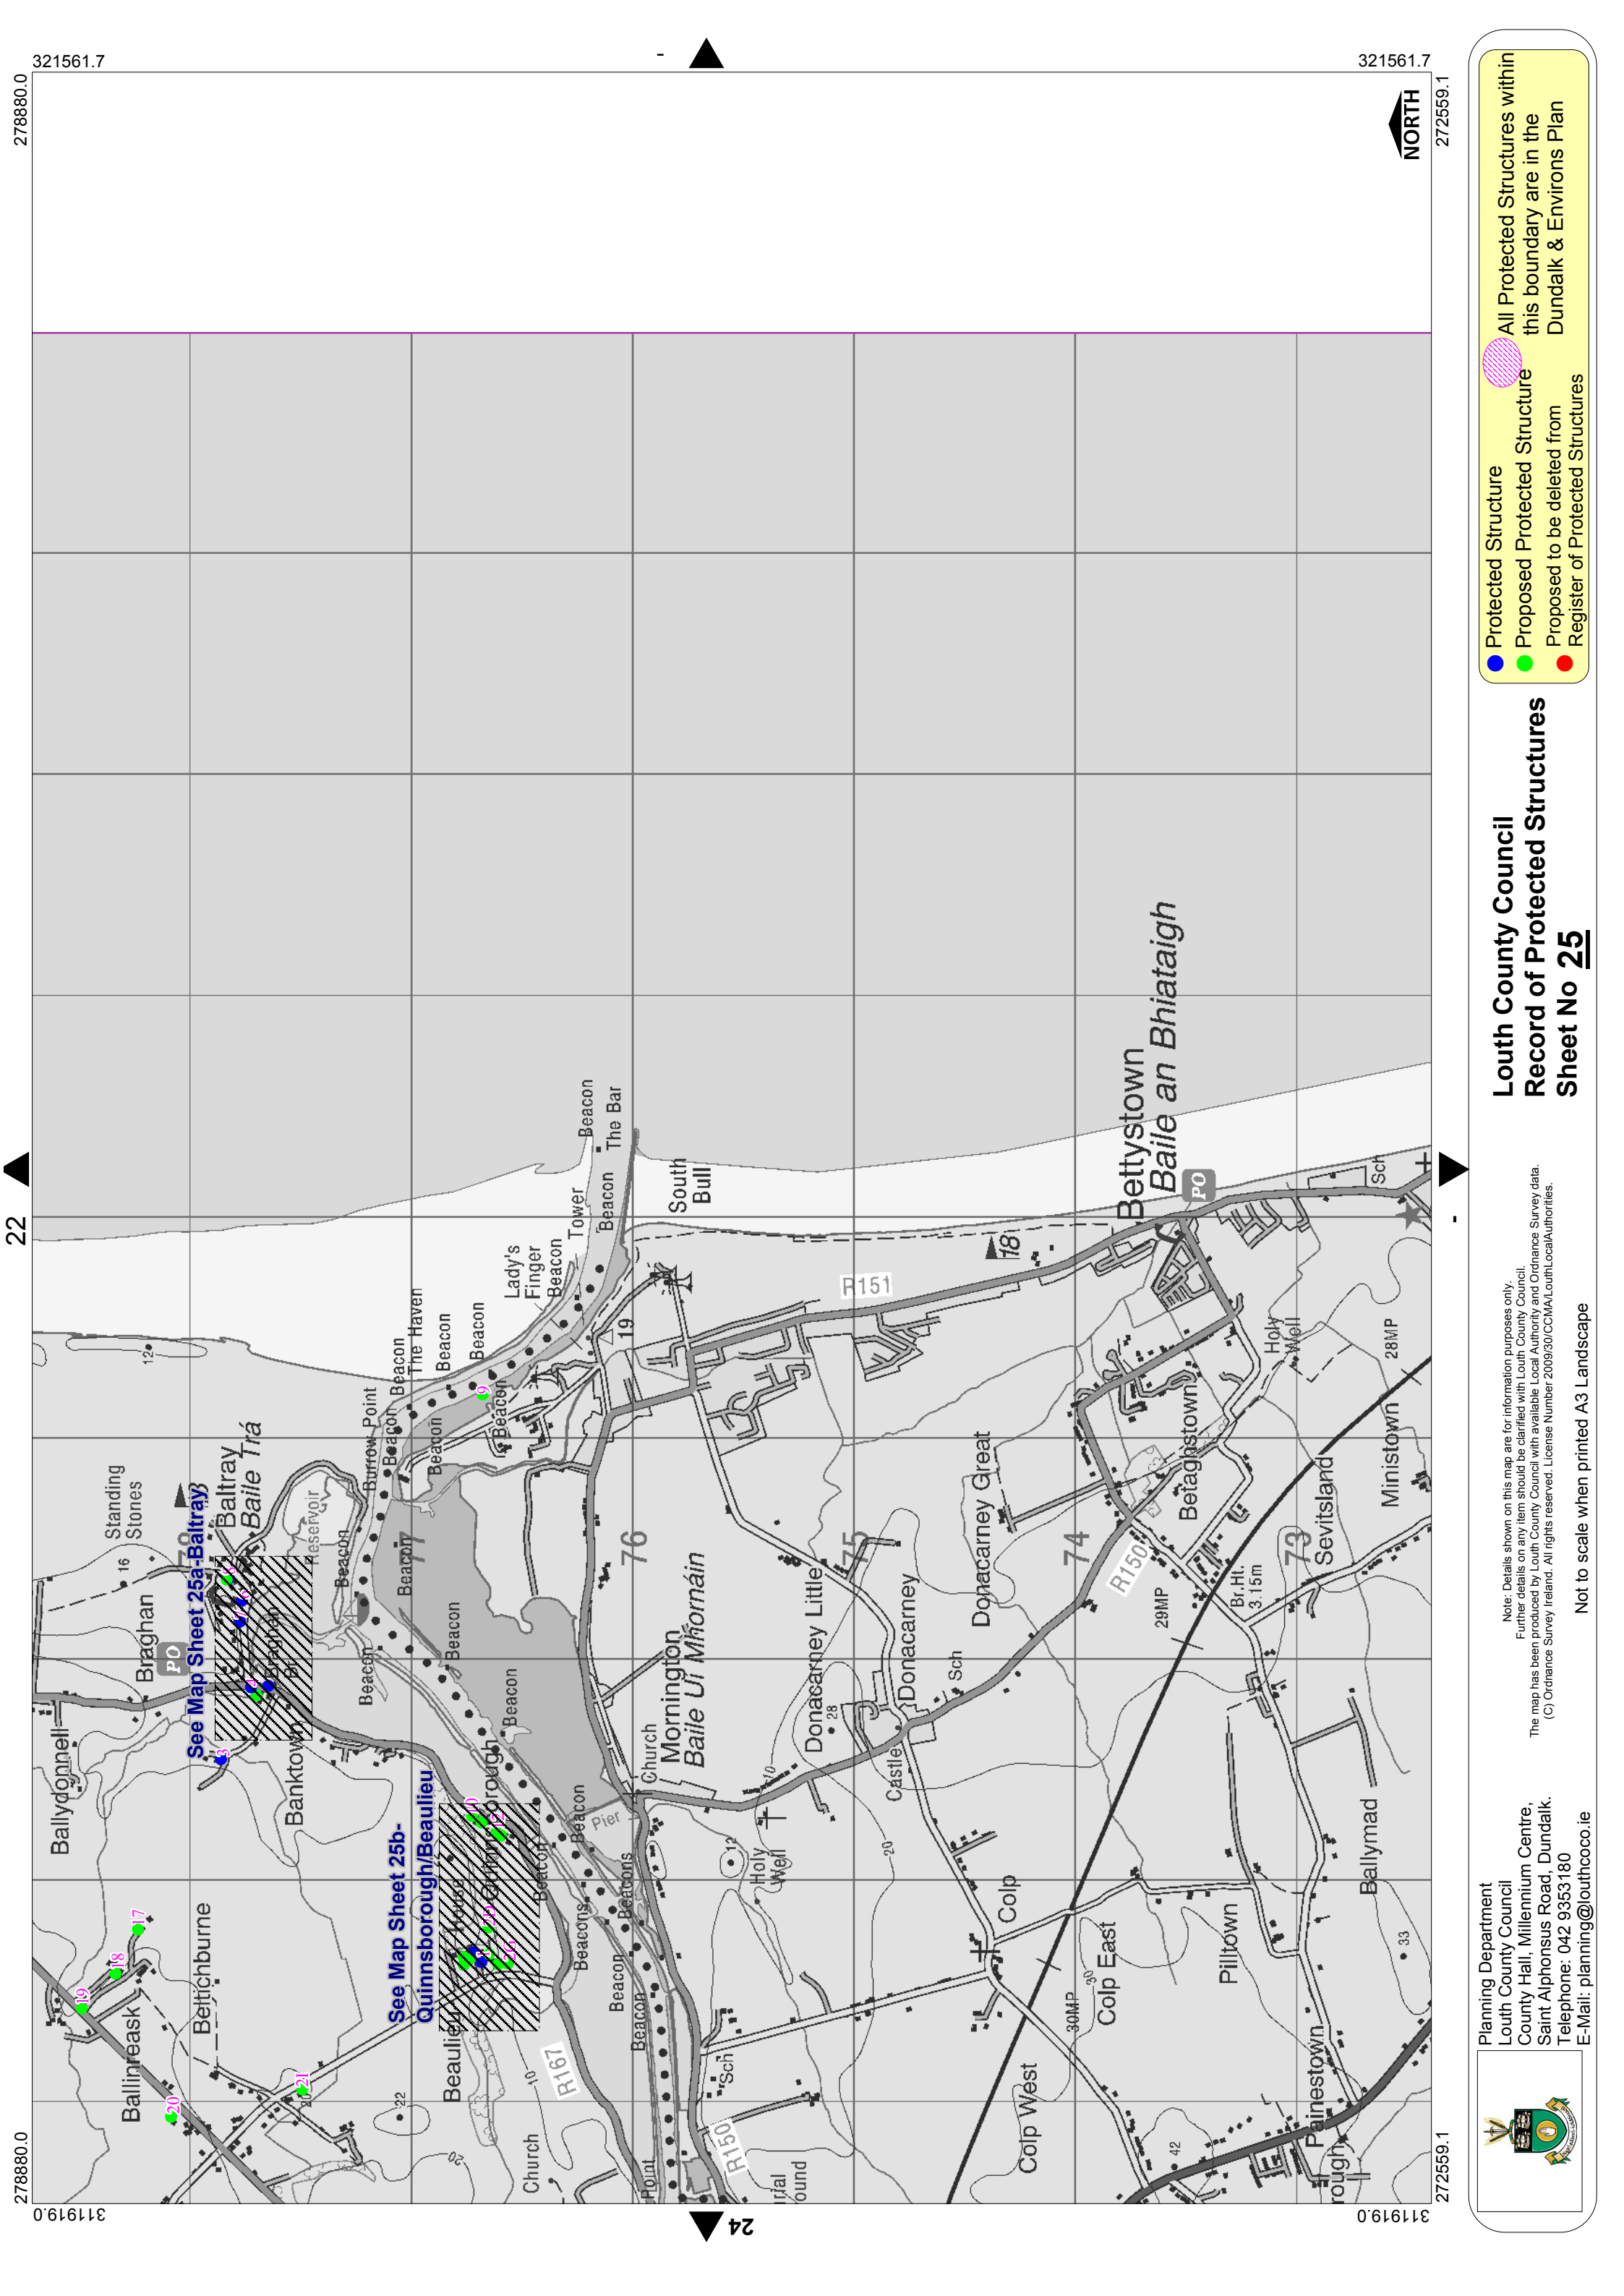


Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie

Note: Details shown on this map are for information purposes only.
Further details on any item should be clarified with Louth County Council.
The map has been produced by Louth County Council with available Local Authority and Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number 2009/30/CCMA/LouthLocalAuthorities.
Not to scale when printed A3 Landscape

Louth County Council Record of Protected Structures Sheet No 25

- Protected Structure
- Proposed Protected Structure
- Proposed to be deleted from Register of Protected Structures
- All Protected Structures within this boundary are in the Dundalk & Environs Plan

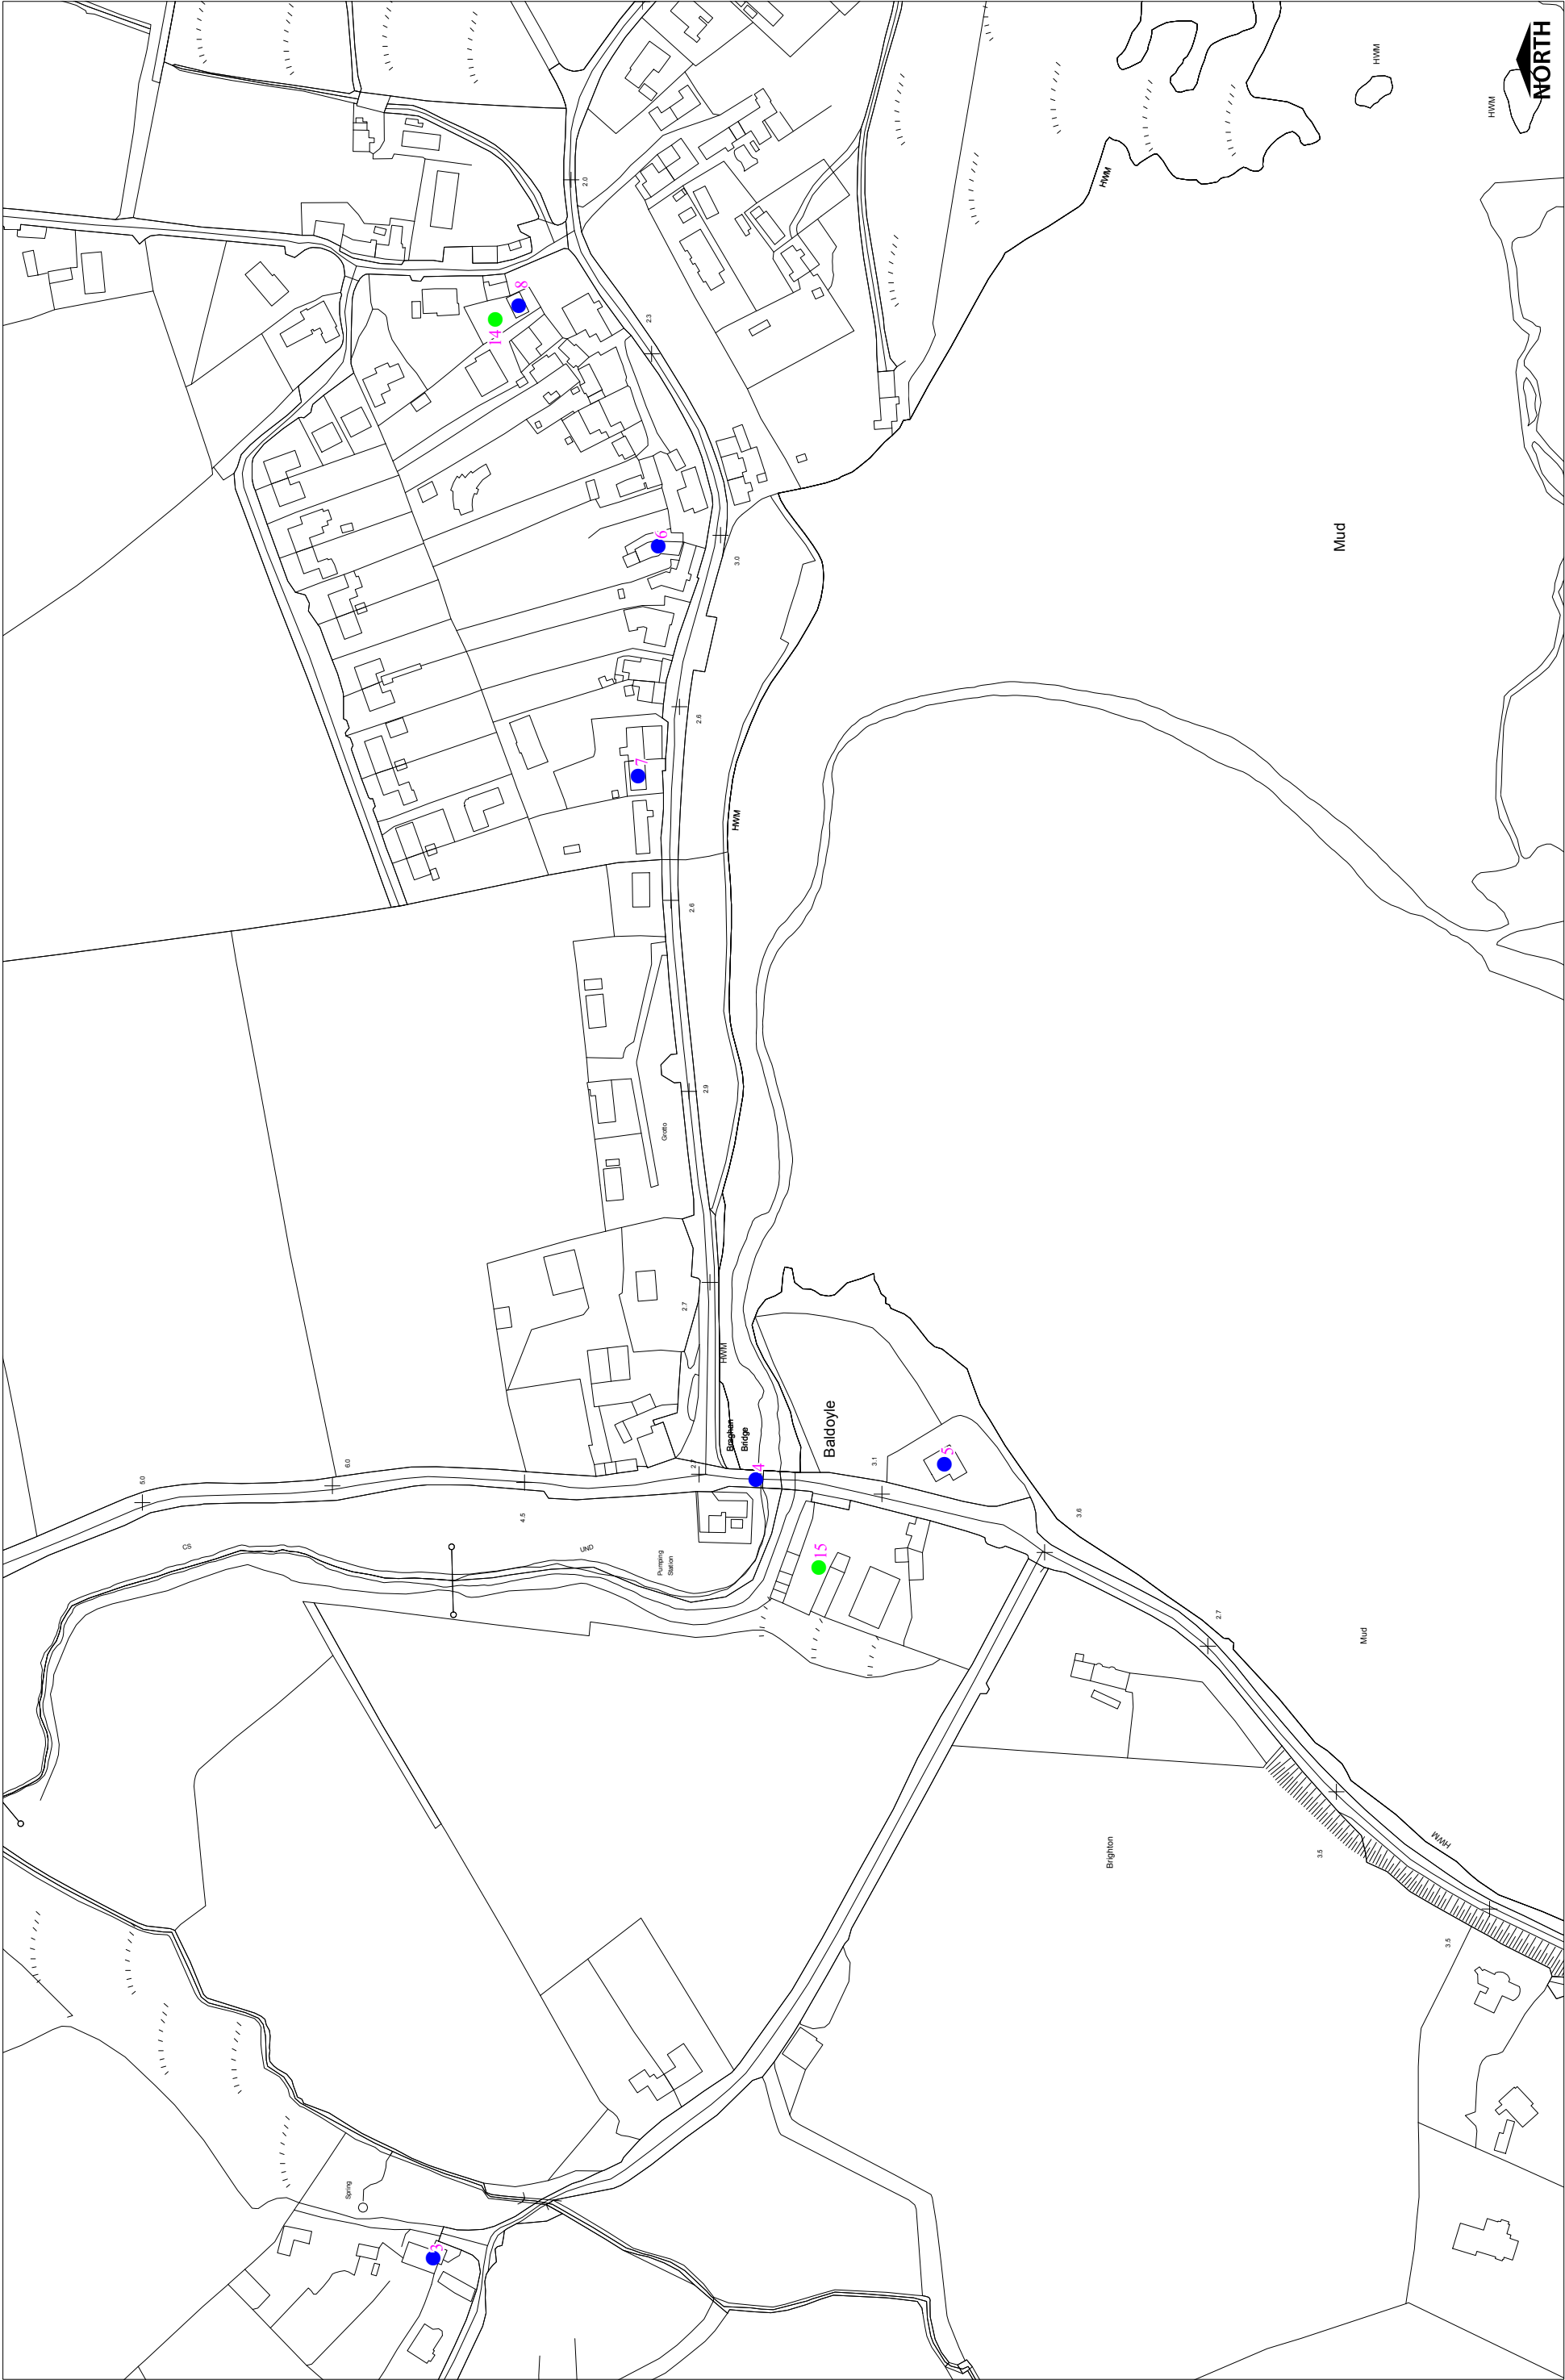

Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie




Note: Details shown on this map are for information purposes only.
Further details on any item should be clarified with Louth County Council.
The map has been produced by Louth County Council with available Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number 2009/00/CCLMA/LouthLocalAuthorities.

Not to scale when printed A3 Landscape

Louth County Council Record of Protected Structures Sheet No 25(a) Baltray

- Protected Structure
- Proposed Protected Structure
- Proposed to be deleted from Register of Protected Structures

All Protected Structures within this boundary are in the Dundalk & Environs Plan

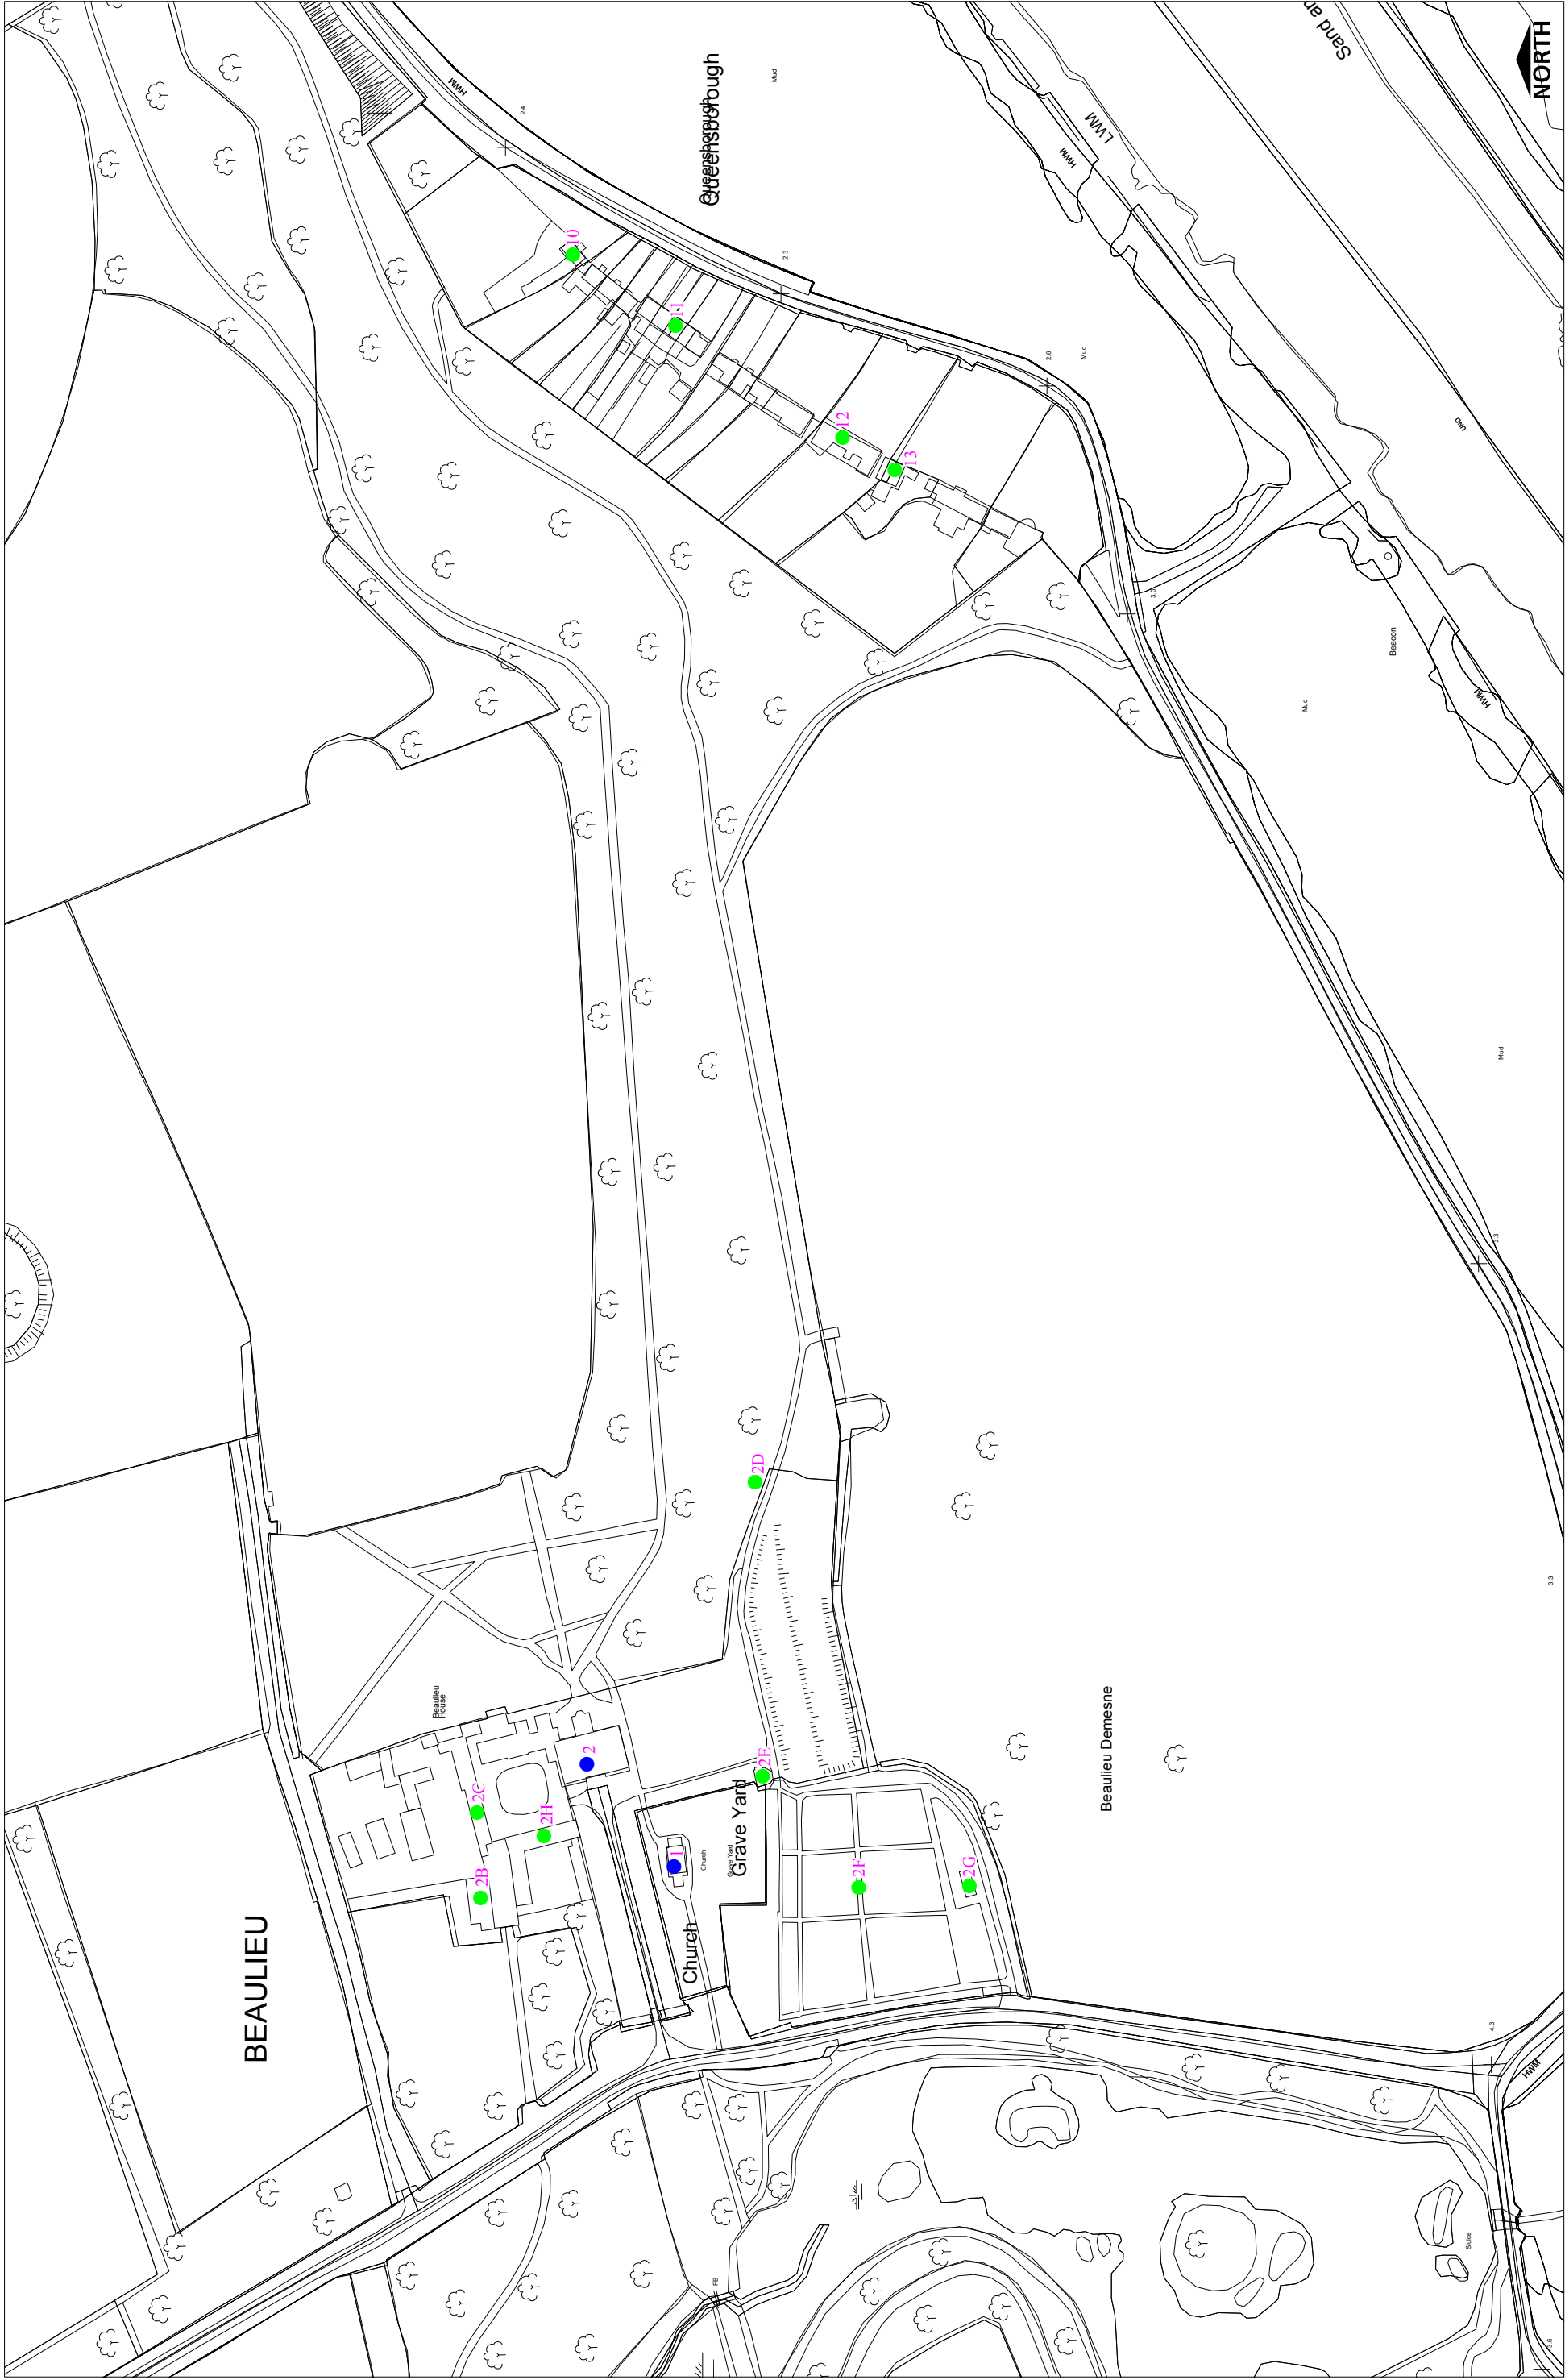

Planning Department
Louth County Council
County Hall, Millennium Centre,
Saint Alphonsus Road, Dundalk.
Telephone: 042 9353180
E-Mail: planning@louthcoco.ie

Note: Details shown on this map are for information purposes only.
Further details on any item should be clarified with Louth County Council.
The map has been produced by Louth County Council with available Ordnance Survey data.
(C) Ordnance Survey Ireland. All rights reserved. License Number 2009/00/CCLMA/LouthLocalAuthorities.

Not to scale when printed A3 Landscape

Louth County Council Record of Protected Structures Sheet No 25(b) Quinnsborough

- Protected Structure
- Proposed Protected Structure
- Proposed to be deleted from Register of Protected Structures

All Protected Structures within this boundary are in the Dundalk & Environs Plan

Draft Louth County Development Plan 2009 - 2015.
Record of Protected Structures.

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Existing Protected Structure	Lhs025-001	25	Beaulieu	Beaulieu Church	Church	Freestanding Church of Ireland church, built 1807. Rectangular-plan nave, engaged two-stage square tower to west, projecting rendered chancel to east. incl. Graveyard monuments.	13902506
Existing Protected Structure	Lhs025-002	25	Beaulieu	Beaulieu House & Demesne	House	Detached two-storey with dormer attic country house, built c. 1715, incorporating fabric of earlier building.	13902509
Proposed Protected Structure	LHS025-002B	25	Beaulieu	Beaulieu House Outbuilding	Outbuilding (Non Domestic)	Detached multiple-bay single-storey with attic brick farm building, built c. 1760. Rectangular-plan, lean-to extension to north.	13902507
Proposed Protected Structure	LHS025-002C	25	Beaulieu	Beaulieu House Outbuilding	Outbuilding (Non Domestic)	Attached single-storey farm building, constructed c. 1790. Rectangular-plan, attached to building to east.	13902508
Proposed Protected Structure	LHS025-002D	25	Beaulieu	Beaulieu House Icehouse	Icehouse	Freestanding subterranean ice house, built c. 1740, now disused. Six rubble stone steps to square-headed entrance, droved ashlar lintel with red brick jambs, rubble stone walled chamber. Located to south-east of Beaulieu House, within the gardens.	13902510
Proposed Protected Structure	LHS025-002E	25	Beaulieu	Beaulieu House Garden Structure	Summerhouse	Detached garden structure, built c. 1760. Cantled three-sided southern section, tetrastyle pedimented Doric portico with painted timber columns to east elevation c. 1900	13902511
Proposed Protected Structure	LHS025-002F	25	Beaulieu	Beaulieu House Walled Garden	Walled Garden	Red brick walled garden, built c. 1750.	13902512
Proposed Protected Structure	LHS025-002G	25	Beaulieu	Beaulieu House Gardener's House	House	Detached single-bay single-storey red brick gardener's house, built c.1840, now disused.	13902513
Proposed Protected Structure	LHS025-002H	25	Beaulieu	Beaulieu House Stables	Stables	Detached nine-bay single-storey stable block, built c. 1870. Rectangular-plan with single-storey lean-to range to south-west and single-storey pitched roof range to north-west with exercise yard between, bounded by brick wall to west.	13902514
Proposed Protected Structure	LHS025-002I	25	Beaulieu	Beaulieu House Worker's Houses	House	Pair of semi-detached two-bay two-storey estate worker's houses, built c. 1910. Rectangular-plan, single-storey rendered lean-to extensions, c. 1970, to west.	13902519
Existing Protected Structure	Lhs025-003	25	Baltray	Baltray Thatch	House	Detached four-bay single-storey thatched house, built, c. 1830. Rectangular-plan, shallow bow window to west, flat-roofed extension and portico to east - OPW site 69	13902527
Existing Protected Structure	Lhs025-004	25	Braghan	Braghan Bridge	Road Bridge	Three-arch stone bridge.	13902524
Existing Protected Structure	Lhs025-005	25	Banktown	Banktown Thatch	Thatched Cottage	Detached three-bay single-storey with attic thatched house, built c. 1830.	13902525
Existing Protected Structure	LHS025-006	25	Baltray	Baltray Thatch	Thatched Cottage	Detached four-bay single-storey thatched direct-entry house, built c. 1780, now disused. Rectangular-plan with curve to north, house abutting to south.	13902520

Draft Louth County Development Plan 2009 - 2015.
Record of Protected Structures.

Status	ID	Map Sheet	Address	Name	Description	Notes	NIAH Number
Existing Protected Structure	LHS025-007	25	Baltray	Saint Anne's Thatch/tu Naomh Aine	Thatched Cottage	Semi-detached four-bay single-storey with attic thatched lobby-entry house, built c. 1780. Rectangular-plan, porch to south, extension to north.	13902523
Existing Protected Structure	Lhs025-008	25	Baltray	Baltray Thatch	Thatched Cottage	Three-bay single storey stone walled whitewashed thatched cottage with attic and lean-to at front. direct-entry house, built c. 1780. Rectangular-plan. - OPW site 74	13902521
Proposed Protected Structure	LHS025-009	25	Baltray	Baltray Beacons	Harbour/dock	Freestanding beacons, built c. 1820. Cylindrical-profile, random rubble limestone walling, conical caps. Located at estuary of Boyne River and marking shipping channels at approach to Drogheda harbour.	13902501
Proposed Protected Structure	LHS025-010	25	Queensborough, Beaulieu	Farmhouse	Farm House	Detached T-plan two-storey house comprising three-bay south block with gable-fronted south porch, built c. 1840, attached to south gable of multiple-bay earlier block and having lean-to extension to north c. 1920.	13902502
Proposed Protected Structure	LHS025-011	25	Beaulieu □□Queensborough□□	Former Coastguard Station	Coastguard Station	Terraced two-bay two-storey former coastguard house, dated 1943, built to replace similar structures burned c. 1920. Now in private domestic use. One of a terrace of six, L-plan, lean-to extension to north, porch to south	13902503
Proposed Protected Structure	LHS025-012	25	Baltray Road,□□Beaulieu	Queensborough House	House	Attached five-bay two-storey over basement house, built c. 1780. Single-bay block to north, return and flat-roofed extensions to west, attached to north and south to single and two-storey houses	13902504
Proposed Protected Structure	LHS025-013	25	Beaulieu		House	Attached two-storey house, built c. 1840. Now forming single dwelling with house to south. Rectangular-plan, two-storey single-bay gable-fronted north block with oriel window to east, single-storey extension to south, c. 1970, with sunroom to south elevation.	13902505
Proposed Protected Structure	LHS025-014	25	Baltray	Six-bay Single-storey house	House	Attached six-bay single-storey house, built c. 1830. Rectangular-plan cranked to north, flat-roofed porch to west. Originally terrace of houses, some amalgamated to make this house c. 1920.	13902522
Proposed Protected Structure	LHS025-015	25	Braghan	Corn Shed / Barn	Barn	Detached three-bay single-storey stone corn shed, built c. 1860.	13902526
Proposed Protected Structure	LHS025-017	25	Beltichburne	Beltichburne House	Country House	Detached multiple-bay two-storey with attic house, built c. 1860. Asymmetrical-plan, central open-bed pediments to north and south elevations, canted bay windows to south and west, conservatory to south elevation	13902528
Proposed Protected Structure	LHS025-018	25	Beltichburne	Beltichburne Coachhouse	House	Detached three-bay two-storey house, built c. 1780, part of a complex of formerly outbuildings attached to Beltichburne demesne, now in private domestic use.	13902529
Proposed Protected Structure	LHS025-019	25	Beltichburne	Beltichburne Gate Lodge	Gate Lodge	Detached three-bay two-storey red brick former gate lodge, built c. 1860, now in private domestic use. Apsidal porch to west, extension to east	13902530
Proposed Protected Structure	LHS025-020	25	Beltichburne	Beltichburne Cottage	House	Detached five-bay single-storey house, built c. 1830. Gabled slightly projecting porch to centre of main block, two-storey pitched roof wing to west with gable facing south, other buildings to north-west not seen.	13902531